





CUSTOMER COPY

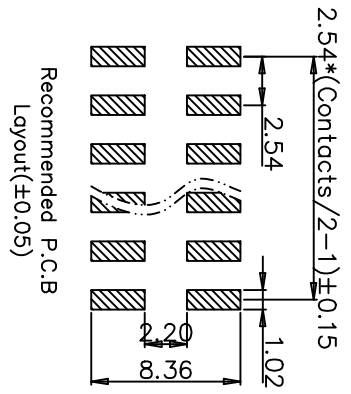

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

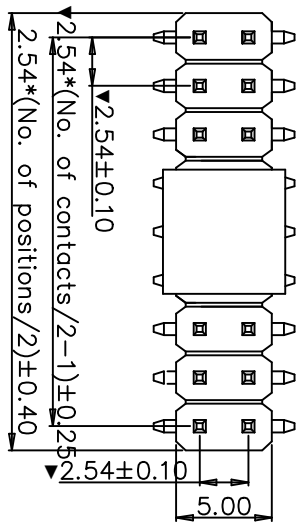

Technical Data
 Contact: brass C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 0.8Kgf/contact per layer min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5° 5S
 Critical Dimensions: ▼

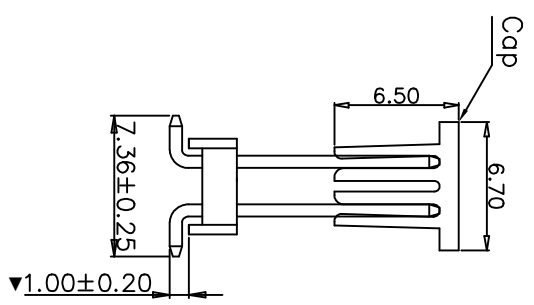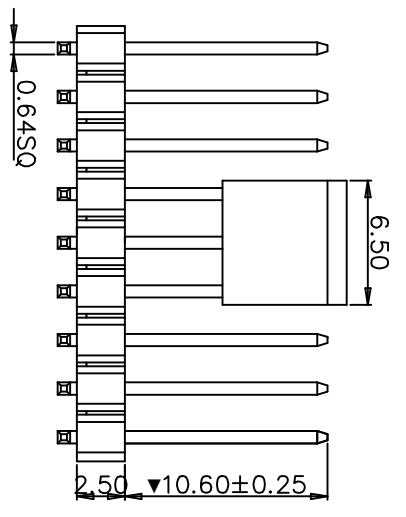

Ordering information

QHD2 25 1 - P XX X X C 180

High Option
25: H±2.50mm

No. of Positions
04-80

Plating Option
A: GF
B: Au3μ"
C: Au5μ"
D: Au10μ"
H: GF/Sr120μ"
S: Sr120μ"
Z: Special (underline option is standard)

Insulator Material Option
F: BK-LCP
G: BK-PA9T
S: Special (underline option is standard)

Serial No.
01-99

Packing	
1. General	
2. Tape&Reel	√
3. Tube	X.XX ±0.20
4. Tray	X.X ±0.30
5. Other	X. ±0.50

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:
ANGLE ±2°		Pinhd2.54*H2.50mm Pin Header
DATE	2021/01/13	Dual Row SMT Type
DRAWN	WEI.ZHANG	CUSTOMER P/N: N/A
CHECKED		DRAWING NO.: QHD25IPC180
APPROVED		SCALE: 1:1 SHEET: 1/1

