





CUSTOMER COPY

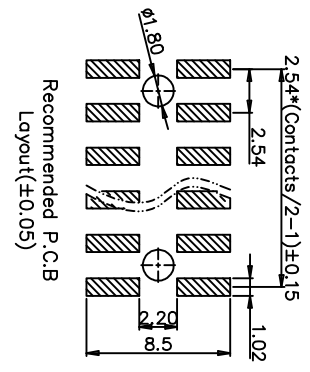

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

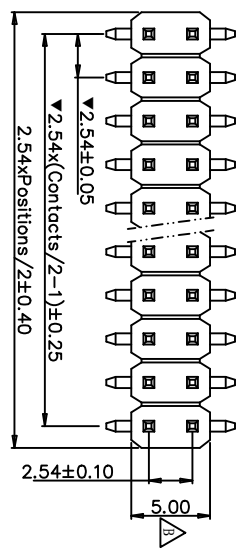

Technical Data  
 Contact: brass C2700(Cuzn35)  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester  
 Current rating: 3Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 550V AC/minute  
 Retention force: 0.5kgf/contact per layer min.  
 Operating temperature: -55°C to +105°C  
 Soldering temperature: 260°C±5 SS  
 Critical Dimensions: ▼

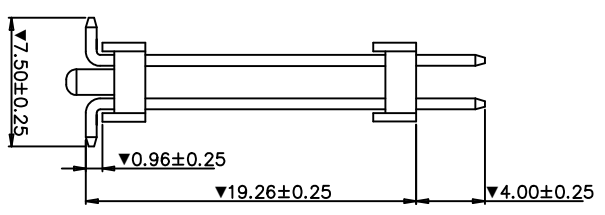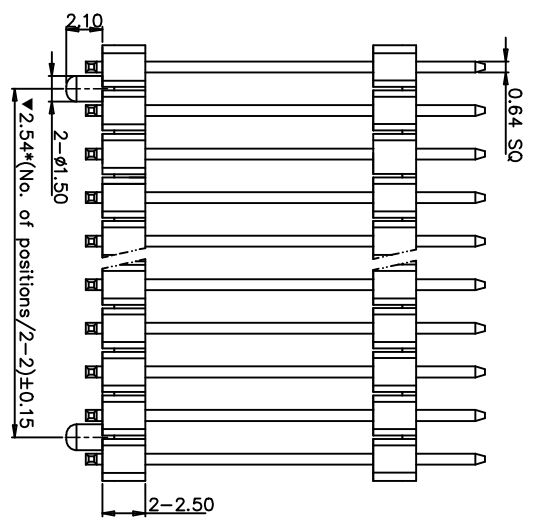

Ordering information

QHD2 25 2 - P XX X X B 39

High Option  
25: H=2.50mm

No. of Positions  
02-80

Plating Option  
A GF  
B Au3μ"  
C Au5μ"  
D Au10μ"  
H GF/5μ120μ"  
S Smt20μ"  
Special

Insulator Material Option  
A BK-FBT  
F BK-LCP  
G BK-PABT  
S Special

Serial No.  
01-999

Packing	
1. General	
2. Tape&Reel	
3. Tube	√
4. Tray	
5. Other	

TOLERANCE: ANGLE ±2°		PROJECTION		TITLE:	
X.XXX ±0.05	DATE	2017/11/06	Pitch2.54*H2.50mm Pin Header Double Row SMT Type B=4.0W2=7.5mm		
X.XX ±0.25	DRAWN	江国注	CUSTOMER:	N/A	CUSTOMER P/N:
X.X ±0.35	CHECKED	雷邦军	PART NO.:		DRAWING NO.:
X. ±0.50	APPROVED	冯显东	SIZE:	A4	QHD2252PB39
			UNITE:	mm	
			SCALE:	1:1	
			SHEET:	1/1	

natconn 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

6 5 4 3 2 1