



CUSTOMER COPY

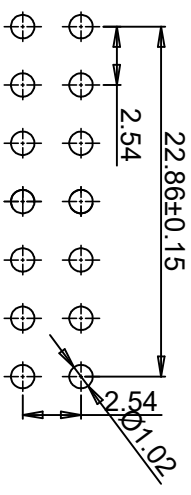



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

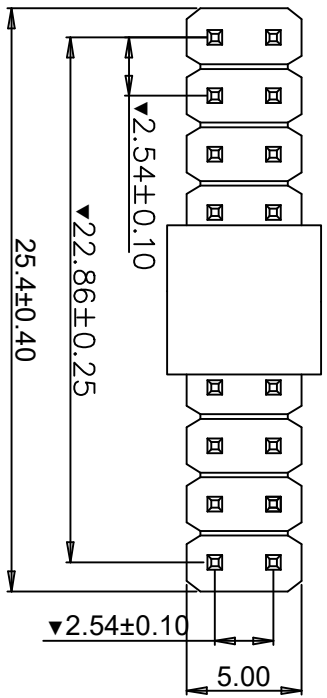

Recommended P.C.B
Layout(±0.05)

Technical Data
 Contact: brass JIS C2700(H65)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0

Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 0.8Kgf/contact min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C±5° SS
 Critical Dimensions: ▼

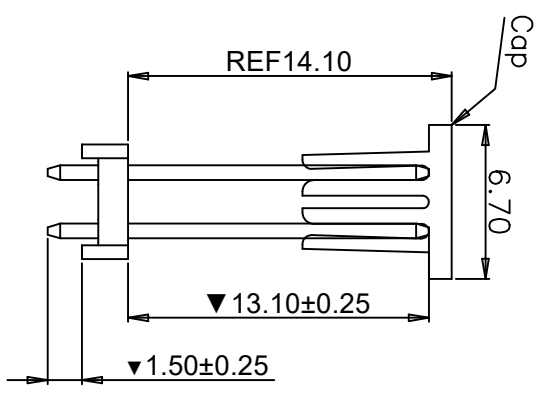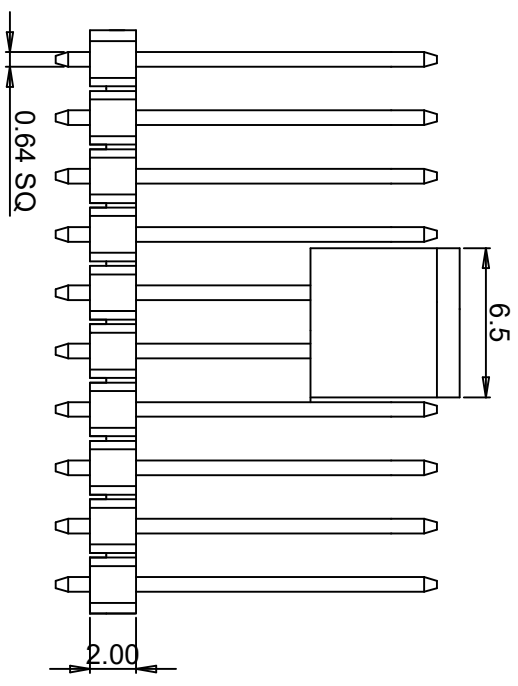

Ordering information

QHA2 20 1 - P 20 A G C 27

High Option
20: H=2.00mm

No. of Positions
02-80

Plating Option
A: Au30"
B: Au50"
C: Au100"
D: Au100"
H: Gf/Sn120u"
S: Sn120u"
Z: Special (Underline option is standard)

Insulator Material Option
A: BK-PBT
F: BK-LCP
G: BK-PA9T
S: Special (Underline option is standard)

Series No.
01-999

Packing	TOLERANCE:
1. General	ANGLE ±2°
2. Tape&Reel	X.XXX ±0.05
3. Tube	X.XX ±0.25
4. Tray	X.X ±0.35
5. Other	X. ±0.50

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

PROJECTION	TITLE:	CUSTOMER:	CUSTOMER P/N:	REV:
DATE: 2024/06/14	2.54mm Pin Header Dual Row Straight Type	班洪德	N/A	N/A
DRAWN		PART NO.:	DRAWING NO.:	REV:
CHECKED			QHA2201P20AGC27	A
APPROVED		SIZE: A4	UNIT: mm	SCALE: 1:1
				SHEET: 1/1