



CUSTOMER COPY


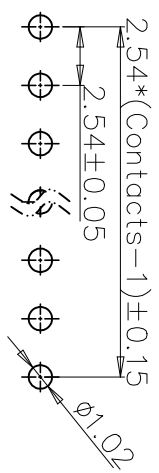


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

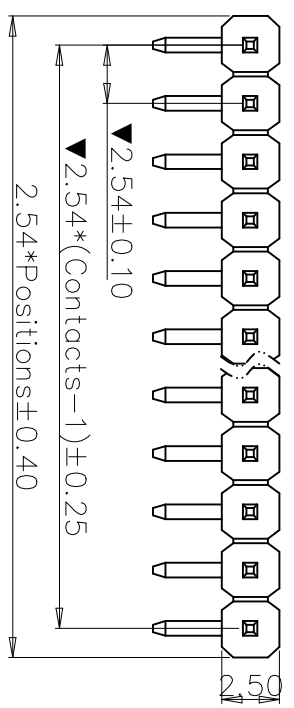

Recommended P.C.B
Layout(±0.05)

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 3Amps
 Voltage rating: 250V
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 1Kgf/contact min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

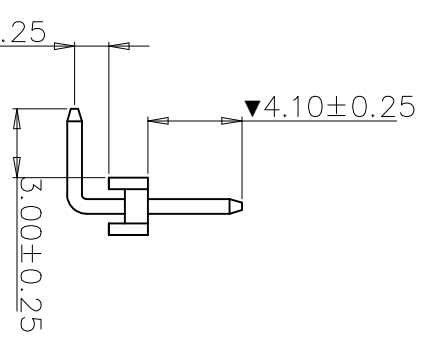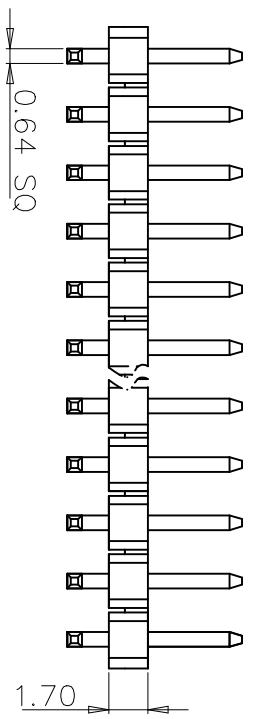

Ordering information

QHB1 17 1 - P XX X X A 39

High Option
17: H=1.70mm

No. of Positions
01-40

Plating Option
A: GFE
B: Au30"
C: Au50"
D: Au100"
S: Sn120p"
Z: Special (Underline option is standard)

Insulator Material Option
A: BK-PBT
F: BK-LCP
G: BK-PA9T
S: Special (Underline option is standard)

Type Option
A: Normal
C: With cap

Serial No.
01-999

Packing	TOLERANCE:
1. General	ANGLE ±2°
2. Tape&Reel	X.XXX ±0.05
3. Tube	X.XX ±0.20
4. Tray	X.X ±0.30
5. Other	X. ±0.50

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

PROJECTION	TITLE:	CUSTOMER:	CUSTOMER P/N:	REV:
DATE: 2010/08/16	1.70mm Pin Header Single Row Right Angle	N/A	N/A	N/A
DRAWN: 唐建平		PART NO.:	DRAWING NO.:	REV:
CHECKED: 于松		QHB1171PA39		A
APPROVED: 张丰志		SIZE: A4	UNIT: mm	SCALE: 2:1
				SHEET: 1/1

6 5 4 3 2 1