





CUSTOMER COPY

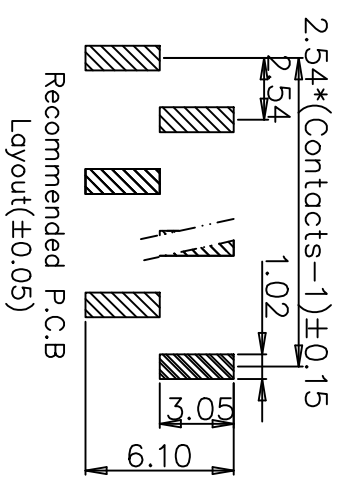

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

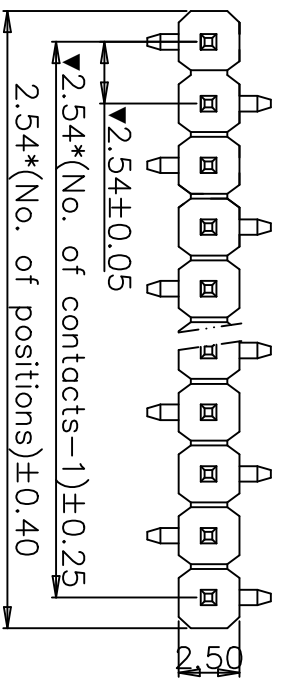

Technical Data
 Contact: brass C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 0.5kgf/contact per layer min.
 Operating temperature: -55°C to +105°C(Sn plated)
 -55°C to +125°C(Au plated)
 Soldering temperature: 260°C±5 5S
 Critical Dimensions: ▼

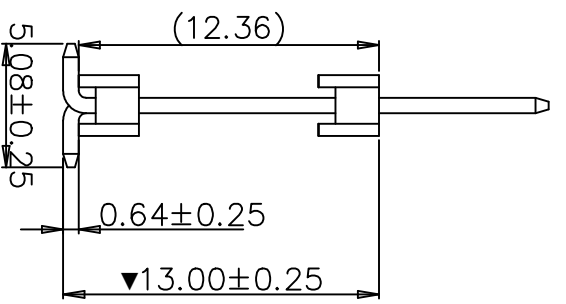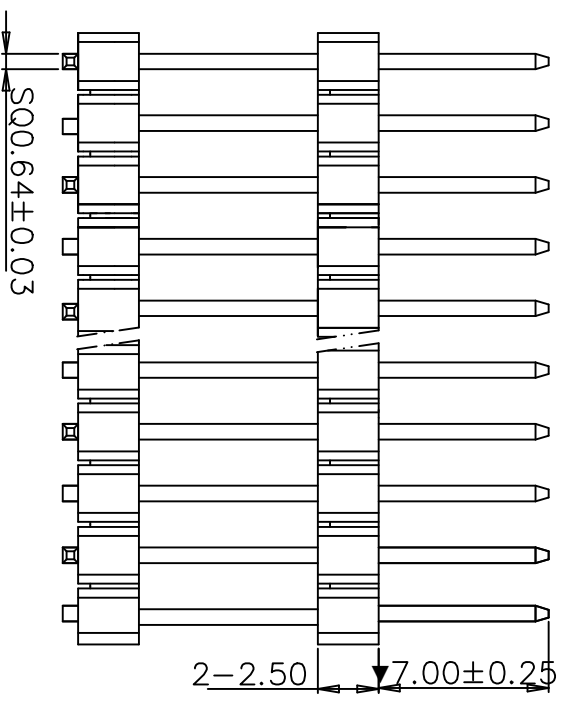

Ordering information

QHD1 25 - P XX X X A 12

High Option 25: H=2.5mm

No. of Positions 02-80

Plating Option
 A: GfE
 B: Au3μ"
 C: Au5μ"
 D: Au10μ"
 H: GF/Sn120μ"
 S: Sn120μ"
 Z: Special (Underline option is standard)

Insulator Material Option
 F: BK-LGP
 G: BK-FABT
 S: Special (Underline option is standard)

Serial No. 01-999

Packing		nateconn		广东纳特康电子股份有限公司	
1. General		GUANGDONG NATCONN ELECTRONIC CO.,LTD			
2. Tape&Reel		TOLERANCE: ANGLE ±2°		PROJECTION	
3. Tube		X.XXX ±0.05		DATE 2017/07/20	
4. Tray		X.XX ±0.25		DRAWN 王伟超	
5. Other		X.X ±0.35		CHECKED 唐建平	
		X. ±0.50		APPROVED 冯显东	
		TITLE: 2.54mm Board Spacer Dual Row		CUSTOMER: N/A	
		SMT W=5.08mm		PART NO.: QHD1252PA12	
		SCALE: 1:1		DRAWING NO.: QHD1252PA12	
		SHEET: 1/1		REV: A	

6 5 4 3 2 1