



CUSTOMER COPY

6 5 4 3 2 1


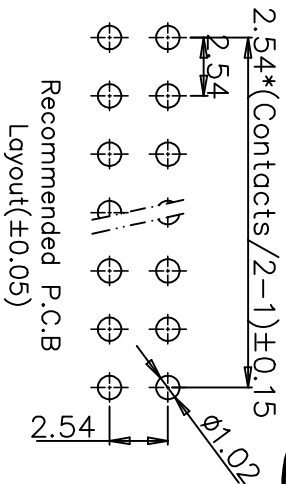


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

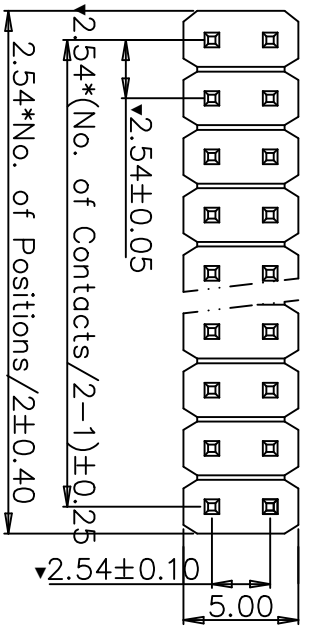

Technical Data
 Contact: brass JIS C2800(Cuzn40)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0

Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 0.8Kgf/contact per layer min.
 Operating temperature: -40°C to+105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

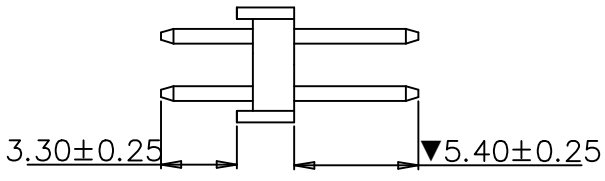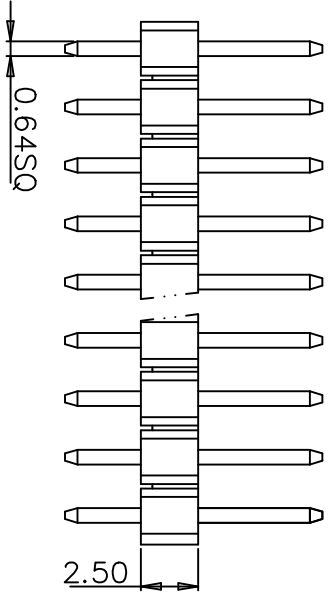

Ordering information

QHA2 25 1 -P XX X X A 260

High Option
25: H=2.50mm

No. of Positions
02-80

Plating Option
A: GFE
B: Au3μ"
C: Au5μ"
D: Au10μ"
H: GF/Sn120μ"
S: Sn120μ"
Z: Special (Underline option is standard)

Insulator Material Option
A: BK-PBT
F: BK-LDP
G: BK-PA9T
S: Special (Underline option is standard)

Serial No.
001-999

Packing

1. General ✓
 2. Tape&Reel ✓
 3. Tube ✓
 4. Tray ✓
 5. Other X

natconn

广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°
 PROJECTION: DATE: 2014/04/04
 DRAWN: 于松
 CHECKED: 唐建平
 APPROVED: 冯显东

TITLE: Pitch:2.54*H2.50mm Pin Header
 Dual Row Straight Type

CUSTOMER: N/A
 PARTNO.: QHA2251PA260
 DRAWING NO.: QHA2251PA260

SIZE: A4 UNIT: mm SCALE: 3:1 SHEET: 1/1

6 5 4 3 2 1