CUSTOMER COPY

RoHS compliant

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

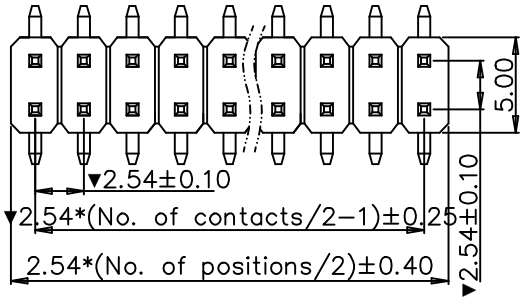

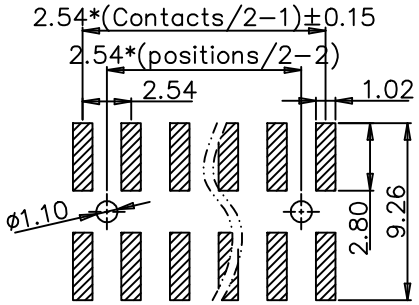

Recommended P.C.B Layout(±0.05)

Technical Data

Contact:	brass C2700(Cuzn35)
Contact plating:	see ordering information
Insulator:	black glass filled polyester UL94V−0
Current rating:	3Amps
Contact resistance:	20mΩ max.
Insulation resistance:	1000MΩ min. at 100V
Withstanding Voltage:	550V AC/minute
Retention force:	0.8Kgf/contact per layer min.
Operating temperature:	−55°C to+105°C
Soldering temperature:	260°C±5° 5S
Critical Dimensions:▼	

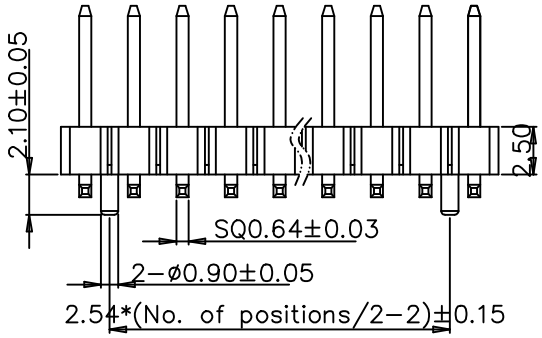

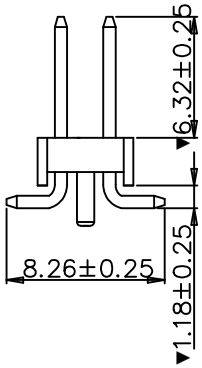

Ordering information

QHD2	25	1 - P	XX	X	X	B	149
	High Option 25: H=2.50mm		No. of Positions 04~80	Plating Option A G/F B Au3μ" C Au5μ" D Au10μ" S Sn120μ" Z Special	Insulator Material Option F BK-LCP G BK-PA9T S Special		Serial No. 01~99

Packing	
1.General	√
2.Tape&Reel	
3.Tube	√
4.Tray	
5.Other	

natconn ® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION		TITLE: Pitch2.54*H2.50mm Pin Header Dual Row SMT Type,B=6.32,D=1.18,W2=8.26		
ANGLE ±2°	DATE	2018/08/24			
X.XXX ±0.05	DRAWN	江国注	CUSTOMER: N/A	CUSTOMER P/N: N/A	REV: N/A
X.XX ±0.20	CHECKED	雷邦军	PART NO.:	DRAWING NO.: QHD2251PB149	REV: A
X.X ±0.30	APPROVED	冯显东	SIZE: A4 / UNIT: mm	SCALE: 1:1	SHEET: 1/1
X. ±0.50					