





CUSTOMER COPY

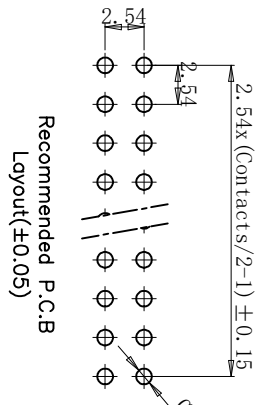

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

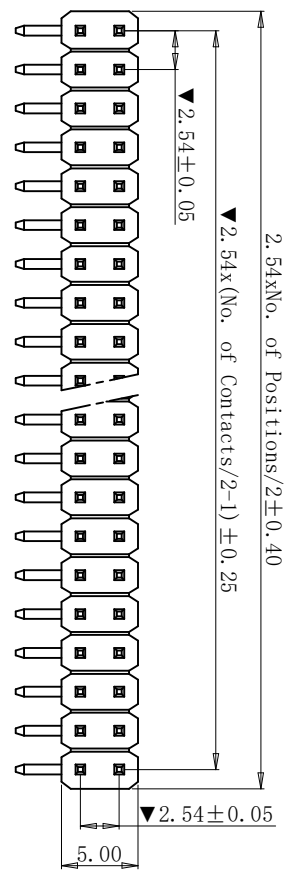

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 0.8Kgf/contact min.
 Operating temperature: -40°C to+105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

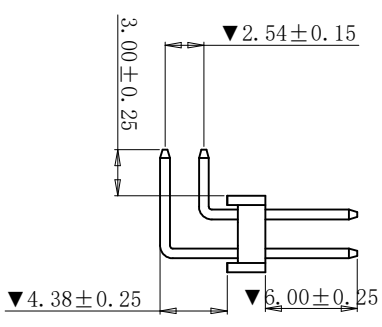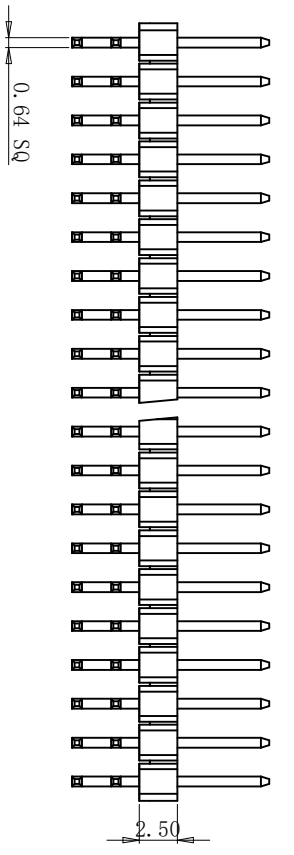

Ordering information

QHB2 25 1 - P XX X X A 01

High Option
25: H=2.50mm

No. of Positions
02-80

Plating Option
A: GFE
B: Au30"
C: Au50"
D: Au100"
H: GFSn/20μ"
S: Sn/20μ"
Z: Special (Underline option is standard)

Insulator Material Option
A: BK-PBT
F: BK-LCP
G: BK-PA9T
S: Special (Underline option is standard)

Type Option
A: Normal

Serial No.
01-99

Packing	
1. General	√
2. Tape&Reel	X.XXX ±0.05
3. Tube	X.XX ±0.20
4. Tray	X.X ±0.30
5. Other	X. ±0.50

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:		PROJECTION		TITLE:	
ANGLE	±2°	DATE	2014/10/08	Pitch: 2.54*H2.54mm Pim Header Dual Row Right Angle: A=3.0, B=6.0	
DRAWN	邹丽婷	CUSTOMER:	N/A	CUSTOMER P/N:	N/A
CHECKED	于松	PART NO.:		DRAWING NO.:	QHB2251PA01
APPROVED	张丰志	SIZE:	A4	UNIT:	mm
		SCALE:	2:1	SHEET:	1/1

6	5	4	3	2	1
---	---	---	---	---	---