

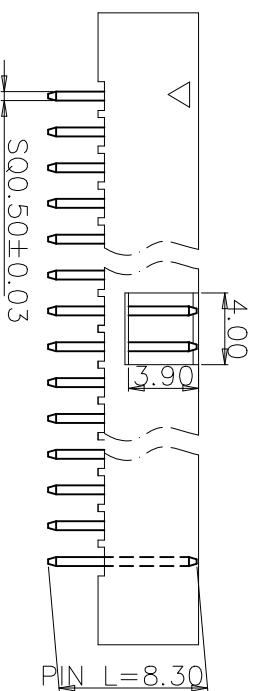


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
C		Pin L change to 8.3mm	2010-09-04	Sullen

Technical Data

Contact: brass JIS C2700(Cuzn35)  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester  
 UL94V-0  
 Current rating: 1.5Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 550V AC/minute  
 Retention force: 1Kgf/contact min.  
 Operating temperature: -55°C to +105°C  
 Soldering temperature: 245°C±5° 5S  
 Critical Dimensions: ▼

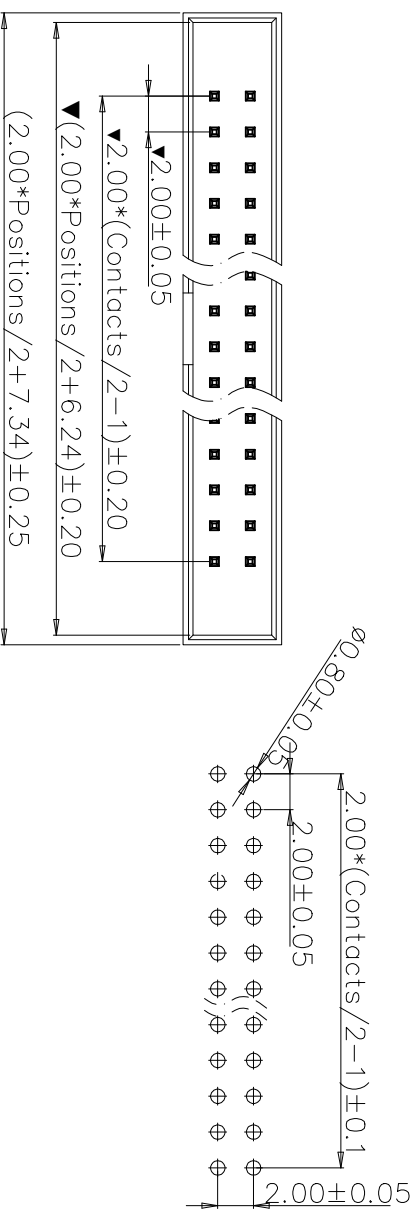

Ordering information

**BFA** **XX** **-** **X** **X** **A** **01**

No. of Positions: 06-68

Plating Option:  
 A: GfE  
 B: Au30µ"  
 C: Au50µ"  
 D: Au100µ"  
 H: GF/Sn120µ"  
 Z: Sn120µ"  
 Special (Underline option is standard)

Insulator Material Option:  
 A: BK-PBT  
 F: BK-LCP  
 G: BK-PAET  
 S: Special (Underline option is standard)

Type Option: A Normal

Series No.: 01-999

Packing	
1. General	
2. Tape & Reel	
3. Tube	√
4. Tray	
5. Other	

<b>natconn</b> <sup>®</sup> 广东纳特康电子股份有限公司 GUANGDONG NATCONN ELECTRONIC CO.,LTD		TOLERANCE: ANGLE ±2°		TITLE: Pitch: 2.00*2.00mm Box Header	
		Straight Dip Type, Dip=2.8mm		CUSTOMER P/N: N/A	
DATE	2017/03/30	CUSTOMER P/N:	N/A	REV:	N/A
DRAWN	雷邦军	DRAWING NO.:	N/A	REV:	N/A
CHECKED		PART NO.:	N/A	REV:	C
APPROVED		SIZE:	A4	UNIT:	mm
		SCALE:	1:1	SHEET:	1/1

6 5 4 3 2 1