


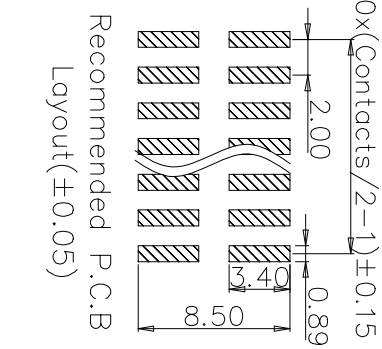


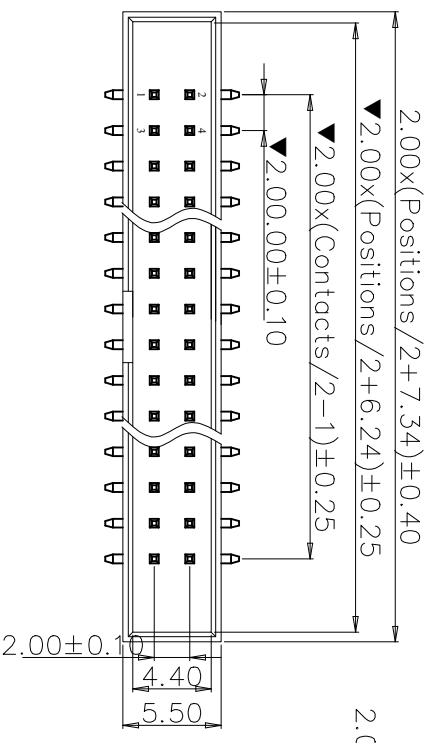

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED



Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 1.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Retention force: 0.8Kgf/contact min.
 Operating temperature: -55°C to+105°C
 Soldering temperature: 260°C±5° 5S
 Critical Dimensions:▼

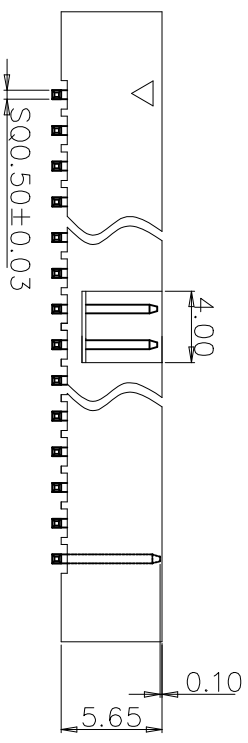

Ordering information

BFD XX X X A 01

No. of Positions: 06-68

Plating Option:
 A Au3I*
 B Au3I*
 C Au3I*
 H Gr5Sn120u*
 S Sn120u*
 Z Special (Underline option is standard)

Insulator Material Option:
 F BK-LCP
 G BK-2901
 S BK-2901 (Underline option is standard)

Type Option:
 A Normal Type

Series No.: 01-899



广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

Packing		TOLERANCE: ±2°		PROJECTION		TITLE:	
1. General		ANGLE	±2°	DATE	2014/08/28	Pitch:2.0*2.0mm Box Header	
2. Tape&Reel	✓	X.XXX	±0.05	DRAWN	雷邦军	CUSTOMER:	N/A
3. Tube		X.XX	±0.25	CHECKED	唐建平	PART NO.:	N/A
4. Tray		X.X	±0.35	APPROVED	冯显东	DRAWING NO.:	BFDXX-XXA01
5. Other		X.	±0.50	SIZE:	A4	UNIT:	mm
				SCALE:	1:1	SHEET:	1/1