




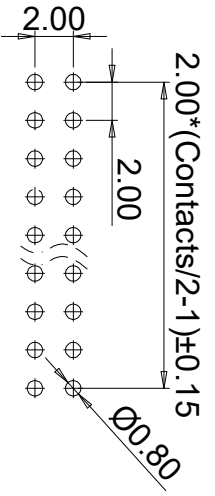


| REVISION DATA | | | | |
|---------------|-----|-------------|------|----------|
| SYM | ECN | DESCRIPTION | DATE | APPROVED |
| | | | | |
| | | | | |

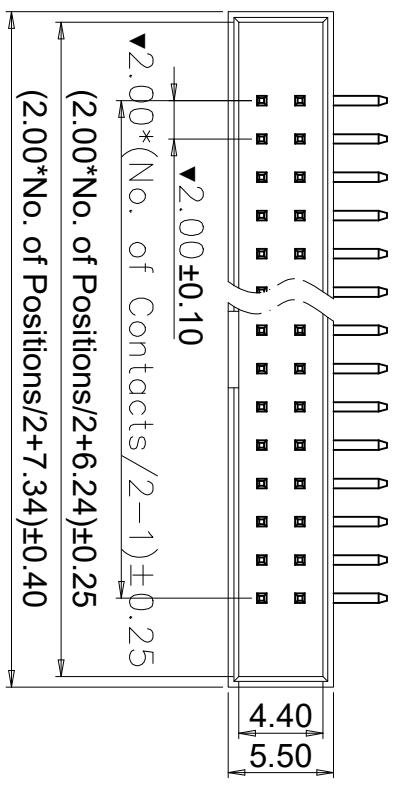

Recommended P.C.B Layout(±0.05)

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 1.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Retention force: 0.6Kgf/contact min.
 Operating temperature: -55°C to+105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

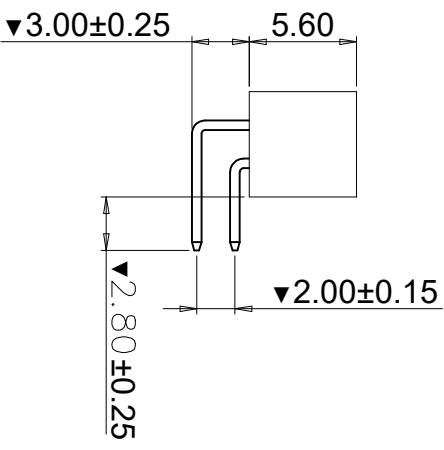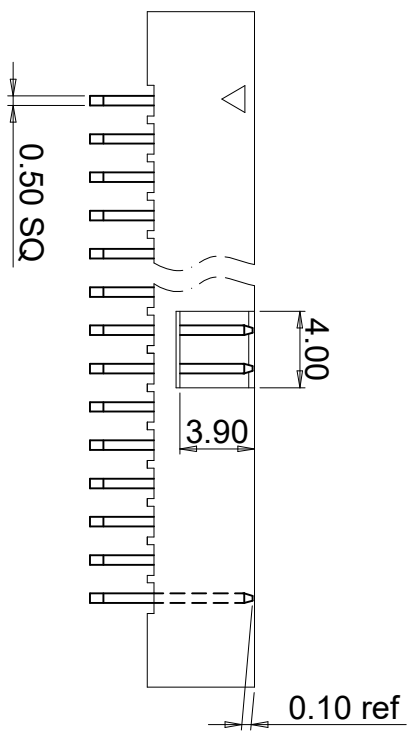

Ordering information

BFB **XX** - **X** **X** **A** **01**

| | | | | |
|----------------------------|---|---|--|----------------------|
| No. of Positions 06-68P | Plating Option A G/F B Au30" C Au10" D Gr/Sn120u" H Sn120u" Z Special (Underline option is standard) | Insulator Material Option A BK-FBT B BK-LCP C BK-FABT S Special (Underline option is standard) | Type Option A Normal B With peg C With cap D With post & cap | Series No. 01-999 |
|----------------------------|---|---|--|----------------------|



广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

| Packing | | TOLERANCE: ANGLE ±2° | | PROJECTION | | TITLE: | |
|-------------|----|----------------------|-------|------------|------------|---------------|-----------------------------|
| 1.General | | X.XXX | ±0.05 | DATE | 2014/07/30 | CUSTOMER: | Pitch2.00*H5.6mm Box Header |
| 2.Tape&Reel | | X.XX | ±0.25 | DRAWN | 雷邦军 | CUSTOMER P/N: | Right Angle Type,Dip=2.8mm |
| 3.Tube | | X.X | ±0.35 | CHECKED | 唐建平 | PART NO.: | |
| 4.Tray | √ | X.X | ±0.50 | APPROVED | 冯显东 | SIZE: | A4 |
| 5.Other | X. | | | | | UNIT: | mm |
| | | | | | | SCALE: | 1:1 |
| | | | | | | SHEET: | 1/1 |