

CUSTOMER COPY





REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

40.64±0.40

▼38.44±0.25



▼30.48±0.25

▼2.54±0.10

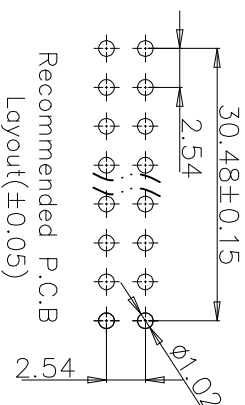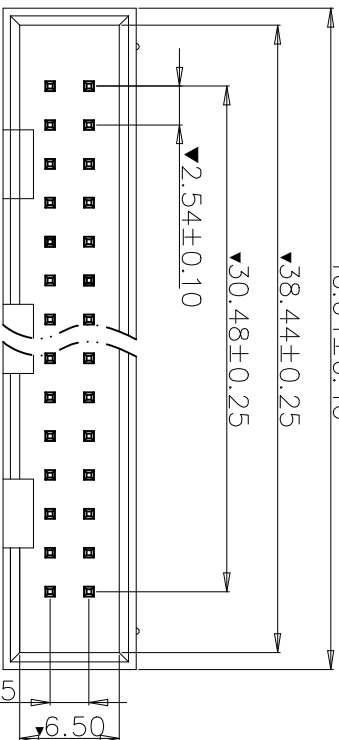

Recommended P.C.B.
Layout(±0.05)

Technical Data
 Contact: brass C2700(CuZn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 0.8Kgf/contact min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±10° 5S
 Critical Dimensions: ▼

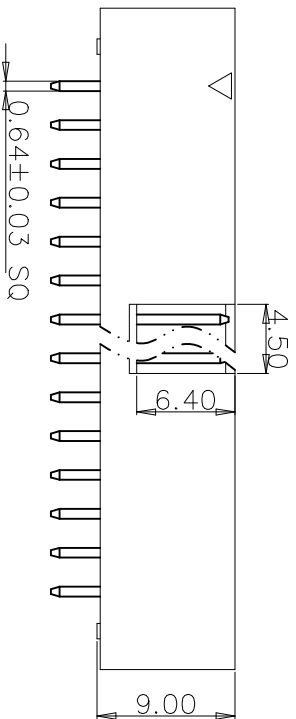

Ordering information

BHA

26

X

X

A

02

No. of Positions
06-64
(06/08/10/12/14/16/18/
20/24/26/28/30/34/40/
48/50/60/64)

Plating Option
A G/FE
B Au30"
C Au30"
D Au100"
H GF/Sn120u"
S Sn120u"
Z Special
(Underline option is standard)

Insulator Material Option
A BK-FBT
B BK-LCP
C BK-FABT
S Special
(Underline option is standard)

Type Option
A Normal
B With peg
C With cap
D With post & cap

Series No.
01-999

Packing

1. General	ANGLE ±2°
2. Tape&Reel	X.XXX ±0.05
3. Tube	X.XX ±0.20
4. Tray	X.X ±0.30
5. Other	X. ±0.50

natconn®

广东纳特康电子股份有限公司

GUANGDONG NATCONN ELECTRONIC CO.,LTD

TITLE:

Pitch:2.54 Box Header Straight Type

PROJECTION	DATE	2019/7/11	CUSTOMER	N/A	CUSTOMER P/N	N/A
DATE	DRAWN	林英明	PART NO.:		DRAWING NO.:	BHA-A02
CHECKED	CHECKED	雷邦军	SIZE:	A4	UNIT:	mm
APPROVED	APPROVED	冯显东	SCALE:	2:1	SHEET:	1/1

A

B

C

D

A

B

C

D