


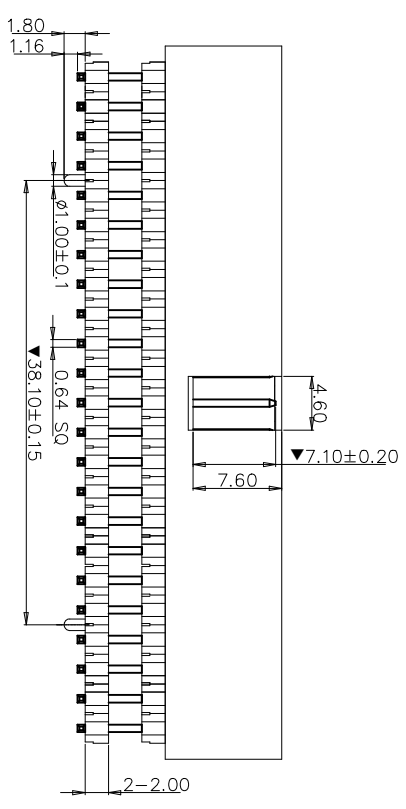


CUSTOMER COPY

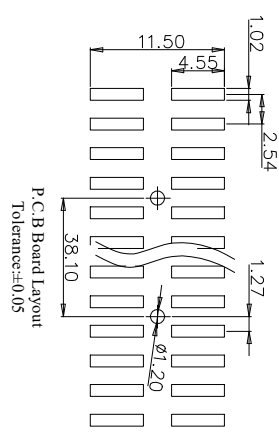

| REVISION DATA |     |             |      |          |
|---------------|-----|-------------|------|----------|
| SYM           | ECN | DESCRIPTION | DATE | APPROVED |
|               |     |             |      |          |
|               |     |             |      |          |

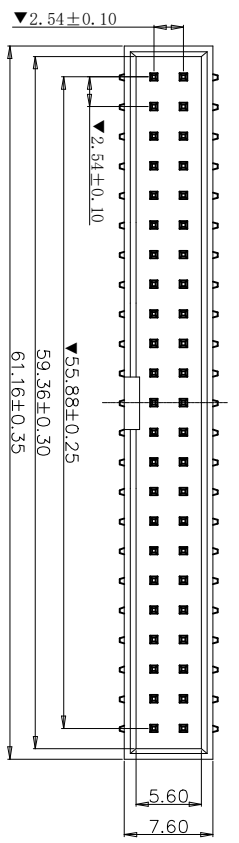

Technical Data  
 Contact: brass JIS C2700(Cuzn35)  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester UL94V-0, RoHS  
 Current rating: 3Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 500V  
 Withstanding Voltage: 550V AC/minute  
 Retention force: 0.8kgf/contact min.  
 Operating temperature: -40°C to +105°C  
 Soldering temperature: 245°C±5° 5S  
 Critical Dimensions: ▼

Ordering information

BHD - XX - X - X - B 328

No. of Positions: 08-64 (06/08/10/12/14/16/18/20/24/26/28/30/34/40/42/48/50/60/64)

Plating Option: A: G/F, B: Au3F, C: Au3P, D: Au10, H: GF/Sn120P, S: Sn120P, Z: Special (Underline option is standard)

Insulator Material Option: A: BK-FBT, B: BK-F46, C: BK-LCP, G: BK-F4BT, S: Special (Underline option is standard)

Type Option: A: Normal, B: With post, C: With CAP, D: With post & CAP

Series No. 01-999

| Packing      | TOLERANCE:  |
|--------------|-------------|
| 1. General   | ANGLE ±2°   |
| 2. Tape&Reel | X.XXX ±0.05 |
| 3. Tube      | X.XX ±0.25  |
| 4. Tray      | X.X ±0.35   |
| 5. Other     | X. ±0.50    |

**natconn**®

广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

| PROJECTION      | TITLE:                                 |
|-----------------|--|
| DATE: 2024.9.30 | Pitch: 2.54*2.54mm Box Header SMT Type |
| DRAWN: 莫雄勇      | CUSTOMER: N/A                          |
| CHECKED: 郑双平    | CUSTOMER P/N: N/A                      |
| APPROVED: 冯显东   | DRAWING NO.: BHD-B328                  |
| SIZE: A4        | UNIT: mm                               |
| SCALE: 2:1      | SHEET: 1/1                             |

A B C D 6 5 4 3 2 1