


CUSTOMER COPY




REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

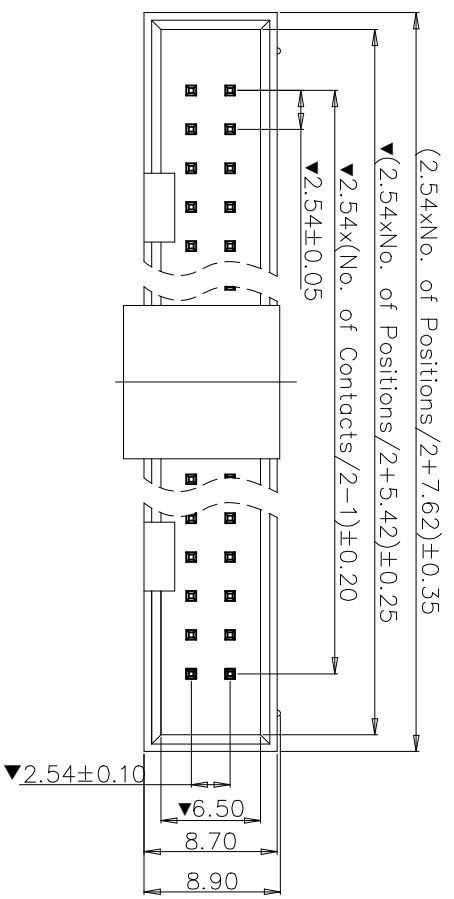

Recommended P.C.B Layout

Technical Data  
 Contact: brass JIS C2700(Cuzn35)  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester  
 Current rating: UL94V-0  
 Voltage rating: 3Amps  
 Contact resistance: 250V AC/DC  
 Withstanding Voltage: 20mΩ max.  
 Retention force: 1000mΩ min. at 100V  
 Operating temperature: 600V AC/minute  
 Soldering temperature: 1Kgf/contact min.  
 Critical Dimensions: -55°C to +105°C  
 245°C±5° 5S

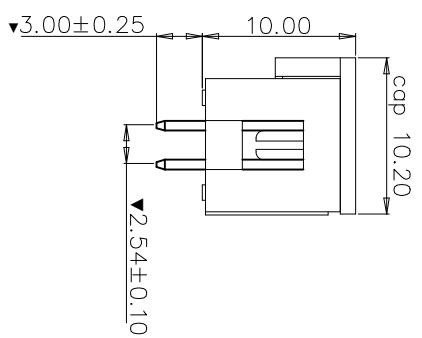

Ordering information

**BHA** - **XX** - **X** - **X** - **C** - **01**

- No. of Positions: 06-64 (06/08/10/12/14/16/18/20/24/26/28/30/34/40/48/50/60/64)
- Plating Option: A: G/F, B: Au/3", C: Au/1", D: Gr/Sn120u", H: Sn120u", Z: Special (Underline option is standard)
- Insulator Material Option: F: BK-LCP, G: BK-FABT, S: Special (Underline option is standard)
- Type Option: A: Normal, B: With post, C: With post & CAP, D: With post & CAP
- Series No.: 01-999

**natconn**® 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

Packing	TOLERANCE:	PROJECTION	TITLE:
1. General	ANGLE ±2°	DATE	2.54mm Box Header
2. Tape&Reel	X.XXX ±0.05	DRAWN	Straight Dip Type W/ Cap,A=3.0
3. Tube	X.XX ±0.25	CHECKED	CUSTOMER: N/A
4. Tray	X.X ±0.35	APPROVED	PART NO.: N/A
5. Other	X. ±0.50		CUSTOMER P/N: N/A
			DRAWING NO.: BHAXX-XXC01
			REV: A

A 6 5 4 3 2 1