

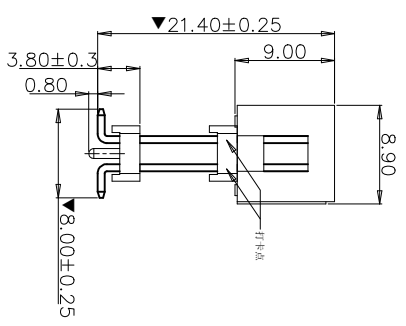
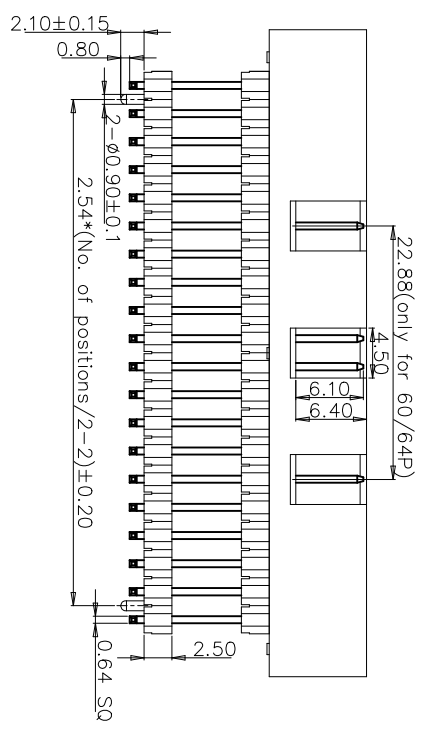


CUSTOMER COPY



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

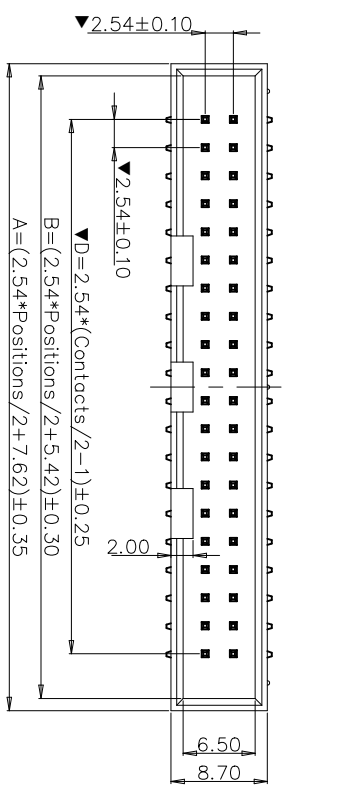

技术参数
 联系人: 黄铜JIS C2700 (CuZn35)
 接触镀层: 塑胶: PA9T 黑色 UL94V-0、RoHS
 当前额定值: 3安培
 接触电阻: 最大20m。
 绝缘电阻: 最小1000MΩ
 耐受电压: 550V交流电/分钟
 保持力: 最小1.0Kgf。
 工作温度: -40°C至+105°C
 焊接温度: 260°C+5°C 5S
 关键尺寸: ▼

Ordering information
BHD - **XX** - **X** - **X** - **B** - **330**

No. of Positions
 06-64
 (06/08/10/12/14/16/18/
 20/24/26/28/30/34/40/
 42/48/50/60/64)

Plating Option
 A G/F
 B Au3F
 C Au3F
 D Au10F
 H GF/Sn120F
 S Sn120F
 Z Special
 (Underline option is standard)

Insulator Material Option
 A BK-FBT
 B BK-F46
 F BK-LCP
 G BK-F4BT
 S Special
 (Underline option is standard)

Type Option
 A Normal
 B With post
 C With CAP
 D With post & CAP

Series No.
 01-999

natconn®

广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

Packing		TOLERANCE:		PROJECTION		TITLE:	
1.General		ANGLE	±2°	DATE	2025.4.27	Pitch:2.54*2.54mm Box Header SMT Type,W2=8.0 W/ Pin Header	
2.Tape&Reel		X,XXX	±0.05	DRAWN	莫健勇	CUSTOMER:	N/A
3.Tube	√	X,XX	±0.20	CHECKED	郑双平	CUSTOMER P/N:	N/A
4.Tray		X,X	±0.30	APPROVED	冯显东	DRAWING NO.:	BHD-B330
5.Other		X,	±0.50			SIZE:	A4
						UNIT:	mm
						SCALE:	2:1
						SHEET:	1/1