



CUSTOMER COPY


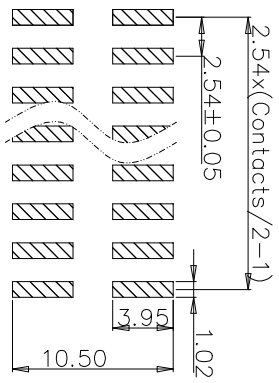


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
B		change 9.0 to 10.2	2014/08/25	张丰志

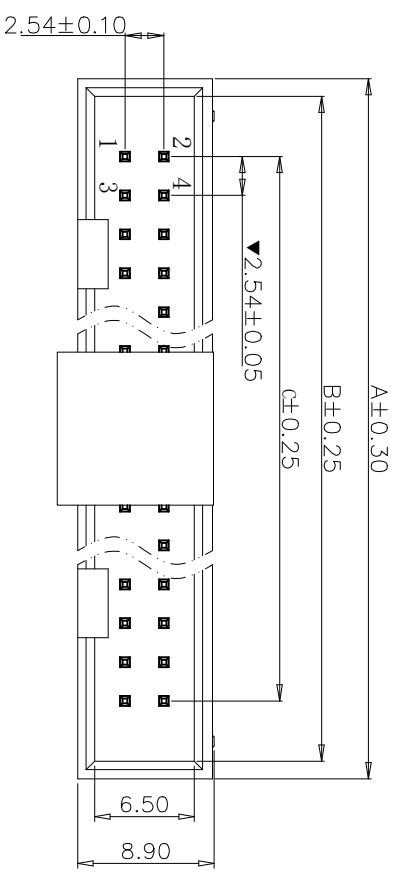

Recommended P.C.B Layout(±0.05)

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 1Kgf/contact min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5° 5S
 Critical Dimensions: ▼

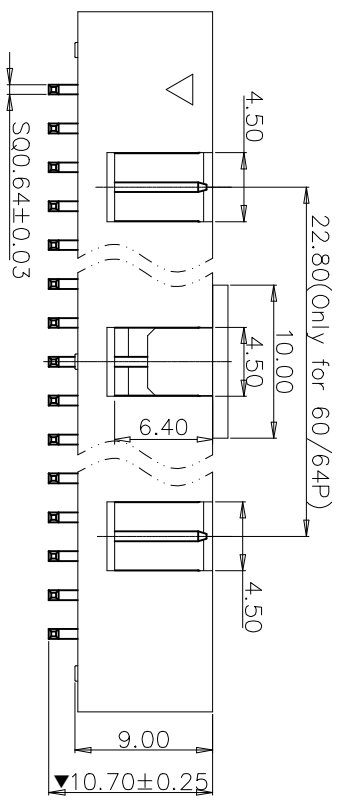

Pos.	Dem. A	Dem. B	Dem. C	Pos.	Dem. A	Dem. B	Dem. C
6P	15.24	13.04	5.08	26P	40.64	38.44	30.48
8P	17.78	15.58	7.62	30P	45.72	43.52	35.56
10P	20.32	18.12	10.16	34P	50.8	48.6	40.64
14P	25.4	23.2	15.24	40P	58.42	56.22	48.26
16P	27.94	25.74	17.78	50P	71.12	68.92	60.96
18P	30.48	28.28	20.32	60P	83.82	81.62	73.66
20P	33.02	30.82	22.86	64P	88.9	86.7	78.74
24P	38.1	35.9	27.94				

Ordering information
BHD **XX** - **X** **X** **A** **06**

No. of Positions
 08-64
 (08/09/10/12/14/16/18/
 20/24/26/28/30/34/40/
 48/50/60/64)

Plating Option
 A. G/F
 B. Au3u"
 C. Au5u"
 D. Au10u"
 S. Sn120u"
 Z. Special
 (Underline option
 is standard)

Insulator Material
 Option
 F. BK-LCP
 G. BK-PAET
 S. Special
 (Underline option
 is standard)

Series No.
 01-999

natconn® 广东纳特康电子股份有限公司
 GUANGONG NATCONN ELECTRONIC CO.,LTD

Packing		TOLERANCE: ANGLE ±2°		PROJECTION		TITLE:	
1. General	√	X.XXX	±0.05	DATE	2014/08/25	Pitch: 2.54*2.54mm Box Header	
2. Tape&Reel	√	X.XXX	±0.20	DRAWN	邹丽婷	SMT Type, W/Cap, W2=9.5mm	
3. Tube	√	X.X	±0.30	CHECKED	于松	CUSTOMER:	N/A
4. Tray	√	X.X	±0.50	APPROVED	张丰志	PART NO.:	N/A
5. Other	X					SIZE:	A4
						UNIT:	mm
						SCALE:	1:1
						SHEET:	1/1

