





CUSTOMER COPY

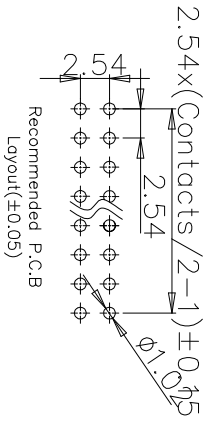

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

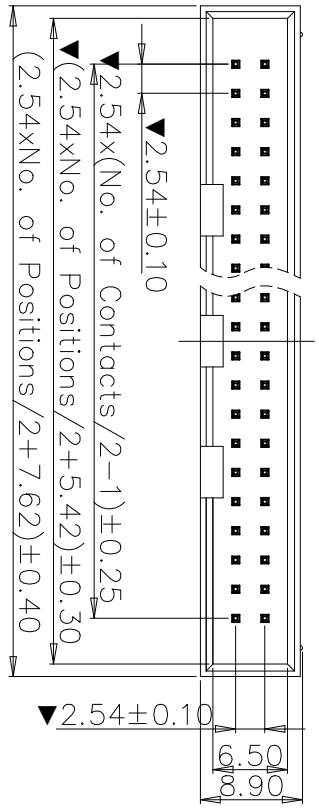

Technical Data  
 Contact: brass JIS C2800(Cuzn40)  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester  
 UL94V-0  
 Current rating: 3Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 550V AC/minute  
 Retention force: 0.8Kgf/contact min.  
 Operating temperature: -55°C to +105°C  
 Soldering temperature: 245°C±5° 5S  
 Critical Dimensions: ▼

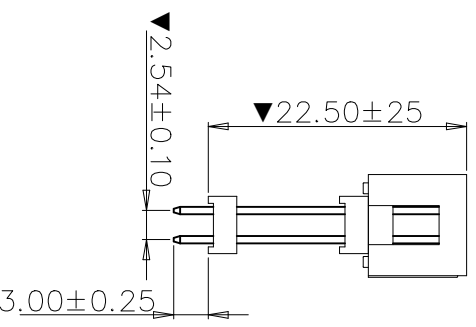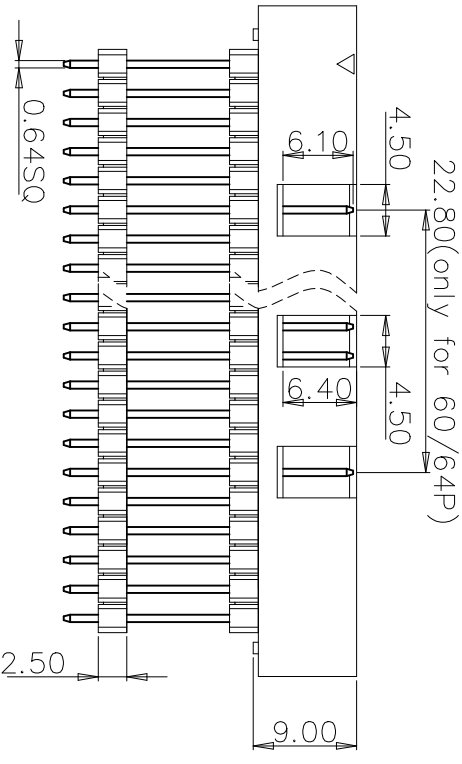

Ordering information

BHA XX - X X A 138

No. of Positions  
 06-64  
 (06/06/10/12/14/16/18/  
 20/24/28/30/34/40/  
 48/49/50/60/64)

Plating Option  
 A GF  
 B Au3u"  
 C Au5u"  
 D Au10u"  
 H GF/Sn120u"  
 S Sn120u"  
 Z Special  
 (Underline option is standard)

Insulator Material Option  
 A BK/PBT  
 F BK/CLP  
 G BK-PA6T  
 S Special  
 (Underline option is standard)

Series No.  
 01-999

Packing		TOLERANCE:		PROJECTION		TITLE:			
1. General	√	ANGLE	±2°	DATE	2019/04/09	2.54mm Box Header Straight Dip Type, With Pin Headers			
2. Tape&Reel		X.XXX	±0.05	DRAWN	张伟	CUSTOMER:	N/A	CUSTOMER P/N:	N/A
3. Tube		X.XX	±0.25	CHECKED	唐建平	PART NO.:	N/A	DRAWING NO.:	BHAXX-XXA138
4. Tray	√	X.X	±0.35	APPROVED	冯显东	SIZE:	A4	UNIT:	mm
5. Other		X.	±0.50			SCALE:	1:1	SHEET:	1/1

**natconn**®

广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

A

B

C

D

A

B

C

D

6

5

4

3

2

1

5

4

3

2

1