



CUSTOMER COPY


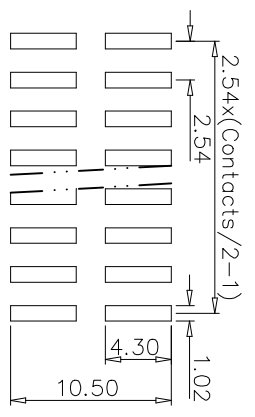


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

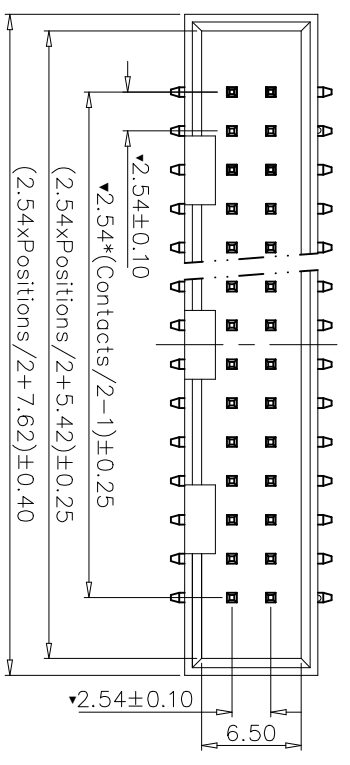

Recommended PCB Board Layout(±0.05)

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5° 5S
 Critical Dimensions: ▼

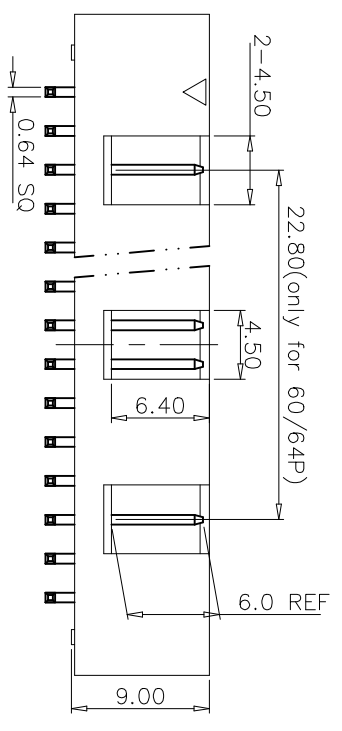

Ordering information

BHD **XX** - **X** **X** **A** **01**

No. of Positions: 04-64

Plating Option:
 A: GFE
 B: Au31μ"
 C: Au51μ"
 D: Au10μ"
 S: Sn120μ"
 Z: Special (Underline option is standard)

Insulator Material Option:
 F: BK-LCP
 G: BK-PA9T
 S: Special (Underline option is standard)

Series No. 01-999

Packing	
1. General	
2. Tape&Reel	
3. Tube	
4. Tray	✓
5. Other	

natconn® 广东纳特康电子股份有限公司
 GUANGONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°	PROJECTION:	TITLE: 2.54Pitch Box Header SMT Type,W2=9.5mm
DATE: 2011/04/20	DRAWN: 王伟超	CUSTOMER P/N: N/A
CHECKED: 唐建平	APPROVED: 冯显东	DRAWING NO.: BHDXX-XXA01
CUSTOMER: N/A	SIZE: A4	UNIT: mm
SCALE: 1:1	SHEET: 1/1	

6 5 4 3 2 1