CUSTOMER COPY

RoHS compliant

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A1		Update drawing	2013/10/16	张丰志
A2		Update drawing	2013/12/19	张丰志

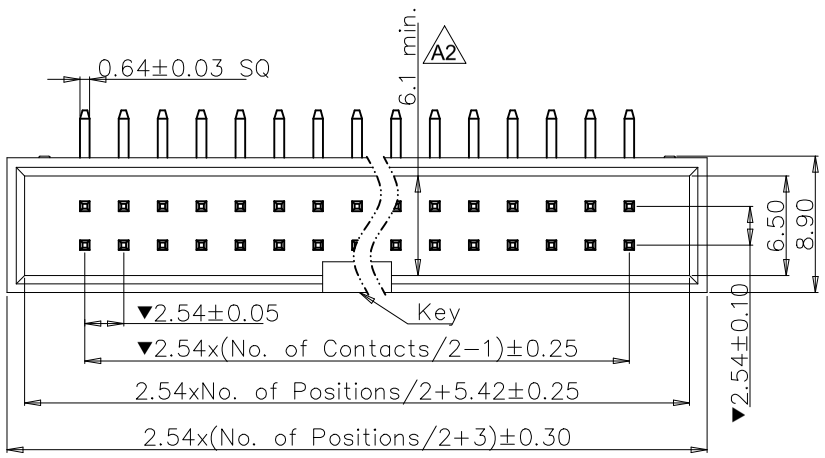

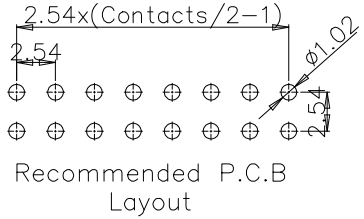

Recommended P.C.B Layout

Technical Data

Contact:	brass
Contact plating:	gold plated over nickel plated
Insulator:	black PBT+30%G.F,UL94V-0
Current rating:	3Amps
Contact resistance:	20mΩ max.
Insulation resistance:	1000MΩ min. at 100V
Withstanding Voltage:	600V AC/minute
Retention force:	0.8Kgf/contact min.
Operaing temperature:	-55°C to+105°C(Sn plated) -55°C to+125°C(Au plated)
Soldering temperature:	245°C±5° 5S
Critical Dimensions:▼	

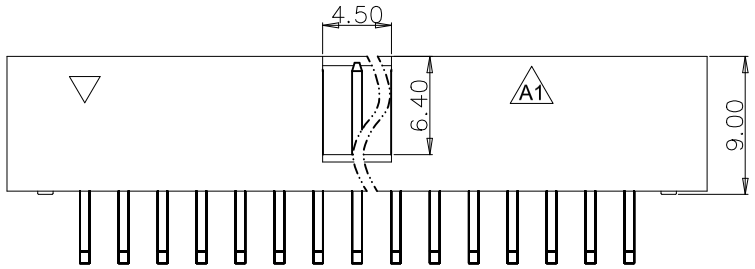

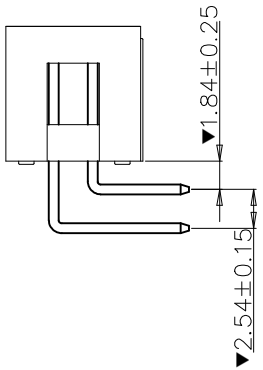

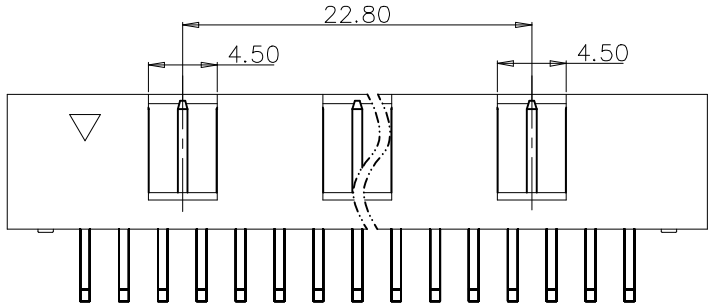

60 & 64P 3keys A1

Ordering information

BHB	XX	-	X	X	A	01

No. of Positions	Plating Option	Insulator Material Option	Type Option	Series No.
06~64 (06/08/10/12/14/16/18/20/24/26/28/30/34/40/48/50/60/64/)	A G/F B Au3μ" C Au5μ" D Au10μ" H GF/Sn120μ" S Sn120μ" Z Special (Underline option is standard)	A BK-PBT F BK-LCP G BK-PA9T S Special (Underline option is standard)	A Normal B With post C With CAP D With post & CAP	01~999

Packing	
1.General	
2.Tape&Reel	
3.Tube	
4.Tray	√
5.Other	

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION		TITLE: Pitch2.54 Box Header R/A Type			
ANGLE ±2°	DATE	2010/01/25				
X.XXX ±0.05	DRAWN	张丰志	CUSTOMER: N/A	CUSTOMER P/N: N/A		REV: N/A
X.XX ±0.20	CHECKED		PART NO.:	DRAWING NO.: NP-BHBXX-AAA01		REV: A2
X.X ±0.30	APPROVED		SIZE: A4	UNIT: mm	SCALE: 2:1	SHEET: 1/1
X. ±0.50						