
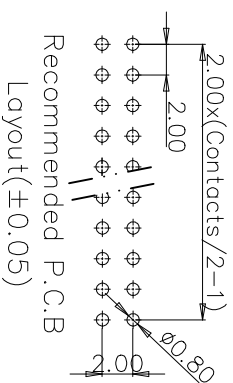


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
B		更新实心耳扣和主体	29/05/12	
C		上针长标准化	2013/01/25	Sullen


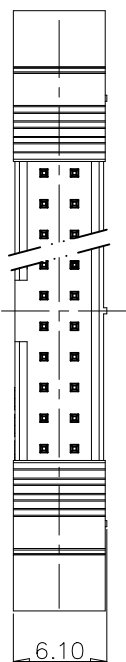


Technical Data  
 Contact:  
 Contact plating:  
 Insulator:

brass JIS C2800(Cuzn40)  
 see ordering information  
 black glass filled polyester  
 UL94V-0

Current rating:  
 Contact resistance:  
 Insulation resistance:  
 Withstanding Voltage:  
 Retention force:  
 Operating temperature:  
 Soldering temperature:  
 Critical Dimensions: ▼

1.5Amps  
 20mΩ max.  
 1000MΩ min. at 100V  
 450V AC/minute  
 0.6kgf/contact min.  
 -55°C to +105°C  
 245°C±5° 5S

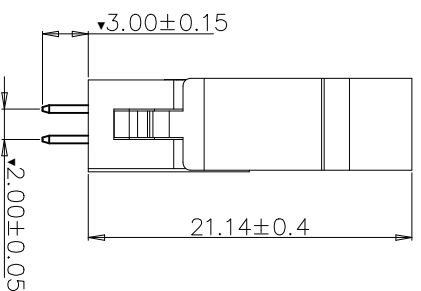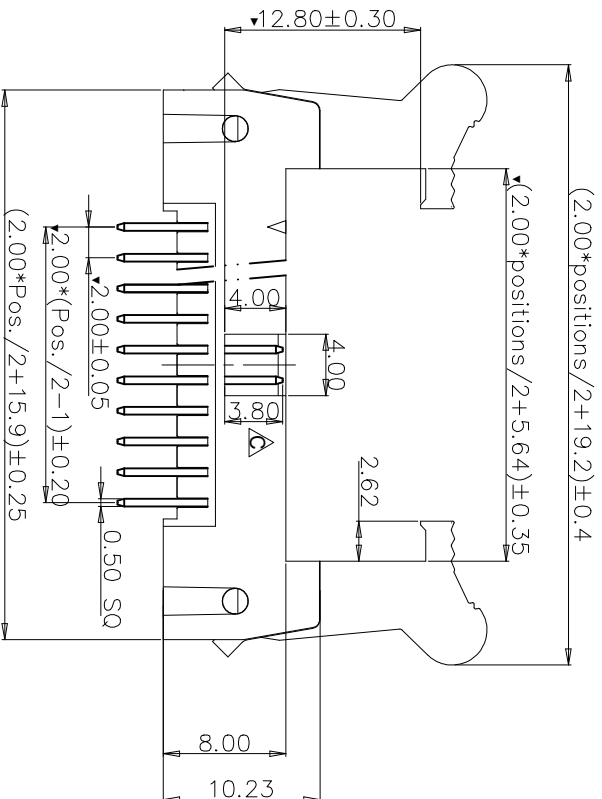

Ordering information

BLFA  -

No. of Positions  
10-50P

Plating Option  
 A Au  
 B Au10u"  
 C Au50u"  
 D Au10u"  
 H GR/Sn120u"  
 S Sn120u"  
 Z Special  
 (Underline option is standard)

Insulator Material Option  
 A BK-PBT  
 F BK-LCP  
 G BK-PBT  
 S Special  
 (Underline option is standard)

Series No.  
01-999

Packing		TOLERANCE:		PROJECTION		TITLE:	
1. General		ANGLE	±2°	DATE	2017/04/01	Pitch: 2.00*2.00mm Box Header With Latches Straight Dip Type Long Ejector, DIP=3.0	
2. Tape&Reel			±0.05	DRAWN	雷邦军	CUSTOMER:	N/A
3. Tube			±0.15	CHECKED		PART NO.:	DRAWING NO.:
4. Tray	√		±0.25	APPROVED		BLFAXX-XXA08	REV.:
5. Other	X.		±0.50			SCALE:	1:1
						SIZE:	A4
						UNIT:	mm
						SHEET:	1/1

**natconn**® 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

A

B

C

D

6

6

5

5

4

4

3

3

2

2

1

1