

CUSTOMER COPY







REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
B		科华专用	2021.07.29	

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0

Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 1kgf/contact min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5 5S
 Critical Dimensions: ▼

备注:
 三个方形槽只适用于60P和64P

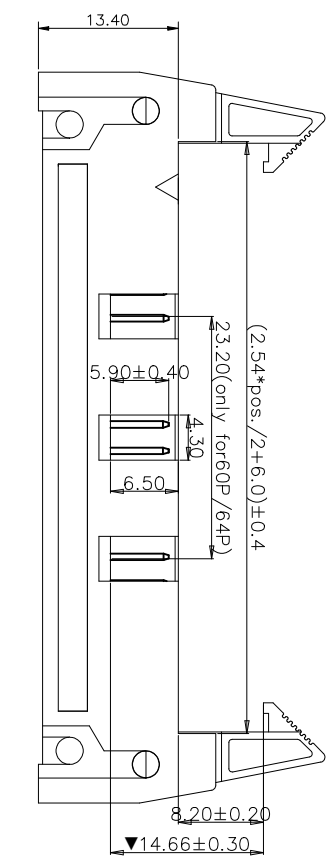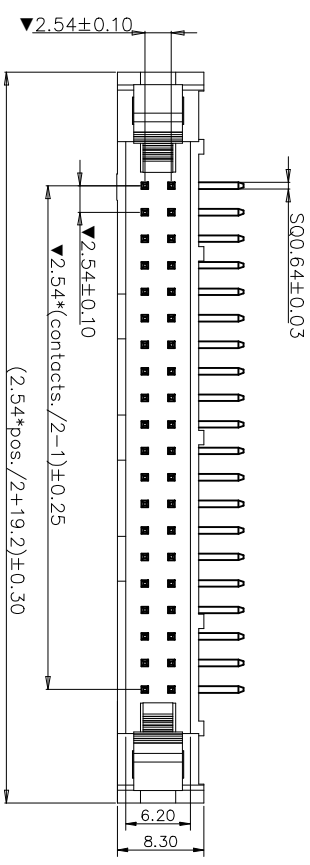

BLHB XX - X X B 01

No. of Positions
 10-64
 See note 5

Plating Option
 A Au5μ"
 C Au10μ"
 D Au10μ"
 F Au 30μ"
 H GF/Sn120μ"
 S Sn120μ"
 Z Special

Insulator Material Option
 A BK-PBT
 F BK-LCP
 G BK-PA9T
 S Special

Serial No.
 01-99

Packing	
1. General	
2. Tape&Reel	
3. Tube	
4. Tray	√
5. Other	X.

natconn ® 广东纳特康电子股份有限公司		GUANGDONG NATCONN ELECTRONIC CO.,LTD	
TOLERANCE: ANGLE ±2°		TITLE: 2.54mm Box Header Right Angle Dip Type	
DATE	2014/08/08	CUSTOMER P/N:	N/A
DRAWN	邹丽婷	DRAWING NO.:	BLHBXX-XXB01
CHECKED	于松	SCALE:	1:1
APPROVED	张丰志	SHEET:	1/1