



CUSTOMER COPY


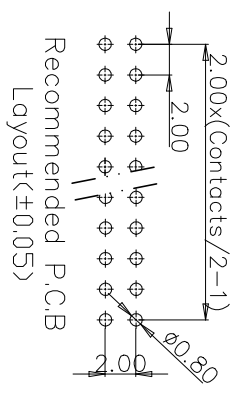


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

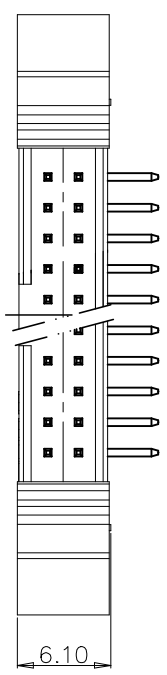

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0

Current rating: 1.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Retention force: 0.6Kgf/contact min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

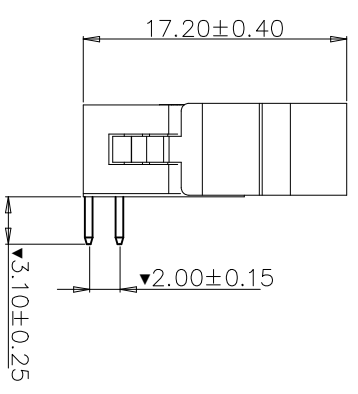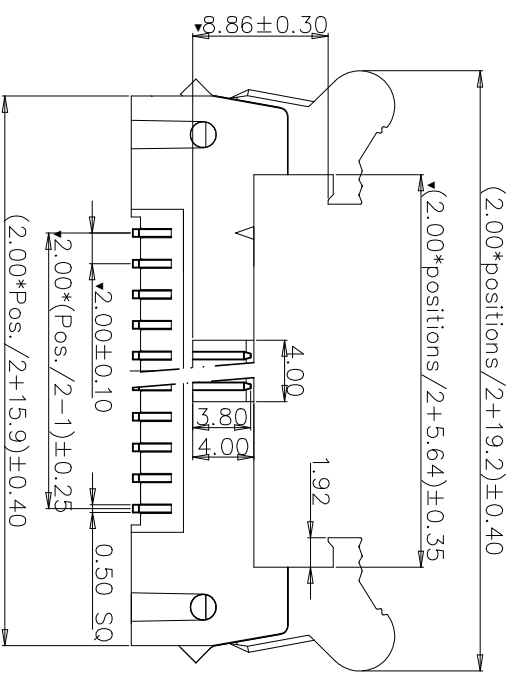

Ordering information

BLFB XX - 2 X X A 01

No. of Positions: 10-50P

Plating Option:
 A Au/12μ"
 B Ni/12μ"
 C Au/10μ"
 D Au/10μ"
 H GF/Sn120μ"
 S Sn120μ"
 Z Special (Underline option is standard)

Insulator Material Option:
 A BK-PBT
 F BK-LCP
 G BK-PA6T
 S Special (Underline option is standard)

Series No. 01-999

Packing		TOLERANCE: ±2°		TITLE: Pitch: 2.00*2.00mm Box Header With Latches	
1. General		ANGLE	±2°	DATE	2014/06/09
2. Tape&Reel		X.XXX	±0.05	DRAWN	江国注
3. Tube		X.XX	±0.25	CHECKED	雷邦军
4. Tray	✓	X.X	±0.35	APPROVED	冯显东
5. Other	X.	±0.50		SIZE: A4	UNIT: mm

natconn® 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

PART NO.: R/A Type Short Ejector.DIP=3.1
 CUSTOMER P/N: N/A
 DRAWING NO.: BLFBXX-2XXXA01
 REV: N/A

6 5 4 3 2 1