CUSTOMER COPY

RoHS compliant

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

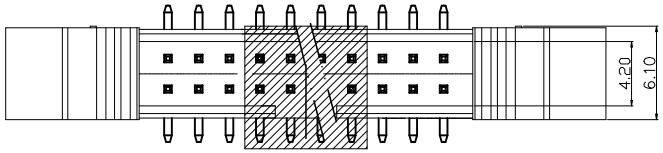



Recommended P.C.B Layout(±0.05)

Technical Data

Contact:	brass JIS C2700(Cuzn35)
Contact plating:	see ordering information
Insulator:	black glass filled polyester UL94V-0
Current rating:	1.5Amps
Contact resistance:	20mΩ max.
Insulation resistance:	1000MΩ min. at 100V
Withstanding Voltage:	450V AC/minute
Retention force:	0.6Kgf/contact min.
Operaing temperature:	-55℃ to+105℃
Soldering temperature:	260℃±5° 5S
Critical Dimensions: ▼	

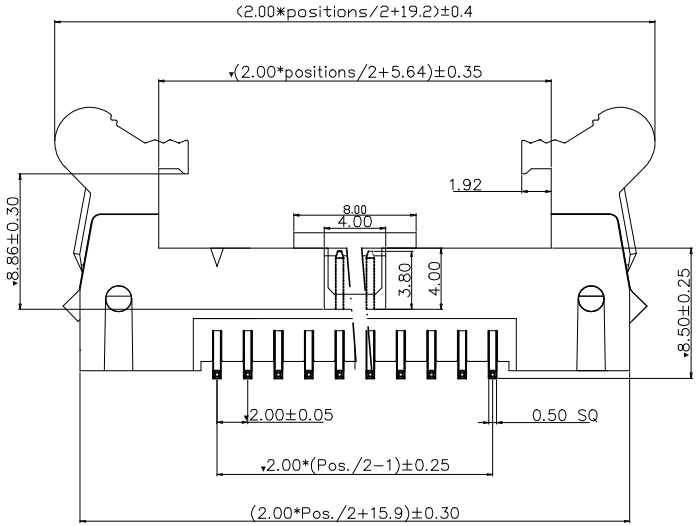



Ordering information

BLFD	XX	- 2	X	X	C	18
	No. of Positions 10~50P		Plating Option A G/F, B Au3μ", C Au5μ", D Au10μ", H GF/Sn120μ", S Sn120μ", Z Special (Underline option is standard)	Insulator Material Option F BK-LCP, G BK-PA9T, S Special (Underline option is standard)		Series No. 01~999

Packing	
1.General	
2.Tape&Reel	
3.Tube	
4.Tray	√
5.Other	

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTI0N		TITLE: Pitch: 2.00*2.00mm Box Header With Latches SMT Type Short Ejector		
ANGLE ±2°	DATE	2020/06/09			
X.XXX ±0.05	DRAWN	MO	CUSTOMER: N/A	CUSTOMER P/N: N/A	REV: N/A
X.XX ±0.20	CHECKED		PART NO.:	DRAWING NO.: BLFD-C18	REV: A
X.X ±0.30	APPROVED		SIZE: A4 / UNIT: mm	SCALE: 2:1	SHEET: 1/1
X. ±0.50					