




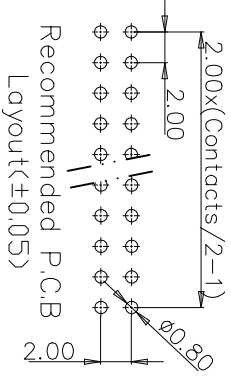


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

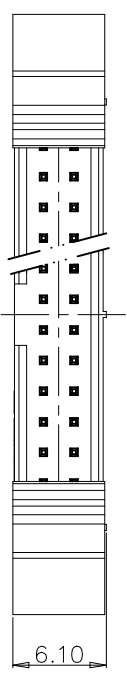

Technical Data
 Contact: brass J1S C2800(Cuzn40)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0

Current rating: 1.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Retention force: 0.6kgf/contact min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

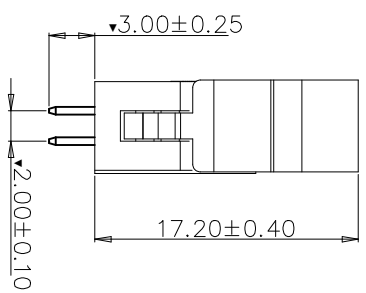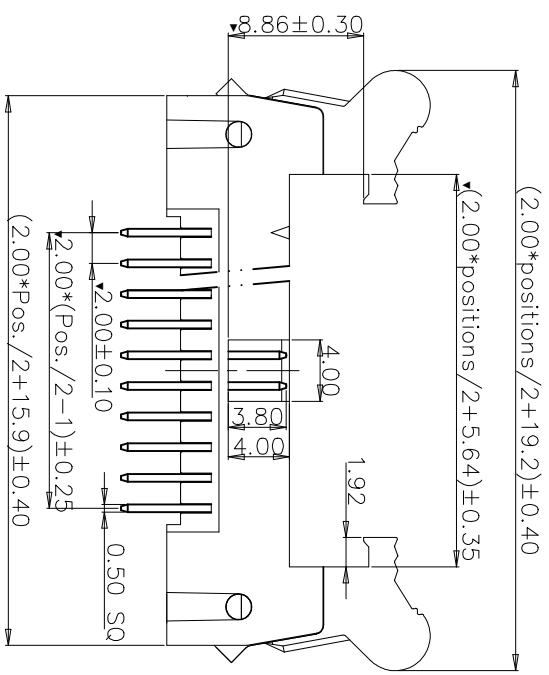

Ordering information

BLFA XX - 2 X X B 01

No. of Positions: 10-50P

Plating Option: A G/F, B Ausp, C Ausp, D Au/Op, E Sn, F Sn/20P, Z Special (Underline option is standard)

Insulator Material Option: A BK-FBT, B BK-LCP, C BK-PAI, D BK-PAI, E BK-PAI, Z Special (Underline option is standard)

Series No.: 01-999

Packing	
1. General	
2. Tape & Reel	
3. Tube	
4. Tray	✓
5. Other	X

natconn® 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°

PROJECTION	DATE	DRAWN	CHECKED	APPROVED
	2014/06/09	江国注	雷邦军	冯显东

TITLE: Pitch: 2.00*2.00mm Box Header
 Straight Dip Type Short With Latches
 Facet Dip = 3.0
 CUSTOMER: N/A
 PART NO.: N/A
 DRAWING NO.: BLFAXX-2XXB01
 SCALE: 1:1
 SHEET: 1/1