

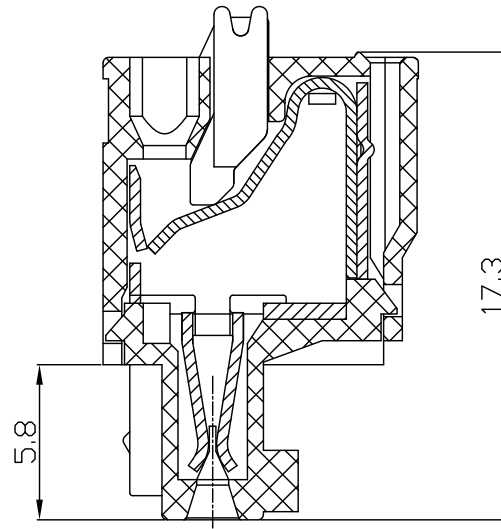


CUSTOMER COPY

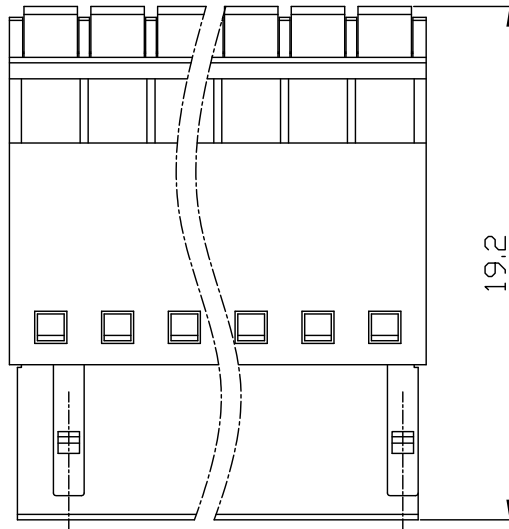

| REVISION DATA | | | | |
|---------------|-----|-------------|------|----------|
| SYM | ECN | DESCRIPTION | DATE | APPROVED |
| | | | | |
| | | | | |

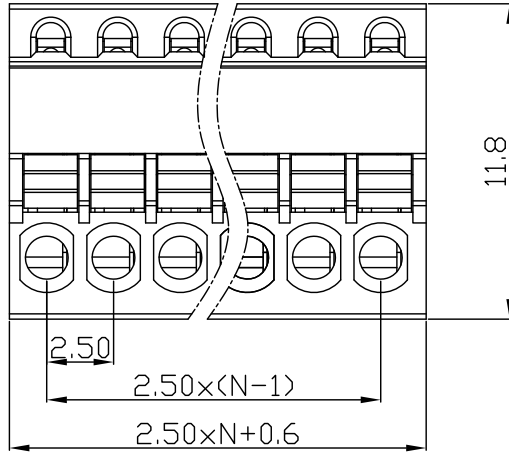

Technical Data

1. Material:

Insulator: NY66, UL94V-0 RoHS

Wire guard: stainless steel

Contact clamp: phosphor bronze, nickel plated

2. Electrical:

Current rating: 4A

Voltage rating: 150V

Contact resistance: $\leq 20\text{m}\Omega$

Insulation resistance: $\geq 5000\text{M}\Omega$

Withstanding Voltage: 1300V AC/minute

3. Mechanical:

Wire range: 28~20AWG

Wire strip length: 7~8mm

Operating temperature: -40°C to +105°C

Ordering information

| | | | | | | | |
|--------------------|----|-------|------------|-----------|------|------------|----|
| PWA | XX | 2 | 0 | X | 0 | X | 00 |
| Number of contacts | | Pitch | Boby Color | Boby type | Mark | Serial No. | |

02~24
(Solid block)

2 2.5/.098"

0 Black
3 Orange
5 Green
6 Blue
8 Grey
(Underline is standard)

0 Without flange

0 No mark
1 natconn
2 Customer
3 Others

00 Standard
01~99 Any special item by customer request

natconn® 深圳市纳特康电子有限公司
SHENZHEN NATCONN ELECTRONIC CO.,LTD

| | | | | | |
|---------------------|------------|------------|--------------------|---------------|--------|
| TOLERANCE: | PROJECTION | | TITLE: | | |
| ANGLE $\pm 2^\circ$ | DATE | 2011/11/05 | PWA Terminal Block | | |
| X.XXX ± 0.01 | DRAWN | Sullen | CUSTOMER: | CUSTOMER P/N: | REV: |
| X.XX ± 0.25 | CHECKED | | N/A | N/A | N/A |
| X.X ± 0.35 | APPROVED | | PART NO.: | DRAWING NO.: | REV: |
| X. ± 0.50 | | | | PWAXX20X0X00 | A |
| | | | SIZE: | UNIT: | SCALE: |
| | | | A4 | mm | 4:1 |
| | | | | | SHEET: |
| | | | | | 1/1 |