

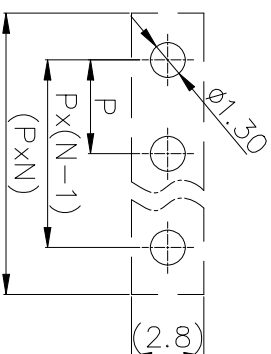
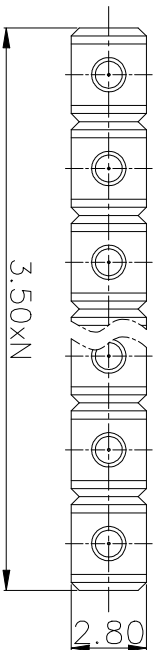


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

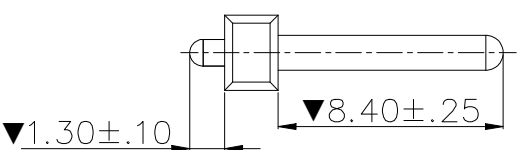

Recommended P.C.B. Layout

- 技术参数**
1. 材料:
绝缘体: NY9T, UL94V-0 RoHS
焊料: 黄铜, 镀锡
2. 电气:
额定电流: 10A
额定电压: 300V
接触电阻: $\leq 20m\Omega$
绝缘电阻: $\geq 5000M\Omega$
耐受电压: 1600V AC/分钟
3. 机械:
工作温度: $-40^{\circ}C$ 至 $+105^{\circ}C$
焊接温度: $260^{\circ}C \pm 5^{\circ}C / 5S$
4. 关键尺寸: ▼

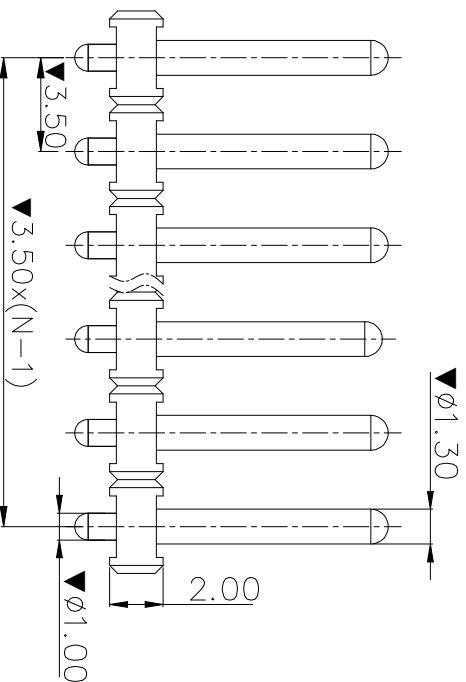

Ordering information

PHC	XX	4	Z	X	X	X	89
Number of contacts		Pitch	Pin length	Pin plating	Body material	Mark	Serial No.

02~24(pitch3.5)	4 3.5/.138"	see pin length option	0 Tin 1 Gold 10u" 2 Gold flash 3 Gold others (Underline is standard)	0 BA9T (Underline is standard)	0 No mark 1 notconn 2 Customer 3 Others	00 Standard 01~99 Any special item by customer request
-----------------	-------------	-----------------------	---	--------------------------------	--	---

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD.

TOLERANCE:	PROJECTION	TITLE:	PHC(3.50) Terminal Block
ANGLE $\pm 2^{\circ}$	DATE: 2025.3.11	CUSTOMER:	N/A
X.XXX ± 0.01	DRAWN: 郑双平	CUSTOMER P/N:	N/A
X.XX ± 0.25	CHECKED:	PART NO.:	PHCXX4ZXXXX89
X.X ± 0.35	APPROVED:	SCALE:	1:1
X. ± 0.50		SIZE: A4	UNIT: mm
		SCALE:	1:1
		SHEET:	1/1