



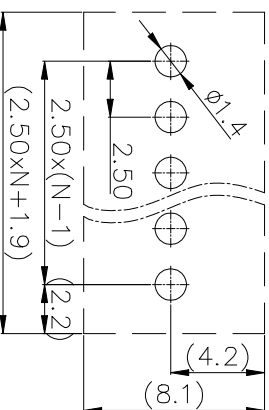




REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

1. Material:
Insulator: NY66, UL94V-0 RoHS
Solder pin: brass, tin plated
2. Electrical:
Current rating: 4A
Voltage rating: 150V
Contact resistance: $\leq 20m\Omega$
Insulation resistance: $\geq 5000M\Omega$
Withstanding Voltage: 1300V AC/minute
3. Mechanical:
Operating temperature: -40°C to +105°C
Soldering temperature: 245°C \pm 10°C/5S
4. Critical Dimensions: ▼

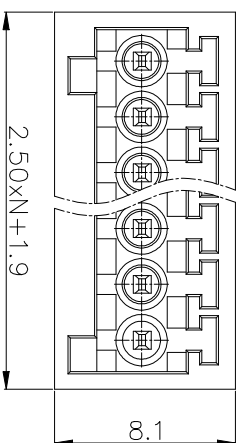

Recommended P.C.B Layout

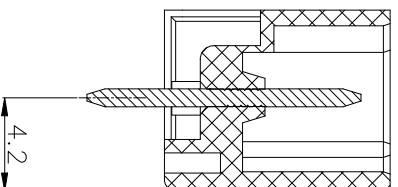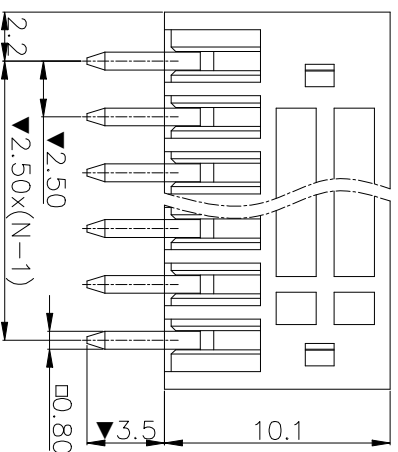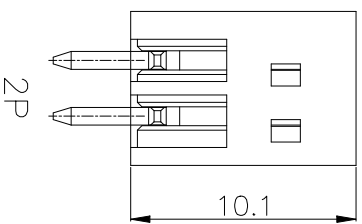

Ordering information

PNA XX	2	1	X	1	X	00
Number of contacts	Pitch	Color	P.C.B mounting	Mark	Serial No.	
02~24 (Solid block)	2 2.5/.098"	0 Black 3 Orange 5 Green 6 Blue 8 Grey (Underline is standard)	1 Vertical	0 No mark 1 notconn 2 Customer 3 Others	00 Standard 01~99 Any special item by customer request	

natconn®

广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE $\pm 2^\circ$ X.XXX ± 0.01 X.XX ± 0.25 X.X ± 0.35 X. ± 0.50	PROJECTION	TITLE: PNA Terminal Block, Vertical Type
DATE: 2011/11/05	DRAWN: 唐建平	CUSTOMER: N/A
CHECKED: 雷邦军	APPROVED: 冯显东	PART NO.: N/A
		DRAWING NO.: PNA XX21X1X100
		SIZE: A4
		UNIT: mm
		SCALE: 1:1
		SHEET: 1/1