






REVISION DATA

| SYM | ECN | DESCRIPTION | DATE | APPROVED |
|-----|-----|-------------|------|----------|
| | | | | |
| | | | | |

Technical Data

1. Material:
 - 1.1 Insulator: PA66, UL94V-0 RoHS
 - 1.2 Terminal: Brass, Tin plated
2. Electrical:
 - 2.1 Current rating: 10Amps/contact max.
 - 2.2 Voltage rating: 300V/contact AC
 - 2.3 Insulation resistance: $\geq 5000M\Omega$ at V=100V
 - 2.4 Dielectric strength: 1500V_{rms} min.
3. Mechanical:
 - 3.1 Operating temperature: -40°C to +105°C
 - 3.2 Soldering temperature: 250°C 5s
4. Critical Dimensions: ▼

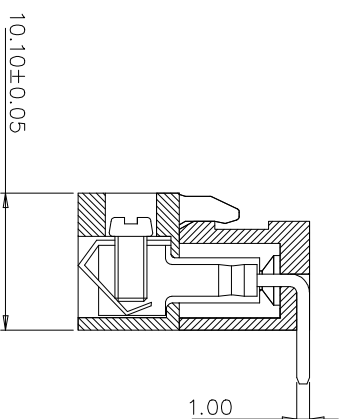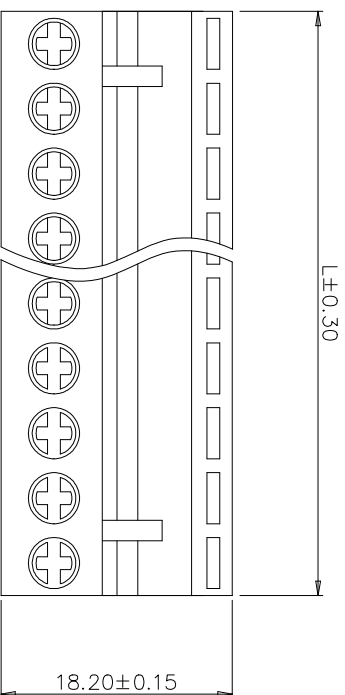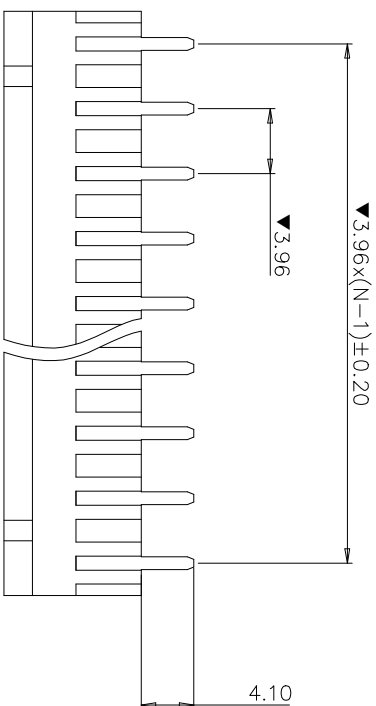

Ordering information

PIG 03 Q X X 0 X 01

Number of contacts:
02~24(pitch 5.0/5.08)
02~12(pitch 10.0/10.16) (Solid block)

Pitch: 0 3.96/.197"

Screw&Clamp:
0 " " / " combination type W/Bross Machined Clamp
1 " " Slot type W/Bross Machined Clamp

Color:
0 Black
5 Green
6 Blue
8 Grey

Body Type:
0 Without flange

Mark:
0 No mark
1 natconn
2 Customer
3 Others

Serial No:
00 Standard

Packing

| | |
|--------------|---|
| 1. General | ✓ |
| 2. Tape&Reel | |
| 3. Tube | |
| 4. Tray | |
| 5. Other | |

natconn®

广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD.

TOLERANCE: ANGLE ±2°

| | |
|----------|-------------|
| 3. Tube | X.XXX ±0.01 |
| 4. Tray | X.XX ±0.25 |
| 5. Other | X.X ±0.35 |
| | X. ±0.50 |

PROJECTION

DATE: 2014/11/25

DRAWN: 唐建平

CHECKED

APPROVED

TITLE:

PJG+PJN\3.96 Terminal Block

CUSTOMER: N/A

PARTNO.:

SIZE: A4

CUSTOMER P/N: N/A

DRAWING NO.: PJG03QXX0X01

UNIT: mm

REV: N/A

REV: A

SCALE: 1:1

SHEET: 1/1