

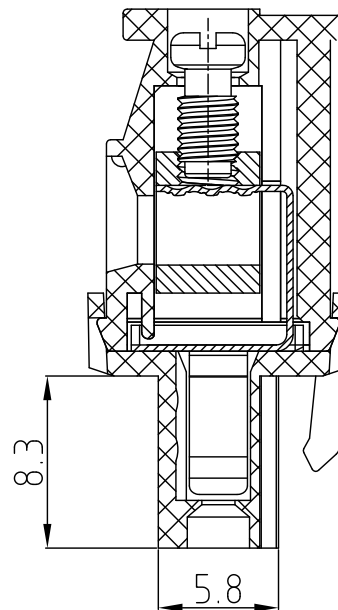


CUSTOMER COPY

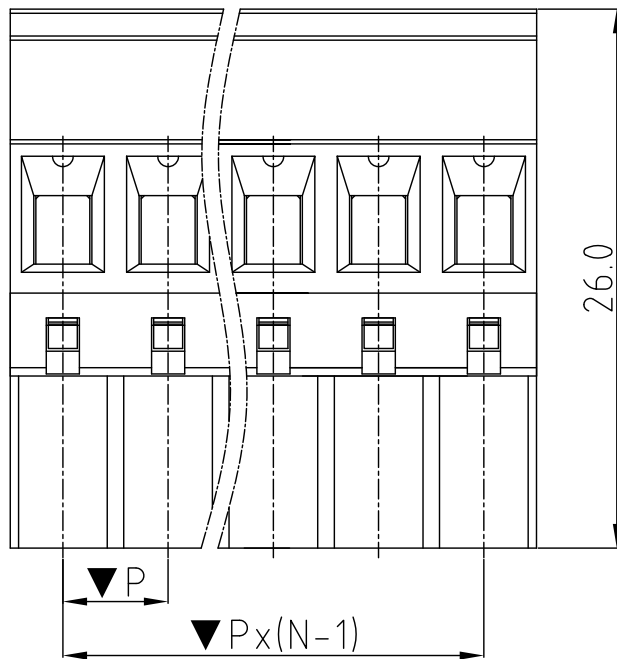

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

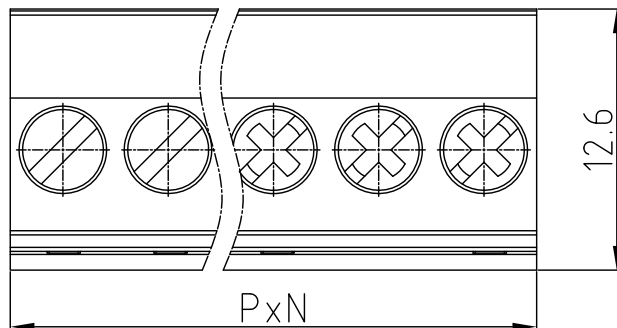

Technical Data

- Material:
  - Insulator: NY66, UL94V-0 RoHS
  - Contact clamp: phosphor bronze, nickel plated
  - Cage clamp: brass (CuZn), nickel plated
  - Screw: steel M3, galvanized plated
- Electrical:
  - Current rating: 15A
  - Voltage rating: 300V
  - Contact resistance:  $\leq 20m\Omega$
  - Insulation resistance:  $\geq 5000M\Omega$
  - Withstanding Voltage: 1600V AC/minute
- Mechanical:
  - Wire range: 24~12AWG
  - Screw torque: 3.5Lb-in
  - Wire strip length: 7-8mm
  - Operating temperature: -40°C to +105°C
  - Safely approval: us, file No.: E355923
  - Critical Dimensions: ▼

Ordering information

PLC	XX	X	X	X	B	X	00
Number of contacts		Pitch	Screw & Clamp	Color	Body type	Mark	Serial No.
02~24 (pitch 5.0/5.08) 02~12 (pitch 10.0/10.16) (Solid block)	6 5.0/.197" 7 5.08/.20" H 10.0/.394" I 10.16/.40"	0 "-" / "+" Combination type w/ brass machined clamp 1 "-" Slot type w/ brass machined clamp	0 Black 3 Orange 5 Green 6 Blue 8 Grey (Underline is standard)	B Hook on back side (A is standard)	0 No mark 1 natconn 2 Customer 3 Others	00 Standard 01~99 Any special item by customer request	

**natconn**® 广东纳特康电子股份有限公司  
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE: PLC Terminal Block, B Type		
ANGLE $\pm 2^\circ$	DATE	2011/11/05		
X.XXX $\pm 0.01$	DRAWN	Sullen	CUSTOMER: N/A	CUSTOMER P/N: N/A
X.XX $\pm 0.25$	CHECKED	唐建平	PART NO.:	DRAWING NO.: PLCXXXXXB00
X.X $\pm 0.35$	APPROVED	冯显东	SIZE: A4	UNIT: mm
X. $\pm 0.50$			SCALE: 1:1	SHEET: 1/1