
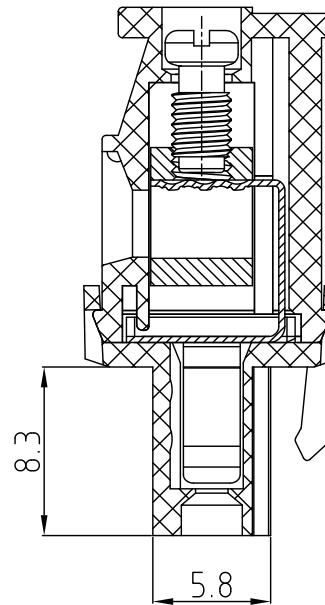
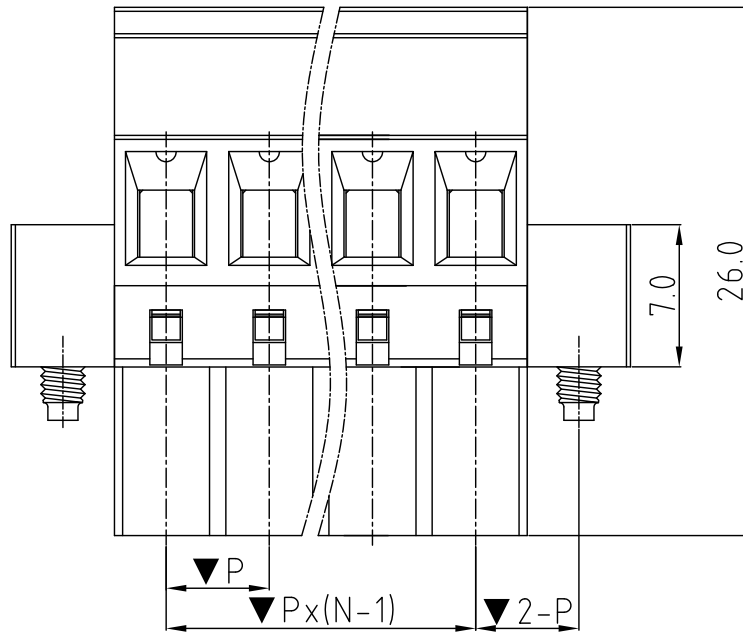


CUSTOMER COPY

RoHS compliant

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

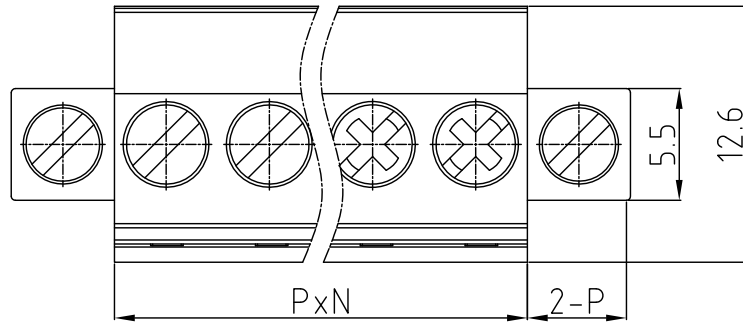

Technical Data

1. Material:

Insulator: NY66, UL94V-0 RoHS
 Contact clamp: phosphor bronze, nickel plated
 Cage clamp: brass (CuZn), nickel plated
 Screw: steel M3, galvanized plated

2. Electrical:

Current rating: 15A
 Voltage rating: 300V
 Contact resistance: $\leq 20\text{m}\Omega$
 Insulation resistance: $\geq 5000\text{M}\Omega$
 Withstanding Voltage: 1600V AC/minute

3. Mechanical:

Wire range: 26~16AWG
 Screw torque: 3.5Lb-in
 Wire strip length: 7~8mm
 Operating temperature: -40°C to +105°C

Safely approval: us, file No.: E355923
 Critical Dimensions: ▼

Ordering information

PLD	XX	X	X	X	B	X	00
Number of contacts		Pitch	Screw & Clamp	Color	Body type	Mark	Serial No.
02~24 (pitch 5.08) 02~12 (pitch 10.0/10.16) (Solid block)	6 5.0/.197" 7 5.08/.20" H 10.0/.394" I 10.16/.40"	0 "-" / "+" Combination type w/ brass machined clamp 1 "-" Slot type w/ brass machined clamp	0 Black 3 Orange 5 Green 6 Blue 8 Grey (Underline is standard)	B Hook on back side (A is standard)	0 No mark 1 natconn 2 Customer 3 Others	00 Standard 01~99 Any special item by customer request	

natconn® 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO., LTD

TOLERANCE:	PROJECTION	TITLE:	PLD Terminal Block, B Type		
ANGLE $\pm 2^\circ$	DATE	2011/11/05			
X.XXX ± 0.01	DRAWN	Sullen	CUSTOMER:	N/A	CUSTOMER P/N:
X.XX ± 0.25	CHECKED	唐建平	PART NO.:		CUSTOMER P/N:
X.X ± 0.35	APPROVED	冯显东	DRAWING NO.:	PLDXXXXXB00	REV:
X. ± 0.50			SIZE:	A4	UNIT:
			SCALE:	1:1	SHEET:
					1/1