
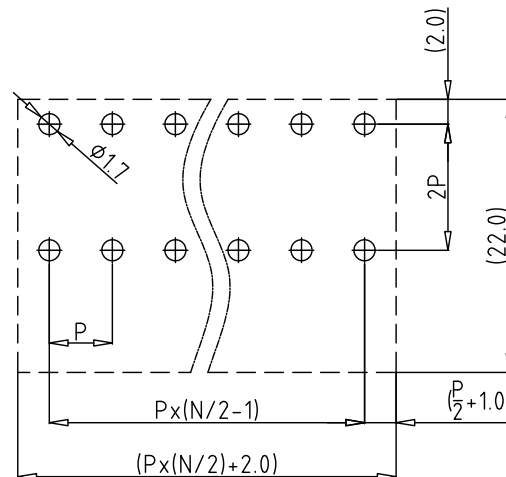


CUSTOMER COPY



RoHS
compliant

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

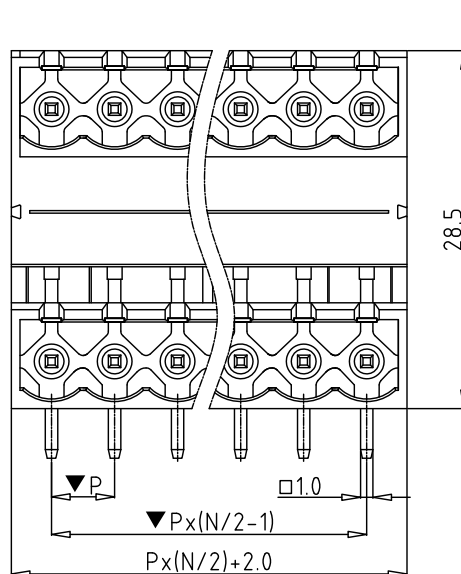

Remmended P.C.B Layout

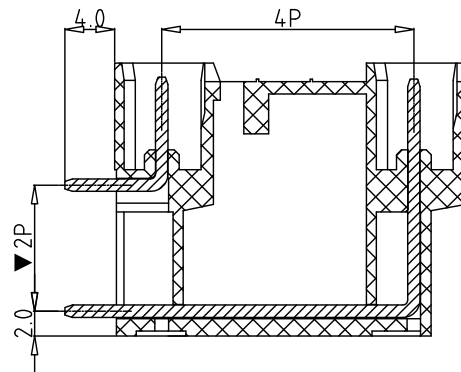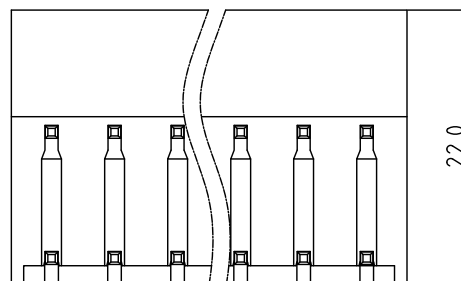

Technical Data

1.Material:

Insulator: NY66,UL94V-0 RoHS

Solder pin: brass, tin plated

2.Electrical:

Current rating:15 A

Voltage rating:300V

Contact resistance: $\leq 20\text{m}\Omega$

Insulation resistance: $\geq 5000\text{M}\Omega$

Withstanding Voltage:1600 V AC/minute

3.Mechanical:

Operating temperature: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $245^{\circ}\text{C} \pm 10^{\circ}\text{C}/5\text{S}$

Critical Dimensions: ▼

Ordering information

PPE	XX	X	1	X	0	X	00
Number of contacts		Pitch	Body type	Color	P.C.B mounting	Mark	Serial No.
04(2x2)~48 (2x24) (pitch5.0/5.08) 04(2x2)~24 (2x12) (pitch10.0/ 10.16) (Solid block)		6 5.0/.197" 7 5.08/.20" H 10.0/.394" I 10.16/.40"	1 Close	0 Black 3 Orange 5 Green 6 Blue 8 Grey (Underline is standard)	0 Right angle	0 No mark 1 natconn 2 Customer 3 Others	00 Standard 01~99 Any special item by customer request

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:			
ANGLE $\pm 2^{\circ}$	DATE	PPE Terminal Block,R/A Type			
X.XXX ± 0.05	DRAWN	唐建平		CUSTOMER: N/A	CUSTOMER P/N: N/A
X.XX ± 0.25	CHECKED	于松		PART NO.:	DRAWING NO.: PPEXXX1X0X00
X.X ± 0.35	APPROVED	冯显东		SIZE: A4	UNIT: mm
X. ± 0.50				SCALE: 1:1	SHEET: 1/1