

CUSTOMER COPY



REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

1.Material:

Insulator:NY66,UL94V-0 RoHS

Solder pin:brass,tin plated

2.Electrical:

Current rating:15A

Voltage rating:300V

Contact resistance: $\leq 20\text{m}\Omega$

Insulation resistance: $\geq 5000\text{M}\Omega$

Withstanding Voltage:1600V AC/minute



3.Mechanical:

Operating temperature:-40°C to+105°C



Soldering temperature:245°C $\pm 10^\circ\text{C}/5\text{S}$

Safety approval:UL file No.:E35592

4.Critical Dimensions:▼

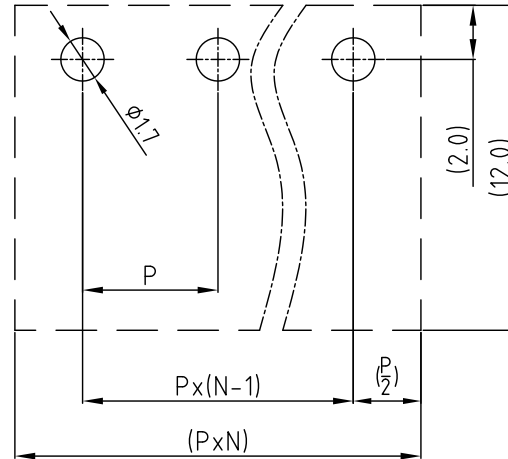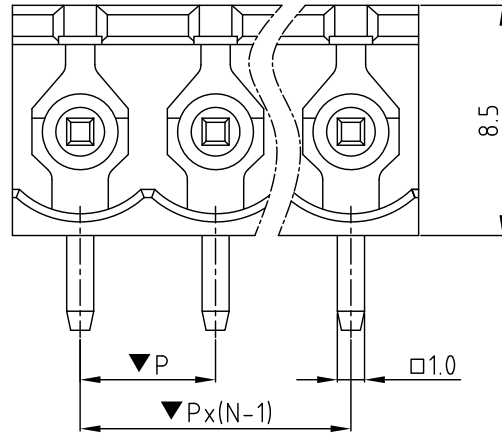

Remmended P.C.B Layout

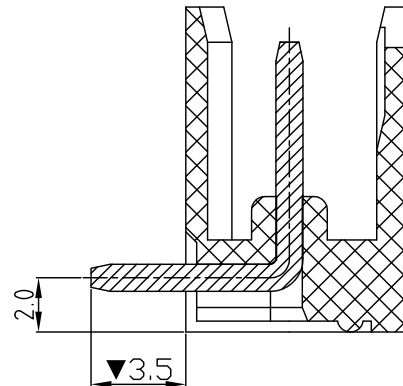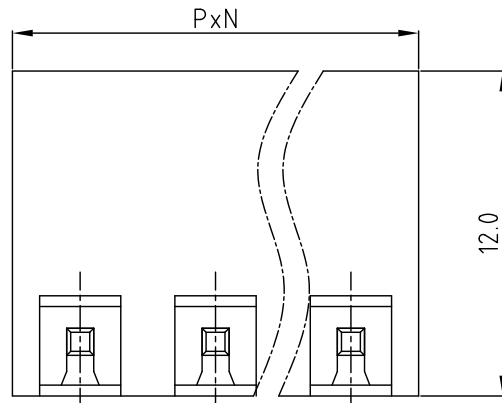

Ordering information

PNE XX		X	X	X	0	X	00
Number of contacts		Pitch	Body type	Color	P.C.B mounting	Mark	Serial No.
02~24(pitch5.0/5.08) 02~12(pitch10.0/10.16) (Solid block)	6 5.0/.197" 7 5.08/.20" H 10.0/.394" I 10.16/.40"	0 Open 3 Open THT (Underline is standard)	0 Black(for THT type) 3 Orange 5 Green 6 Blue 8 Grey (Underline is standard)	0 Right angle	0 No mark 1 natconn 2 Customer 3 Others	00 Standard 01~99 Any special item by customer request	

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

Packing		TOLERANCE:	PROJECTION	TITLE:		
1.General	√	ANGLE $\pm 2^\circ$	DATE	2011/11/05	PNE Terminal Block,R/A Type	
2.Tape&Reel		X.XXX ± 0.05	DRAWN	邹丽婷	CUSTOMER: N/A	CUSTOMER P/N: N/A
3.Tube		X.XX ± 0.20	CHECKED	于松	PART NO.:	DRAWING NO.: PNEXXXXXX0X00
4.Tray		X.X ± 0.30	APPROVED	张丰志	SIZE: A4	UNIT: mm
5.Other		X. ± 0.50			SCALE: 1:1	SHEET: 1/1