

CUSTOMER COPY

RoHS
compliant

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

1.Material:

Insulator:NY66,UL94V-0 RoHS

Contact clamp:phosphor bronze,nickel plated

Wire clamp:steel,zinc plated

Screw:steel M2.5,galvanized plated

2.Electrical:

Current rating:15A

Voltage rating:300V

Contact resistance: $\leq 20\text{m}\Omega$

Insulation resistance: $\geq 5000\text{M}\Omega$

Withstanding Voltage:1600V AC/minute

3.Mechanical:




Wire range:22~12AWG

Screw torque:3.5Lb-in

Wire strip length:6-7mm

Operating temperature:-40°C to+105°C

Critical Dimensions:▼

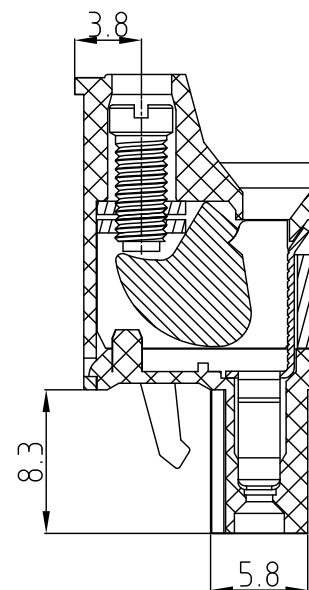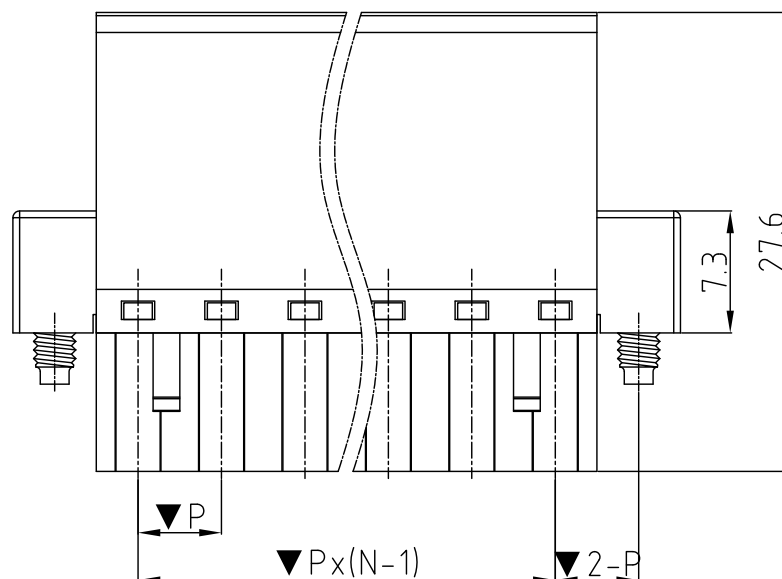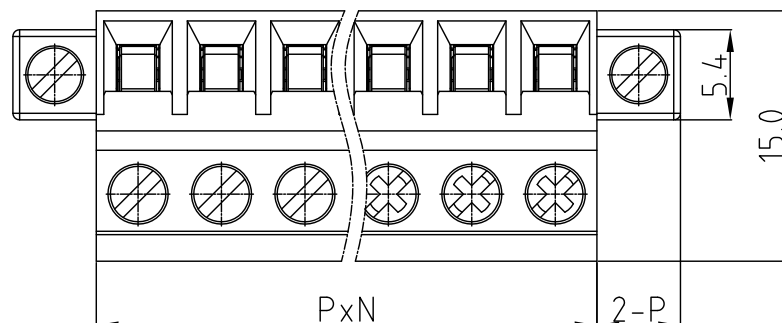

Ordering information

PMD	XX	X	X	X	2	X	00
Number of contacts	Pitch	Screw & Clamp	Color	Body type	Mark	Serial No.	
02~24(pitch5.0/5.08) 02~12(pitch10.0/10.16) (Solid block)	6 5.0/.197" 7 5.08/.20" H 10.0/.394" I 10.16/.40"	4 "-/+ Combination type w/ steel stamping clamp 5 "-Slot type w/ steel stamping clamp	0 Black 3 Orange 5 <u>Green</u> 6 Blue 8 Grey (Underline is standard)	2 With flange	0 No mark 1 natconn 2 Customer 3 Others	00 Standard 01~99 Any special item by customer request	

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:
ANGLE $\pm 2^\circ$ X.XXX ± 0.01 X.XX ± 0.25 X.X ± 0.35 X. ± 0.50	DATE 2014/01/15 DRAWN Sullen CHECKED 唐建平 APPROVED 冯显东	PMD Terminal Block CUSTOMER: N/A CUSTOMER P/N: N/A PART NO.: PMDXXXXX2X00 DRAWING NO.: PMDXXXXX2X00 SIZE: A4 UNIT: mm SCALE: 1:1 SHEET: 1/1