

CUSTOMER COPY






REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

- 1.Material:
Insulator:NY66,UL94V-0 RoHS
Wire guard:stainless steel
Contact clamp:phosphor bronze,nickel plated
- 2.Electrical:
Current rating:10A
Voltage rating:300V
Contact resistance: $\leq 20\text{m}\Omega$
Insulation resistance: $\geq 5000\text{M}\Omega$
Withstanding Voltage:1600V AC/minute
- 3.Mechanical:
Wire range:26~12AWG
Wire strip length:8~9mm
Operating temperature:-40°C to+105°C
- 4.Critical Dimensions:▼

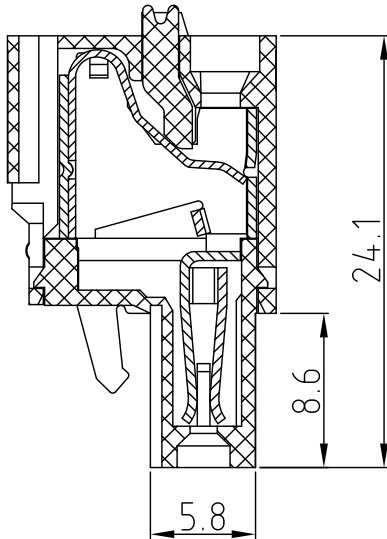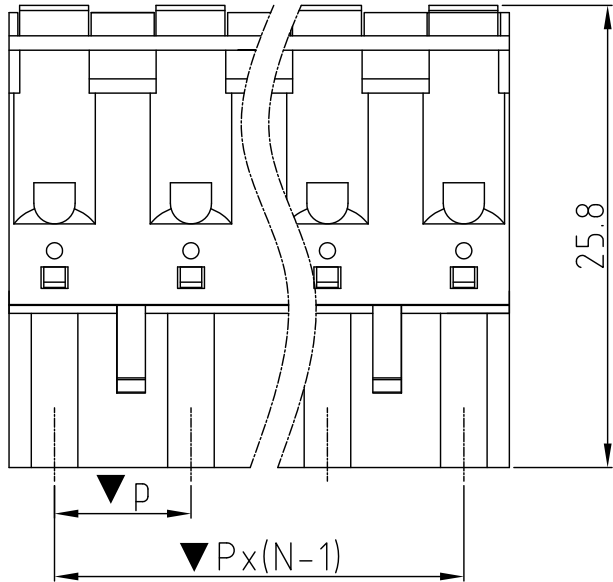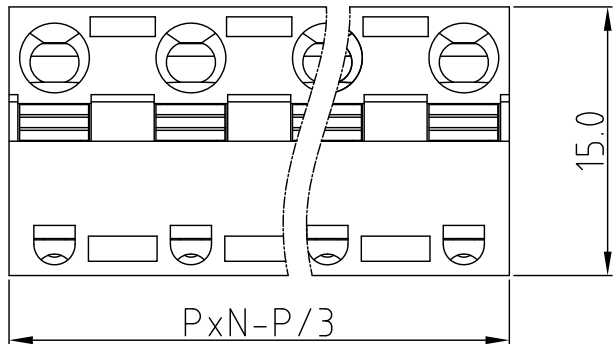

Ordering information

PWF	XX	X	0	X	0	X	00
Number of contacts		Pitch	Boby Color	Boby type	Mark	Serial No.	
02~16(pitch7.5/7.62) 02~08(pitch15.0/15.24) (Solid block)		A 7.5/.295" B 7.62/.30" L 15.0/.591" M 15.24/.60"	0 Black 3 Orange 5 Green 6 Blue 8 Grey (Underline is standard)	0 Without flange	0 No mark 1 natconn 2 Customer 3 Others	00 Standard 01~99 Any special item by customer request	

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:			
ANGLE $\pm 2^\circ$	DATE	2011/11/05	PWF Terminal Block		
X.XXX ± 0.01	DRAWN	Sullen	CUSTOMER:	CUSTOMER P/N:	REV:
X.XX ± 0.25	CHECKED	唐建平	N/A	N/A	N/A
X.X ± 0.35	APPROVED	冯显东	PART NO.:	DRAWING NO.:	REV:
X. ± 0.50				PWFXXX0X0X00	A
			SIZE: A4	UNIT: mm	SHEET: 1/1