

6		5		4		3		2		1				
										REVISION DATA				
										SYM	ECN	DESCRIPTION	DATE	APPROVED

技术参数

1. 材料:

绝缘体: PA66, UL94V-0 RoHS

螺钉: 钢M2.6, 镀锌

钢丝护罩: 不锈钢

端子: 黄铜 (CuZn) , 镀锡

2. 电气:

电流比率: 15A

额定电压: 300V

接触电阻: $\leq 20m\Omega$

绝缘电阻: $\geq 5000M\Omega$

耐受电压: 1600V AC/分钟

3. 机械:

导线范围: 22~14AWG



螺钉扭矩: 3.5Lb-in

线带长度: 6-7mm


工作温度: -40°C至+105°C

焊接温度: 245°C $\pm$ 10°C/5S

4. 关键尺寸: ▼

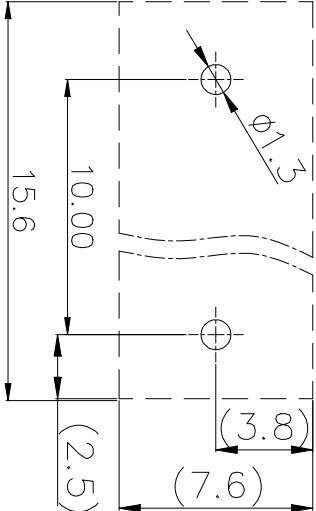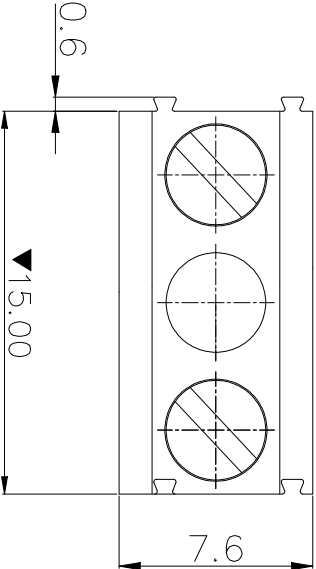

Remmended P.C.B Layout

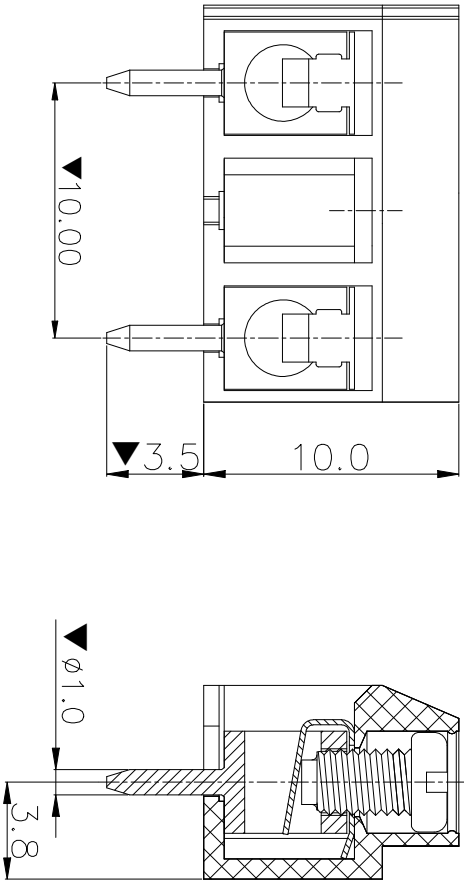

Ordering information

WFA	02	6	1	5	2	1	00
Number of contacts		Pitch	Screw & Clamp		Color	Mark	Serial No.

02~24(pitch5.0)
02~12(pitch10.0)
(02&03 contacts
stockable)

6 5.00/.197"
H 10.0/.394"

0 "-/+ " Combination
type w/ brass machined
1 "-/+ "Spot type w/
brass machined clamp

0 Black
3 Orange
5 Green
6 Blue
8 Grey
(Underline
is standard)

0 No mark
1 natconn
2 Customer
3 Others

00 Standard
01~99 Any
special item
by customer
request

natconn® 广东纳特康电子股份有限公司

GUANGDONG NATCONN ELECTRONIC CO.,LTD.

TOLERANCE:		PROJECTION	TITLE:	
ANGLE	$\pm 2^\circ$	DATE	2025/4/23	WFA Terminal Block
X.XXX	± 0.01	DRAWN	郑双平	CUSTOMER: N/A
X.XX	± 0.25	CHECKED		PART NO.: DRAWING NO.: WFA026152100
X.X	± 0.35	APPROVED		SIZE: A4 UNIT: mm SCALE: 1:1 SHEET: 1/1
X.	± 0.50			