

P

6

5

4

3

2

1



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

NOTE:

Technical data:
Insulator body: Glass filled thermoplastic Polyester.
self-extinguishing, rated UL94-V0

Current Rating: 3 AMP.
Contact Phosphor bronze
plating Gold or tin over nickel

Operating Temperature: -40°C to +105°C.



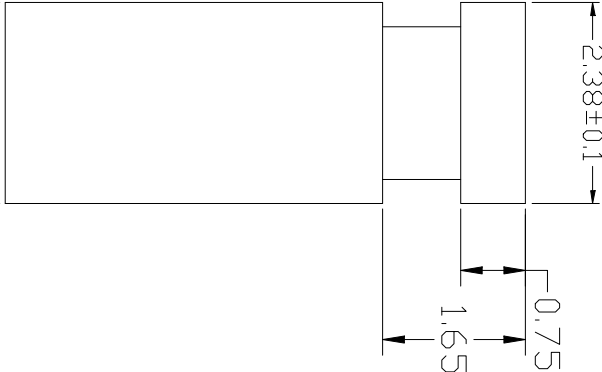


TABLE A

PART NO.	HOUSING COLOR
MJ-A01A0E0B00	BLACK
MJ-A01A0E2B00	RED
MJ-A01A0E4B00	YELLOW
MJ-A01A0E5B00	GREEN
MJ-A01A0E6B00	BLUE
MJ-A01A0E9B00	WHITE

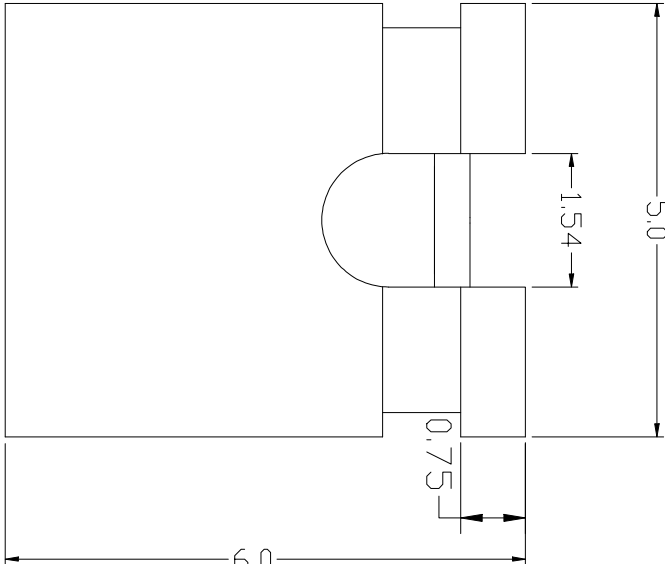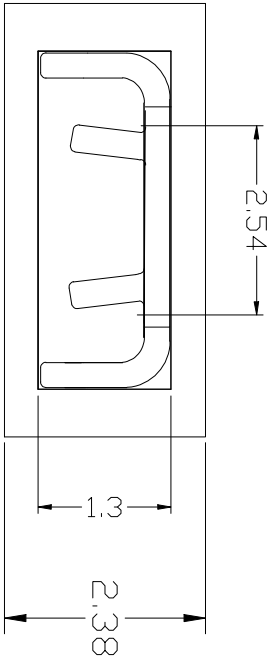

Ordering information

MNJ - H

E

XX

X

Pitch
F 2.0mm
H 2.54mm

Height Option
A 4.50mm
B 6.50mm
C 6.00mm
D 8.00mm
E 13.50mm

Color Option
BK Standard black color
BU Blue
RD Red
YL Yellow
WH White
GN Green

Type Option
A Open Type
B Close Type

Packing		natconn® 广东纳特康电子股份有限公司									
1.General	√	TOLERANCE: ±2°									
2. Reel		PROJECTION		TITLE:							
3. Tube		DATE	2024.1.20	MJ PH2.54 开口型 H:6.0							
4. Tray		DRAWN	班洪鏢	CUSTOMER: N/A		CUSTOMER P/N: N/A		REV: N/A		REV: N/A	
5. Other		CHECKED		PART NO.: MJ-A01A0EXB00		DRAWING NO.: MJ-A01A0EXB00		REV: A		REV: A	
		APPROVED		SIZE: A4		UNIT: mm		SCALE: 1:1		SHEET: 1/1	