

6

5

4

3



2

1

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Material:
Housing: Polyester Glass Filled,UL 94V-0 RoHS
Contact: Phosphor Bronze,Au plated
Electrical:
Current Rating:1A.
Voltage Rating:250V AC/DC
Withstanding Voltage:1000V AC/Minute.
Contact resistance: ≤20mΩ/contact
Insulation resistance: 1000MΩ minute
Mechanical:
Operating temperatures : -40°C to +105°C

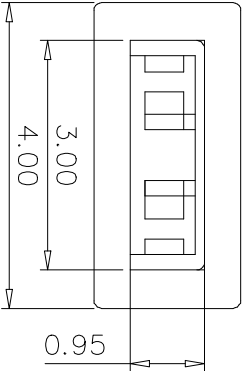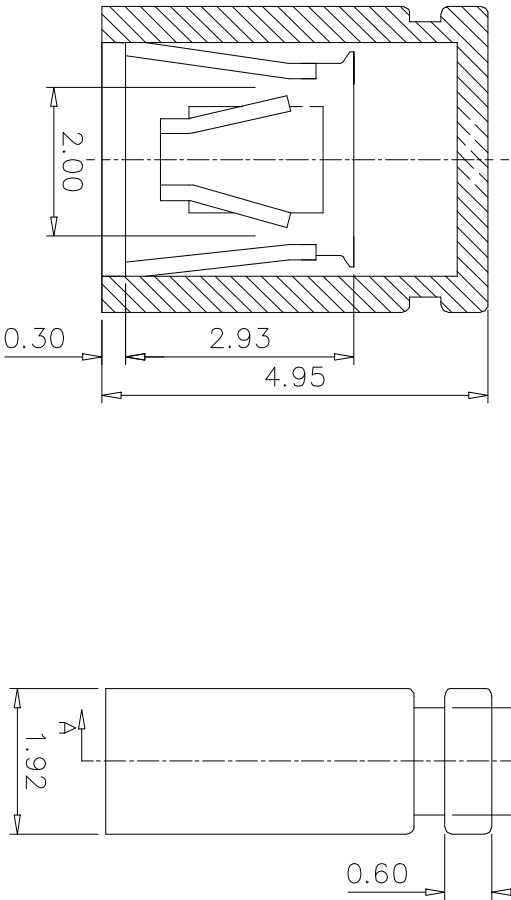

MJ - X XX X XX B 01

Pitch
F 2.0mm
H 2.54mm


No. of positions
02 2Pin

Hight Option
A 4.95mm
B 6.50mm
C 6.00mm
D 8.00mm
E 13.0mm

Color Option
0 Black
3 YELLOW
5 Green
6 Blue
Z Special

Close Type

Serial No.
00-999

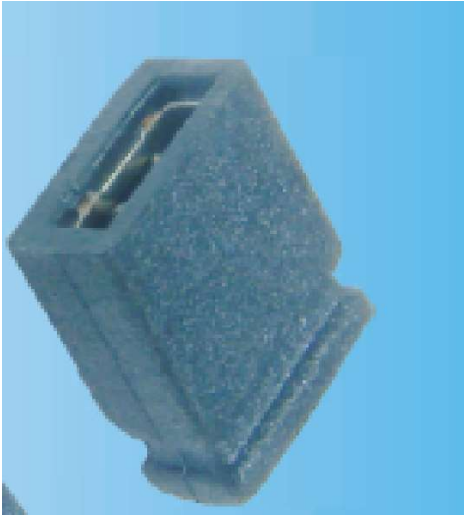

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:		PROJECTION		TITLE:		CUSTOMER P/N:		REV:
ANGLE ±2°		DATE		2.0mm Pitch Mini Jumper		na		na
X.XXX ±0.01		DRAWN		Close type		na		na
X.XX ±0.15		CHECKED		PART NO.:		DRAWING NO.:		REV:
X.X ±0.25		APPROVED		冯显东		NP-MJB01		A
X. ±0.50		SIZE:		A4		UNIT: mm		SHEET: 1/1
		SCALE:		3:1				