


REVISION DATA			
SYM	ECN	DESCRIPTION	DATE

MATERIAL:


HOUSING : PBT,UL94V-0,BLACK.
TERMINALS BRACKET: PBT,UL94V-0,BLACK.
SHIELD: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.
TERMINAL: PHOSPHOR BRONZE C5210,I=0.35MM,
6U" GOLD PLATING ON CONTACT AREA.

MECHANICAL:

DURABILITY : 750 CYCLES MIN.
MATING FORCE : 23N MAX.
OPERATING TEMPERATURE: -40°C~+85°C.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH ¹¹±0.11




TOP VIEW

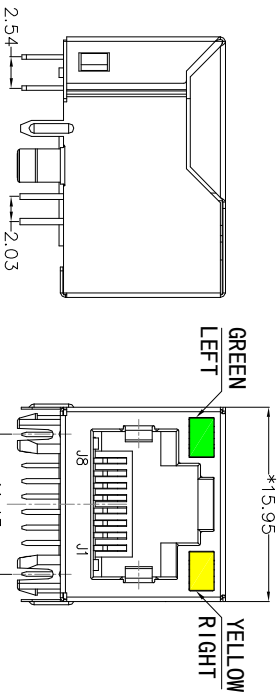



LEFT SIDE VIEW

FRONT VIEW

RIGHT SIDE VIEW




BACK VIEW



BOTTOM VIEW

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE



natconn®

广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:		PROTECTION		TITLE:	
ANGLE ±2°		DATE	2020/3/2	RJ45 Connector 1000BASE	
X.XXX ±0.01		DRAWN		CUSTOMER:	CUSTOMER P/N:
X.XX ±0.15		CHECKED		PART NO.:	DRAWING NO.:
X.X ±0.25		APPROVED		SIZE:	UNIT:
X. ±0.50				A4	mm
				SCALE:	SHEET:
				1:1	1/1