

CUSTOMER COPY

RoHS
compliant

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

NOTES:

ELECTRICAL:





- | | |
|--------------------------|------------------------------|
| 1. VOLTAGE RATING | :125 VAC RMS. |
| 2. CURRENT RATING | :1.5 AMP. |
| 3. CONTACT RESISTANCE | :30 MILLIOHMS MAX. |
| 4. INSULATION RESISTANCE | :500 MEGOHMS MIN @ 500V DC . |
| 5. DIELECTRIC STRENGTH | :1000V AC RMS 50Hz. 1MIN. |

MECHANICAL:

- | | |
|-----------------------------|----------------------------------|
| 1. HOUSING MATERIAL | :GLASS FILLED POLYESTER UL94V-0. |
| 2. CONTACT MATERIAL | :PHOSPHOR BRONZE ϕ 0.46mm. |
| 3. PLATING | :GOLD PLATING OVER NICKEL. |
| 4. OPERATING | :750 CYCLES MIN. |
| 5. PCB RETENTION PRE-SOLDER | :1 LB MIN. |

ENVIRONMENTAL:

- | | |
|----------------------|------------------|
| 1. Temperature Range | : -45℃~+85℃ |
| 2. Relative Humidity | : 90~95% (40±2℃) |

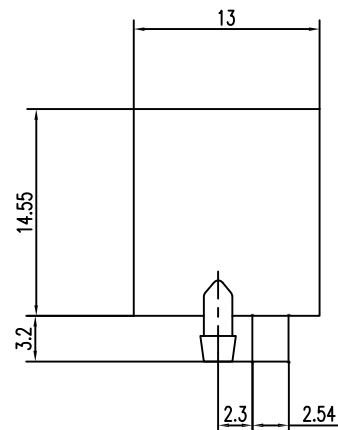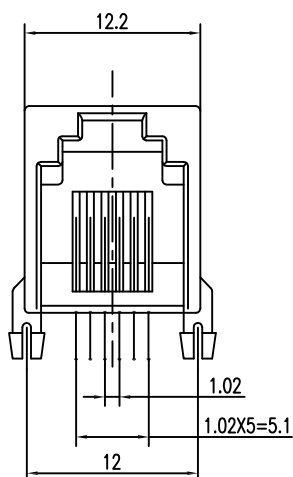

Ordering information(Part No.)

RJ06 - XX AB-16

Contact Plating

- | | |
|----|----------|
| 01 | Gold1μ" |
| 02 | Gold3μ" |
| 03 | Gold6μ" |
| 04 | Gold15μ" |
| 05 | Gold30μ" |
| 06 | Gold50μ" |
| 07 | Special |

Packing

- | | |
|-------------|---|
| 1.General | |
| 2.Tape&Reel | |
| 3.Tube | |
| 4.Tray | ✓ |
| 5.Other | |

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:		
ANGLE ±2°	DATE	2014/07/01	RJ 6P6C Black	
X.XXX ±0.01	DRAWN	邹丽婷	CUSTOMER:	CUSTOMER P/N:
X.XX ±0.25	CHECKED	于松	N/A	N/A
X.X ±0.35	APPROVED	张丰志	PART NO.:	DRAWING NO.:
X. ±0.50				
			SIZE: A4	UNIT: mm
			SCALE: 1:1	SHEET: 1/1