

P

6

5

4

3

2

1


P

Green LED-L

Yellow LED-R

32.10±0.20

28.44±0.15

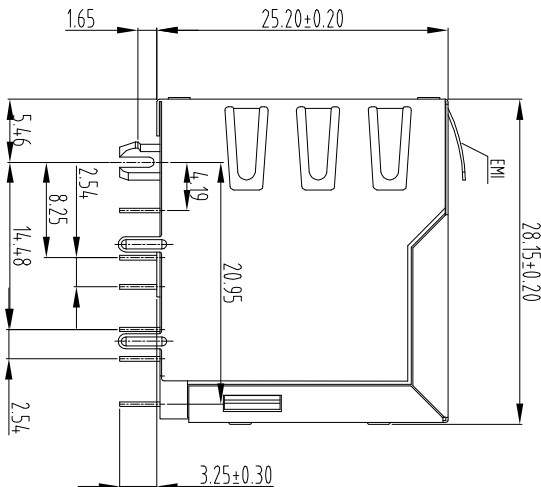

NOTES:

MATERIAL:

- 1.HOUSING
- 2.CONTACT (ROUND PIN Φ 0.45mm)
- 3.SHIELD
- 4.LED
- GLASS FILLED POLYESTER UL94V-0
- PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL.
- 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
- OPTION

ELECTRICAL:

- 1.VOLTAGE RATING :125V AC
- 2.CURRENT RATING :15AMP
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC
- 5.DIELECTRIC WITHSTANDING VOLTAGE :1000V AC RMS 50Hz OR 60Hz, 1MIN.

MECHANICAL:


- 1.INSETION FORCE :2.2Kg MAX.
- 2.RETENTION FORCE :1.7kg BETWEEN JACK AND PLUG
- 3.DURABILITY :750 CYCLES MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40°C ~85°C
- 2.OPERATION : -40°C TO 85°C

THE MARTS MODULAR PLUG CONFORMAING TO FCC PART68

PART NUMBER:

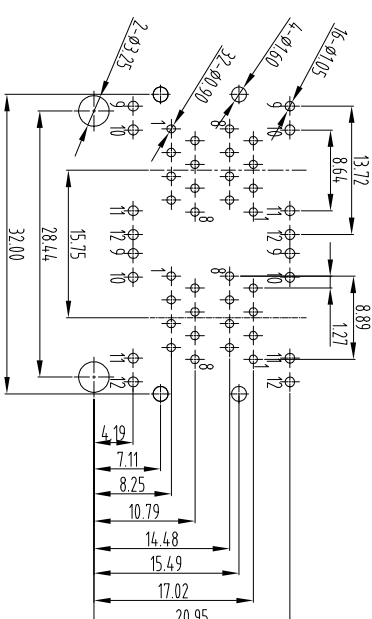

PCB LAYOUT/TOP VIEW

natconn®

广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

Packing

1.General ✓

2. Reel

3. Tube

4. Tray

5. Other

TOLERANCE: $\pm 2^\circ$

ANGLE $\pm 2^\circ$

X.XXX ± 0.15

X.XX ± 0.30

X.X ± 0.40

PROJECTION

DATE 2024/06/20

DRAWN 班洪德

CHECKED 莫健勇

APPROVED 冯显东

TITLE:

RJ45 SERIES 2XN LED JACK

CUSTOMER: N/A

PART NO.:

SIZE: A4

UNIT: mm

SCALE: 1:1

SHEET: 1/1

CUSTOMER P/N: N/A

DRAWING NO.: NTC-RJ45X074

REV: A

305

- RJ

XX

X

X

X

074

No. of Positions
00-99

Plating Option
A GF
B Au5u"
C Au10u"
D GF15u"
S Sn120u"
Z Special

Insulator Material
Option
A PBT
B PA66
C PA6T
D PPS
E LCP
F PA6T
G PC
H Special
Z

Color
A BLACK
B GREY
C BEIGE
D WHITE
E NATURAL

Serial NO.
001-999

9 GREEN 10 11 YELLOW 12