

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

技术参数

1.材质:


- 1.1 圆孔外壳: 黄铜
1.2 爪子: 镀铜, 6爪
1.3 塑胶(标准): PPS, 黑色, UL94V-0, RoHS

2.电气性能:

- 2.1 额定电流: 1Amps/contact max.
2.2 接触阻抗: $\leq 10m\Omega$ /contact
2.3 绝缘阻抗: $\geq 1000M\Omega$ at V=100V
2.4 耐电压: 500V AC/minute

3.机械性能:

- 3.1 配合端针直径: 0.305-0.483mm
3.2 测试针直径: 0.381mm
3.3 插入力: 单根针至多60g
3.4 拔出力: 单根针至少15g
3.5 机械寿命: 至少100次
4.重点管控尺寸: ▼

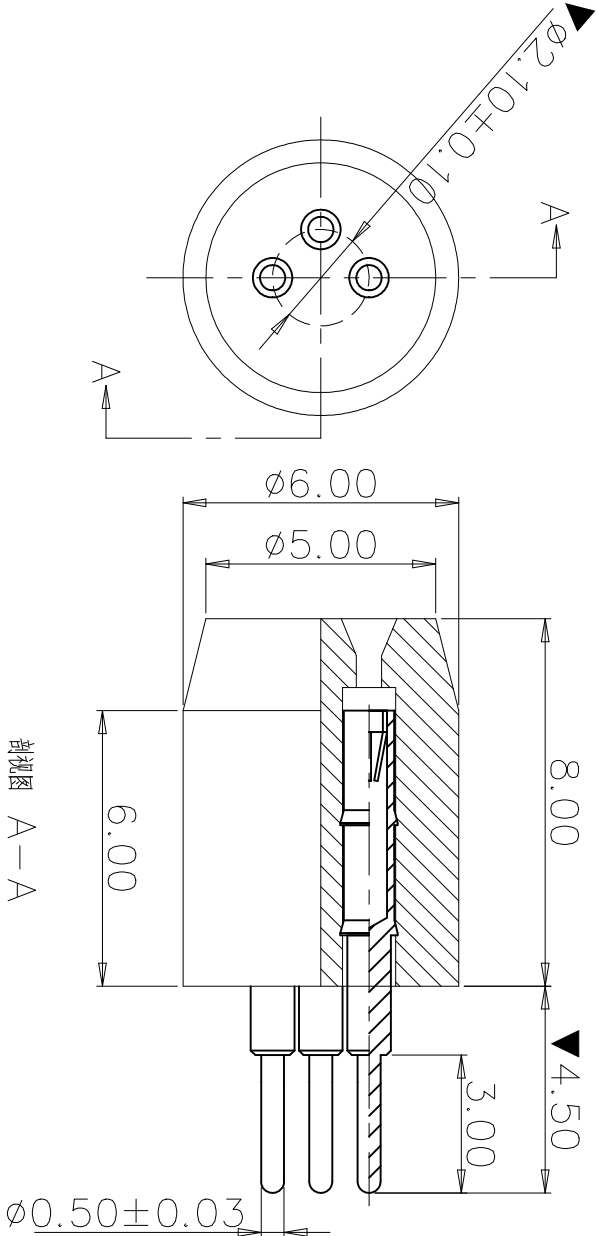

剖视图 A—A

STR-003 1 - A P P 1050A

No. of Positions	Insulator Type code	Pin Plating code	Clip Plating code
003 3P	1 A Type 2 B Type	1 Tin150μ" 2 Tin200μ" 3 GF 4 Gold2μ" 5 Gold3μ" 6 Gold10μ" 7 Gold15μ" S Special	1 Tin150μ" 2 Tin200μ" 3 GF 4 Gold2μ" 5 Gold3μ" 6 Gold10μ" 7 Gold15μ" S Special

Packing		natconn® 东莞市纳特康电子有限公司 DONGGUAN NATCONN ELECTRONIC CO.,LTD											
1.General	√	TOLERANCE:		PROJECTION		TITLE:							
2.Tape&Reel		ANGLE ±2°				STR Socket 3Pins		A Type Pin Length 10.50mm					
3.Tube		X.XXX ±0.01		DRAWN		Sullen		CUSTOMER: na		CUSTOMER P/N:		REV: na	
4.Tray		X.XX ±0.15		CHECKED				PART NO.:		DRAWING NO.:		REV: A	
5.Other		X. ±0.30		APPROVED				SIZE: A4		UNIT: mm		SCALE: 6:1	
												SHEET: 1/1	