

P

6

5

4






3

2

1



REVISION DATA			
SYM	ECN	DESCRIPTION	DATE

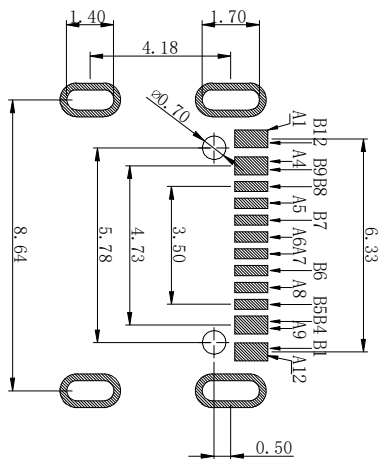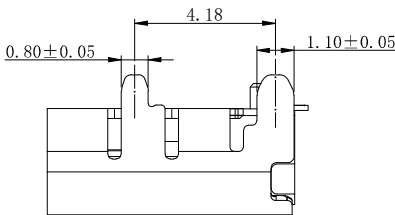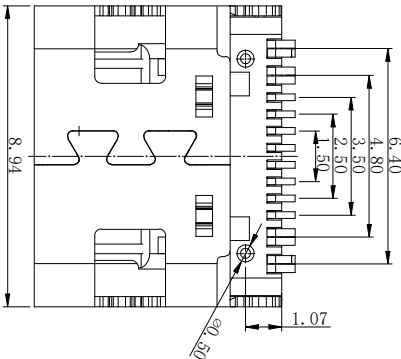


RECOMMENDED P.C.B LAYOUT

NOTES:

1. MECHANICAL: MATING FORCE: 5-20N .
UNMATING FORCE: 8-20N .
DURABILITY: 10000 CYCLES MIN.

2. ELECTRICAL:

- CURRENT: 3A/5.0A MAX
 - VOLTAGE: 20V MAX
 - WITHSTANDING VOLTAGE: 100V AC
 - CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES
3. ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE -30° C ~ +80° C
4. Salt Spray: 48H

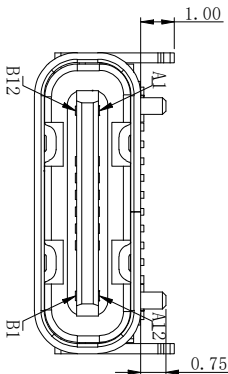

Packing		TITLE:			
1.General	√				
2. Reel		natconn® 广东纳特康电子股份有限公司 GUANGDONG NATCONN ELECTRONIC CO.,LTD			
3. Tube					
4. Tray					
5. Other					
TOLERANCE: ANGLE ±2°		PROJECTION		TYPE C 16PIN 四脚插板母座	
		DATE	2026/04/08		
		DRAWN	黎恒		
		CHECKED	莫健勇		
		APPROVED	邓文祥		
X. XXX ±0.15		CUSTOMER:	N/A	CUSTOMER P/N:	REV:
X. XX ±0.30		PART NO.:	N/A	DRAWING NO.:	REV:
X. X ±0.40		SIZE:	A4	UNIT:	A
X. ±0.40		APPROVED	邓文祥	SCALE:	1:1
				SHEET:	1/1