


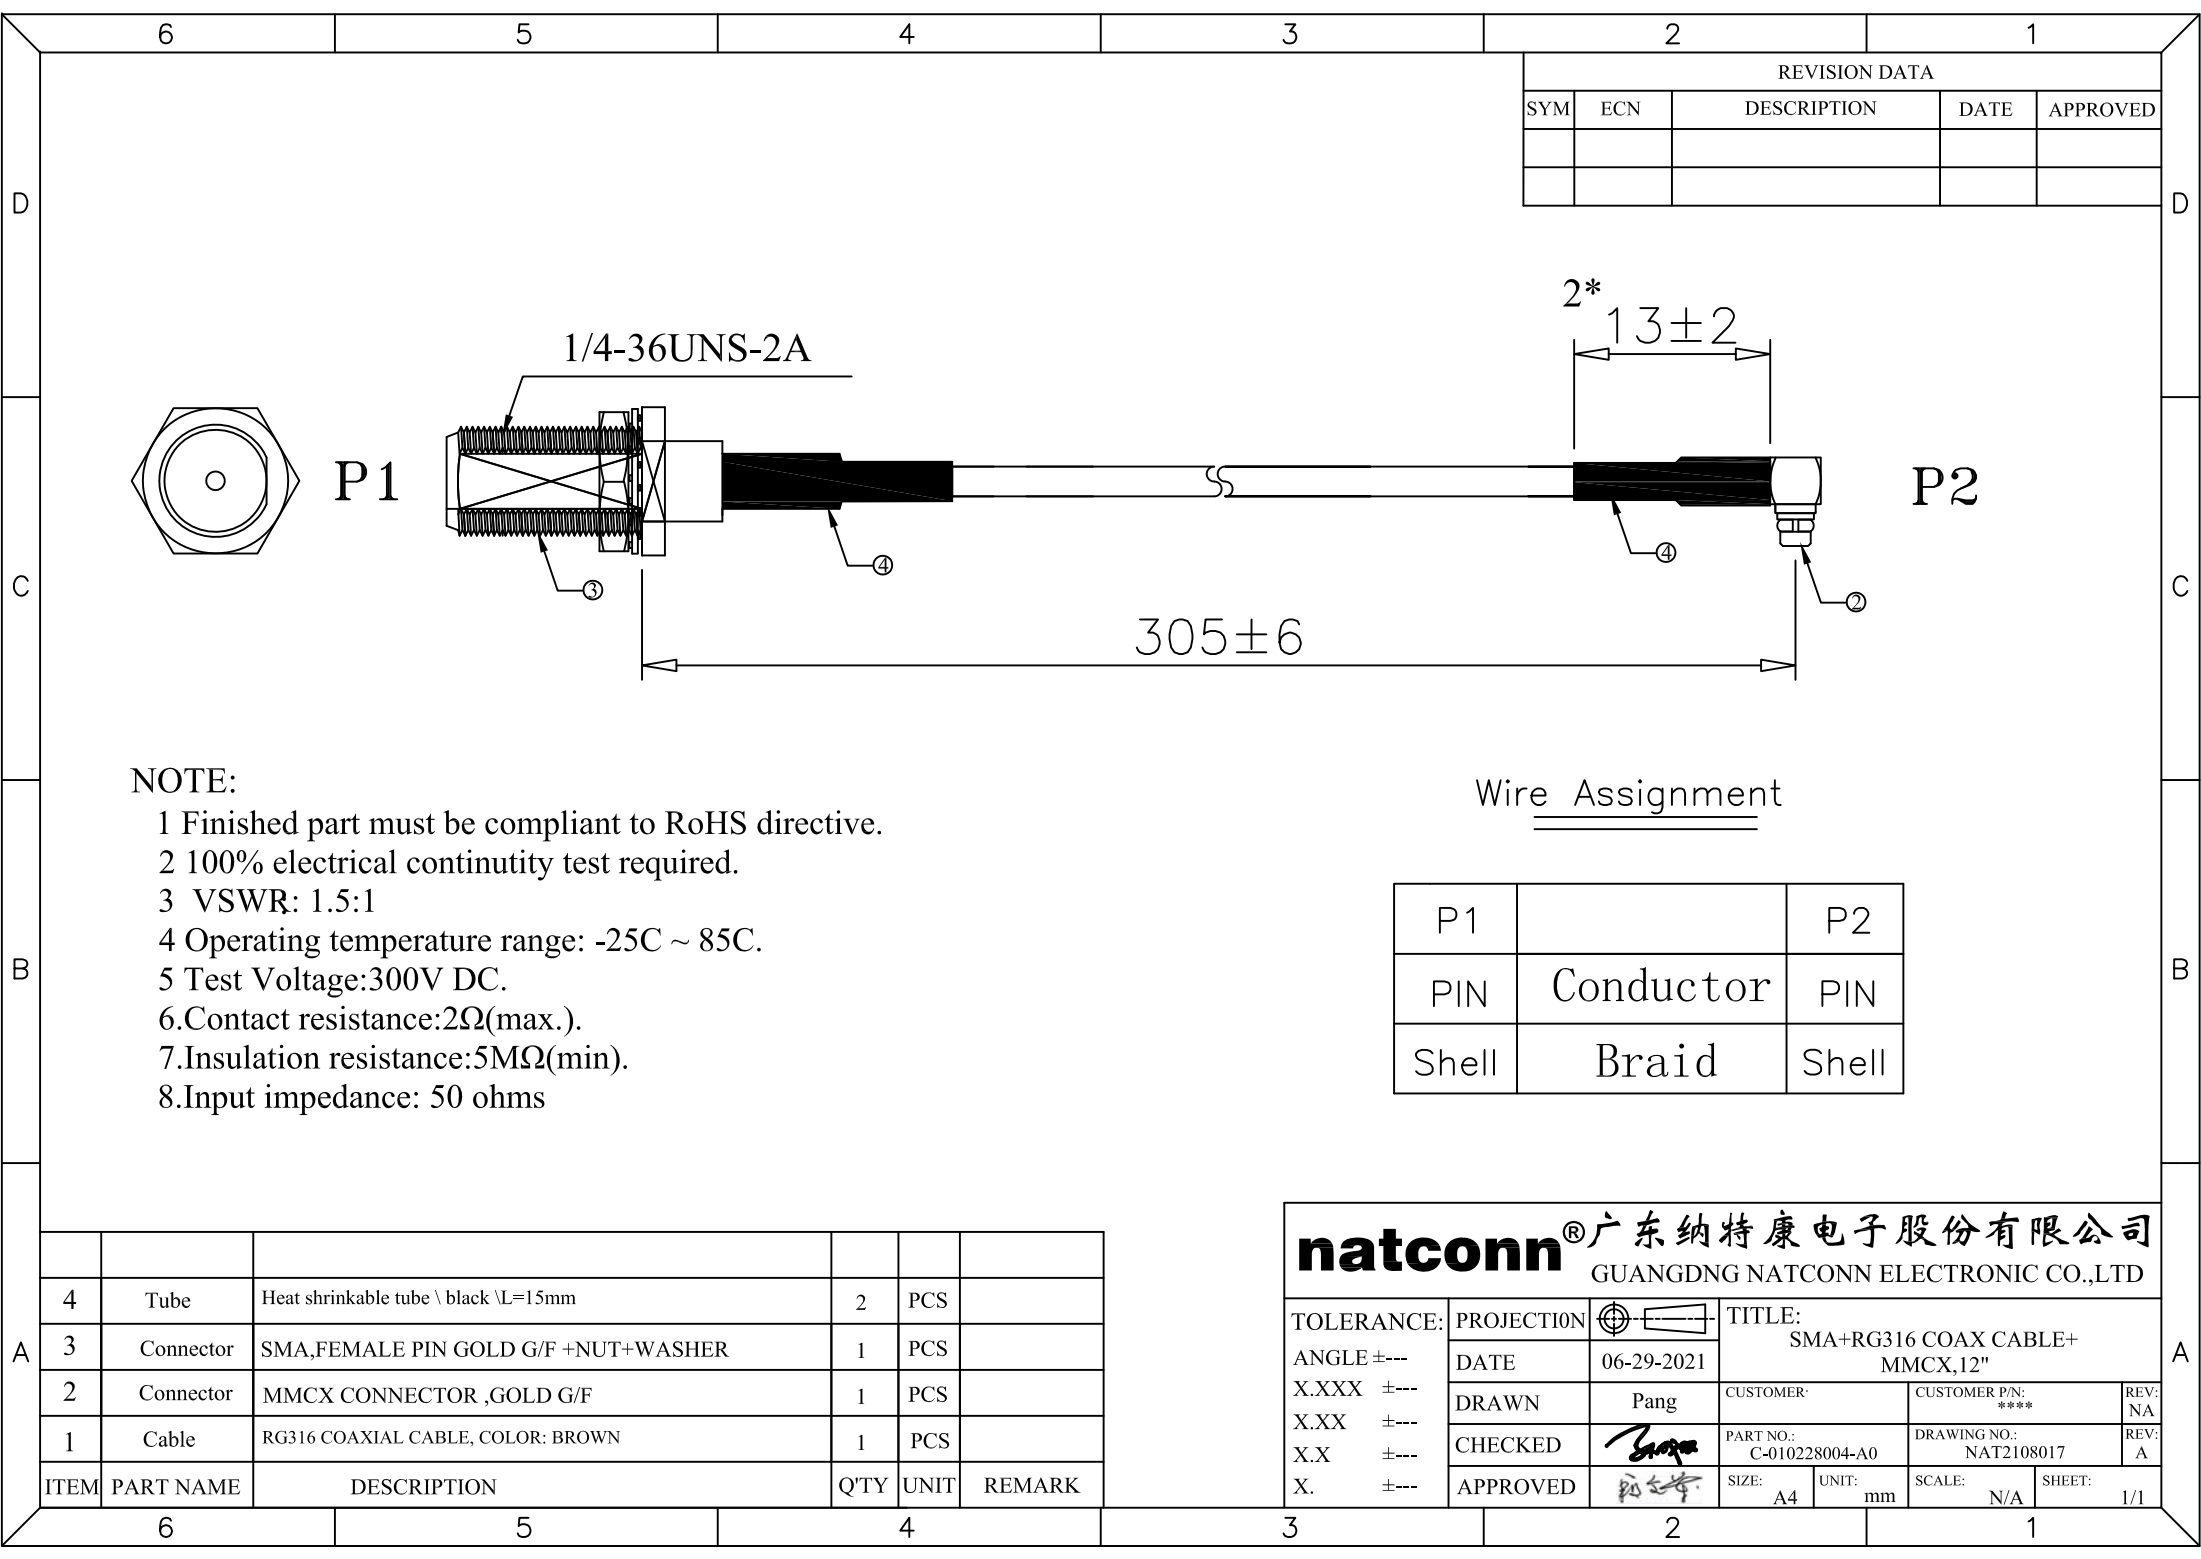

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

NOTE:

- 1 Finished part must be compliant to RoHS directive.
- 2 100% electrical continuity test required.
- 3 VSWR: 1.5:1
- 4 Operating temperature range: -25C ~ 85C.
- 5 Test Voltage:300V DC.
- 6.Contact resistance:2Ω(max.).
- 7.Insulation resistance:5MΩ(min).
- 8.Input impedance: 50 ohms

Wire Assignment

P1		P2
PIN	Conductor	PIN
Shell	Braid	Shell

ITEM	PART NAME	DESCRIPTION	Q'TY	UNIT	REMARK
4	Tube	Heat shrinkable tube \ black \L=15mm	2	PCS	
3	Connector	SMA,FEMALE PIN GOLD G/F +NUT+WASHER	1	PCS	
2	Connector	MMCX CONNECTOR ,GOLD G/F	1	PCS	
1	Cable	RG316 COAXIAL CABLE, COLOR: BROWN	1	PCS	

natconn®广东纳特康电子股份有限公司 GUANGDNG NATCONN ELECTRONIC CO.,LTD					
TOLERANCE: ANGLE ±--- X.XXX ±--- X.XX ±--- X.X ±--- X. ±---	PROJECTION		TITLE: SMA+RG316 COAX CABLE+ MMCX,12"		
	DATE	06-29-2021			
	DRAWN	Pang	CUSTOMER:	CUSTOMER P/N: ****	REV: NA
	CHECKED		PART NO.: C-010228004-A0	DRAWING NO.: NAT2108017	REV: A
	APPROVED		SIZE: A4	UNIT: mm	SCALE: N/A
			SHEET: 1/1		