

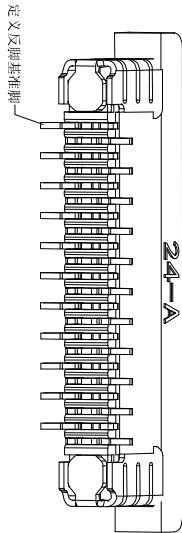
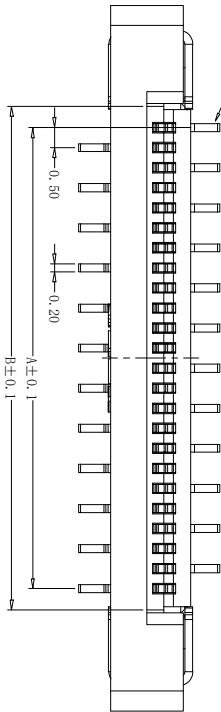


定义反脚基准脚




RoHS
compliant


REVISION DATA			
SYM	ECN	DESCRIPTION	DATE

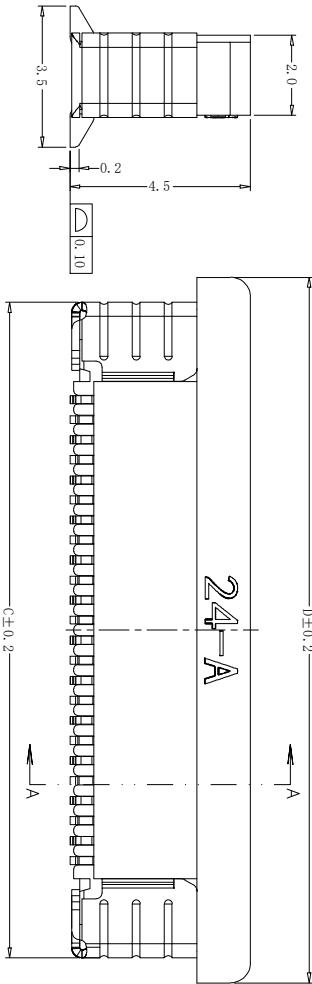

PROPER CABLE (SCALE 2:1)



定义反脚基准脚

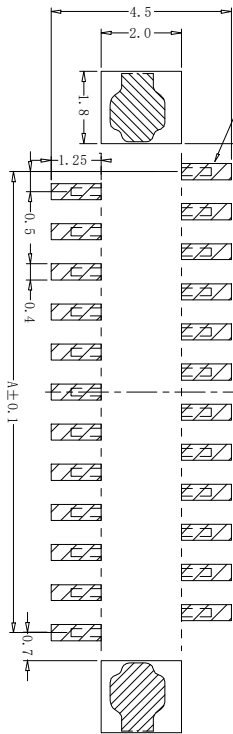

PCB LAYOUT
TOLERANCE: ±0.05

Ordering information

FBC1- XX XX - A 89

Pin NO 04 to 60	Contact Plating 01 Tin 02 Gold Flash 03 GoldTin	Guide NO 01-99
--------------------	--	-------------------

技术要求(Technical Index):

1. 材质与表面处理(Material And Finish):
基座 (Housing) and 盖子 (Cover): LCP U194V-0 Nature Or Black;
端子 (Terminal) : Phosphor Copper Au/Sn Plated;
焊片 (Solder) : Copper Alloy Au/Sn Plated;
2. 工作温度(Temperature range): -25° C~+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC.
4. 额定电流: 0.4A, AC/DC.
5. 接触电阻(Contact resistance): ≤20mΩ
6. 绝缘电阻(Insulation resistance): ≥500MΩ
7. 耐电压(Withstanding Voltage): 200V AC/minute.

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°		PROJECTION	TITLE:	0.5mm FPC (A 型) 立贴反脚	
X.XXX ±0.05	DATE	2023.6.19			
X.XX ±0.25	DRAWN		M/O	CUSTOMER: N/A	REV: N/A
X.X ±0.35	CHECKED			PARTNO.:	DRAWING NO.: FBC1-XXXX-A89
X. ±0.50	APPROVED			SIZE: A4	UNIT: mm
				SCALE: 1:1	SHEET: 1/1