
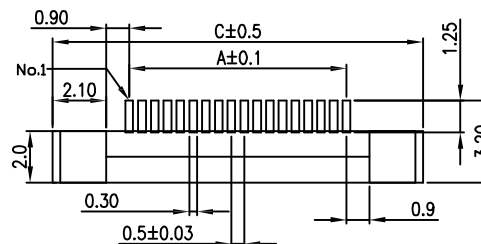
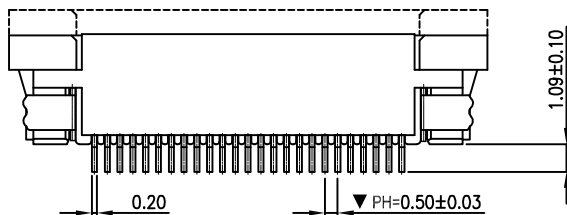
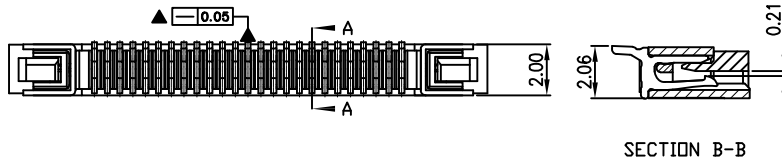
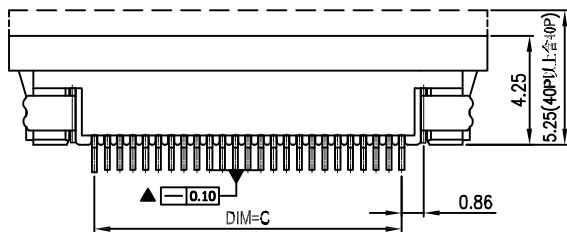


CUSTOMER COPY


RoHS
compliant

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED
B		UPDATE DRAWING	2015/07/09	唐建平

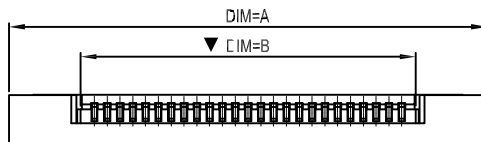

适用线路板

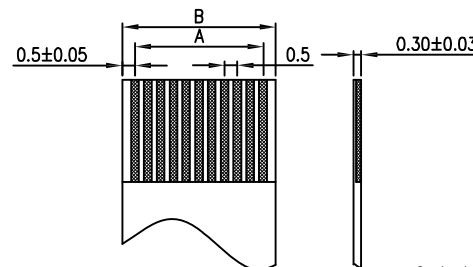

适用FPC寸法

Ordering information

FBC1XX

XXA-15

No. of Pins

04-50

Contact Plating

01=Sn

02=AU

NOTES:

- HOUSING MATERIAL: HEAT RESISTANCE PLASTIC(UL94 V-0)
ACTUATOR MATERIAL: HEAT RESISTANCE PLASTIC(UL94 V-0)
- TERMINAL MATERIAL: PHOSPHOR BRONZE C5210R-SH.
GOLD FLASH PLATING ON CONTACT AREA.
- FITTING NAIL MATERIAL: PHOSPHOR BRONZE C5191R-H.
2.54 um [100u"] MIN. MATTE-TIN PLATING ON SOLDER TAIL AREA.
- CRITICAL DIMENSIONS:▼

Packing

1.General

2.Tape&Reel

3.Tube

4.Tray

5.Other

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: PROJECTION

ANGLE ±2°

X.XXX ±0.01

X.XX ±0.25

X.X ±0.35

X. ±0.50

DATE

DRAWN

CHECKED

APPROVED

2014/06/25

邹丽婷

于松

张丰志

TITLE:

PITCH 0.5mm FPC CONN SMT (上接)

CUSTOMER:

N/A

PART NO.:

FBC1XXXXA-15

CUSTOMER P/N:

N/A

DRAWING NO.:

FBC1XXXXA-15

REV:

N/A

REV:

B

SIZE:

A4

UNIT:

mm

SCALE:

1:1

SHEET:

1/1