T/NO.	P80000073		

SYM	REV.	ECN	DESCRIPTION	DATE

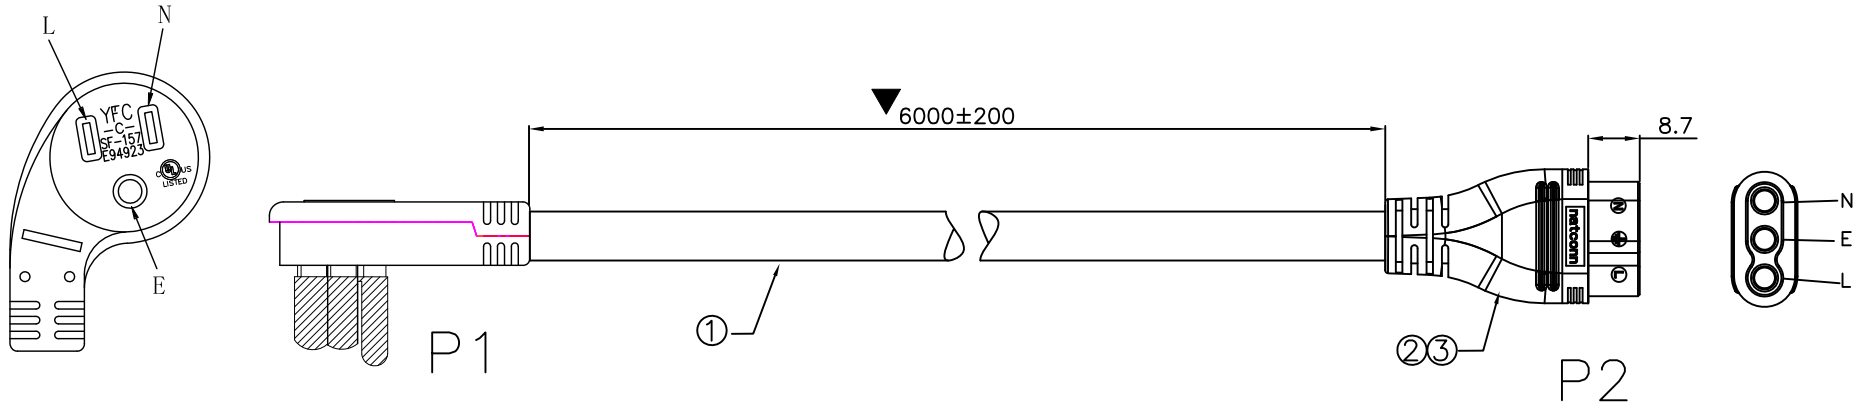

NOTE:

1. 100% test short open miswire
2. Insulation resistance:20MΩ(min)
3. Contact resistance:5Ω(max.)
4. Test Voltage:300V DC/AC/0.1S
5. Rated Voltage: 110V. Rated Current: 16A
6. All materials shall comply with RoHS

WIRING LIST

P1	COLOUR	P2
N	WHITE	N
E	GREEN	E
L	BLACK	L

ITEM	P/N	DESCRIPTION	PART NO.	Q'TY	UNIT
3	Compound	PVC Common Plug Material 45P Black UL94-V0	100-080000002	0.010	KG
2	CONN	F Model Aircraft Series 6.5mm 3P PA66 Yellow With Soldering Cup	303-990000003	1	PCS
1	CABLE	SJT 14AWG*3C American Standard Plug OPEN L=6050mm	C-100214027	1	PCS

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

GENERAL TOLERANCE UNLESS SPECIFIED					
ANGLE	±2°	PROJECTION		TITLE: US standard AC 3-pin TO yellow 3-female 14AWG L= 6000mm	
X.XXX	±0.05	DATE	02-14-2023		
X.XX	±0.1	DRAWN	吴韩	CUSTOMER:	CUSTOMER P/N: S / REV: N/A
X.X	±0.2	CHECKED		PART NO.: C-100214027-A0	DRAWING NO.: NAT2302010 / REV: A
X.	±0.3	APPROVED		SIZE: A4 / UNIT: mm	SCALE: NONE / SHEET: 1/1