




SYM	REV.	ECN	DESCRIPTION	DATE

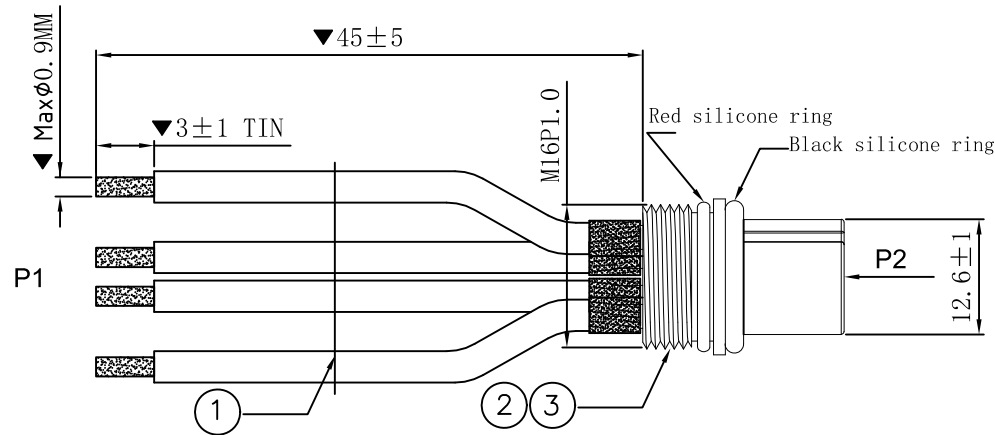

P2 Diagram showing the direction of the



This black plastic nut comes with the main body, 10 sets per bag
(as shown in the picture on the right)



NOTE:

- 100% test short open miswire
- Insulation resistance:20M Ω (min)
- Contact resistance:5 Ω (Max.)
- Test Voltage:300V DC/AC/0.1S
- All materials shall comply with RoHS
- "▼"As the focus control size

Wiring diagram

P1	Color	P2
TIN	Red	1
TIN	Black	2
TIN	Yellow	3
TIN	White	4

3	TUBE	Black Heat Shrink Tubing ϕ 3.0 600V L=10mm ROHS2.0	501-000000078	4	PCS
2	CONN	Industrial connector 4P female plug, green body, red and black silicone rings, black nylon casing, female pins made of phosphor bronze with gold plating ROHS2.0	303-160010000	1	SET
1	WIRE	UL 1007 24AWG 80° C 300V Whit ROHS2.0 L=44mm	300-002409000	1	PCS
		UL 1007 24AWG 80° C 300V Yellow ROHS2.0 L=44mm	300-002404000	1	PCS
		UL 1007 24AWG 80° C 300V Red ROHS2.0 L=44mm	300-002402000	1	SET
		UL 1007 24AWG 80° C 300V Black ROHS2.0 L=44mm	300-002400000	1	PCS
ITEM	P/N	DESCRIPTION	PART NO.	Q'TY	UNIT

natconn® 广东纳特康电子股份有限公司 GUANGDONG NATCONN ELECTRONIC CO.,LTD					
GENERAL TOLERANCE UNLESS SPECIFIED		PROJECTION		TITLE: Industrial 4P Waterproof Female Connector TO TIN L=45mm	
ANGLE	±2°	DATE	09-21-2023	CUSTOMER:	
X.XXX	±0.1	DRAWN	KevinSun	CUSTOMER P/N:	N/A
X.XX	±0.5	CHECKED		PART NO.:	C-031624000-A0
X.X	±1	APPROVED		DRAWING NO.:	NAT2309018
X.	±2			SIZE:	A4
				UNIT:	mm
				SCALE:	NONE
				SHEET:	1/1