


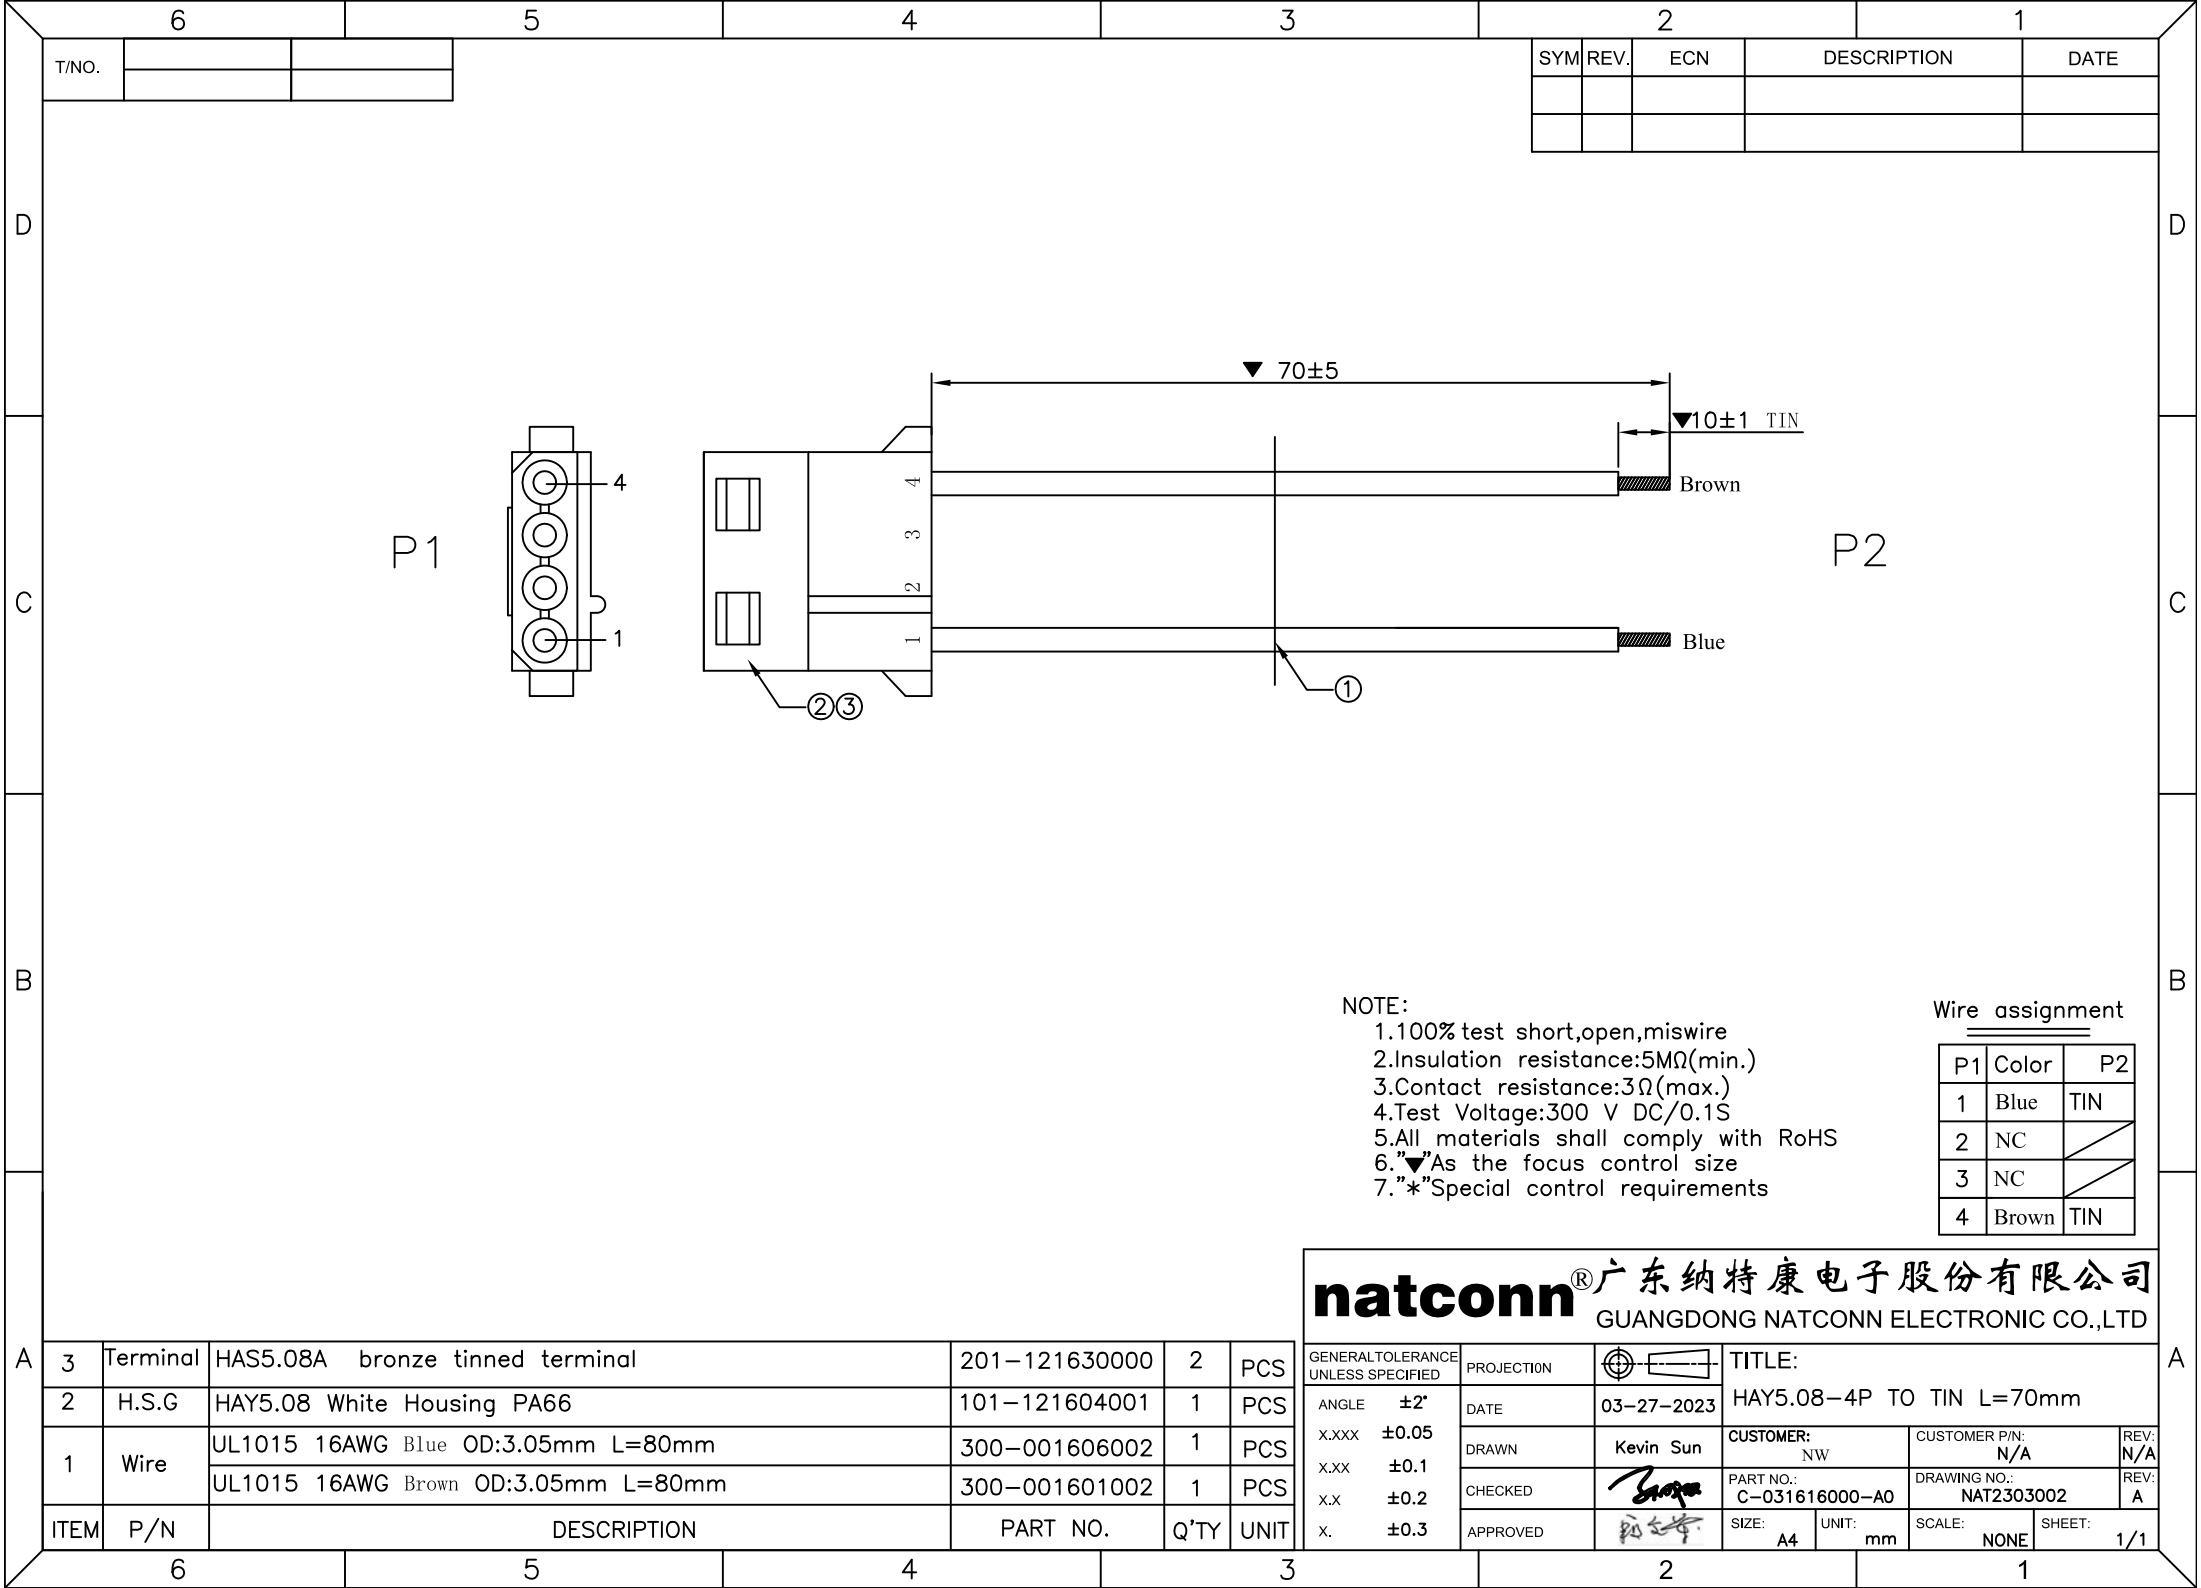

NOTE:
1.100% test short,open,miswire
2.Insulation resistance:5MΩ(min.)
3.Contact resistance:3Ω(max.)
4.Test Voltage:300 V DC/0.1S
5.All materials shall comply with RoHS
6."▼"As the focus control size
7."*"Special control requirements

Wire assignment

P1	Color	P2
1	Blue	TIN
2	NC	
3	NC	
4	Brown	TIN

natconn®广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

3	Terminal	HAS5.08A bronze tinned terminal	201-121630000	2	PCS
2	H.S.G	HAY5.08 White Housing PA66	101-121604001	1	PCS
1	Wire	UL1015 16AWG Blue OD:3.05mm L=80mm	300-001606002	1	PCS
		UL1015 16AWG Brown OD:3.05mm L=80mm	300-001601002	1	PCS
ITEM	P/N	DESCRIPTION	PART NO.	Q'TY	UNIT

GENERAL TOLERANCE UNLESS SPECIFIED	PROJECTION		TITLE: HAY5.08-4P TO TIN L=70mm		
ANGLE ±2°	DATE	03-27-2023			
X.XXX ±0.05	DRAWN	Kevin Sun	CUSTOMER: NW	CUSTOMER P/N: N/A	REV: N/A
X.XX ±0.1	CHECKED		PART NO.: C-031616000-A0	DRAWING NO.: NAT2303002	REV: A
X.X ±0.2	APPROVED		SIZE: A4	UNIT: mm	SCALE: NONE
X. ±0.3					SHEET: 1/1