

D

C

B

A

D


C

B

A

SYM	REV.	ECN	DESCRIPTION	DATE

P1

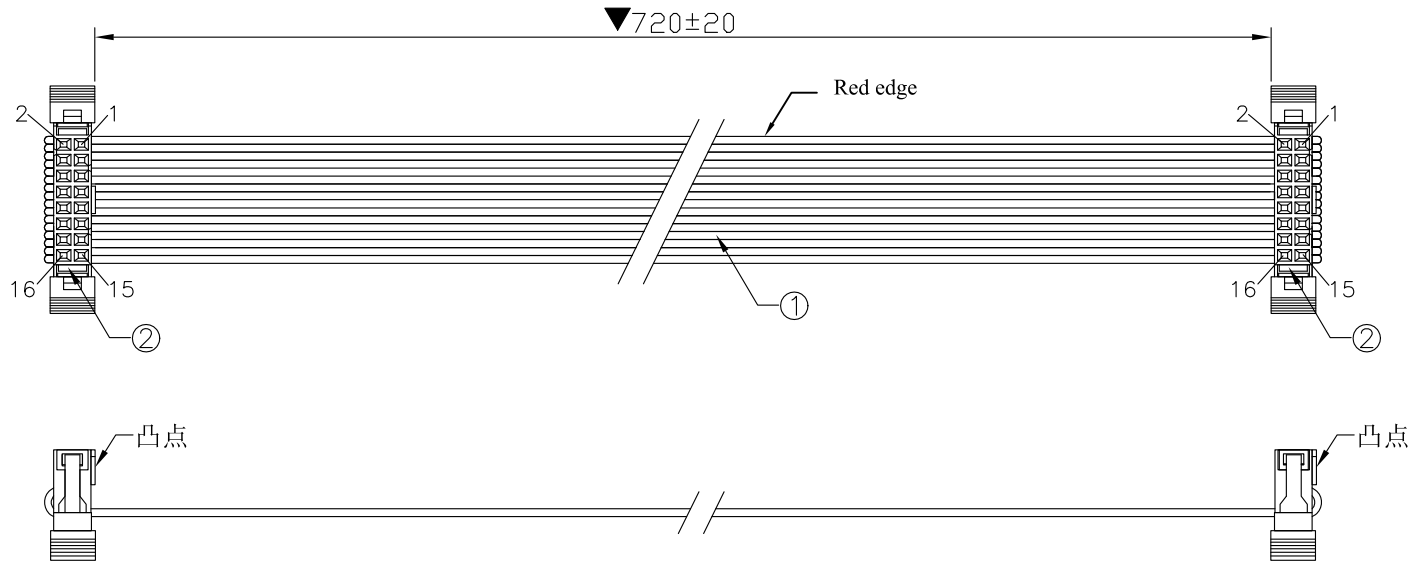

P2

WIRE LIST

P1	COLOUR	P2
1	Red	1
2	Black	2
3	Black	3
5		5
14	Black	14
15	Black	15
16	Black	16

NOTE :

- 1.100% test short,open,miswire
- 2.Insulation resistance:5MΩ(min.)
- 3.Contact resistance:3Ω(max.)
- 4.Test Voltage:300 V DC/0.01S
- 5.All materials shall comply with RoHS
- 6.▼"As the focus control size

natconn®广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

GENERAL TOLERANCE UNLESS SPECIFIED	PROJECTION	TITLE: UL2651 28AWG*16C灰排线 蝴蝶扣三件式 2.54IDC-2*8P BOTH ENDS L=720mm		
ANGLE ±2°	DATE	07-01-2022	CUSTOMER: 艾比森	CUSTOMER P/N: 201330S728AW20047
X.XXX ±0.05	DRAWN	WUHAN	PART NO.: C-050816026-A0	DRAWING NO.: NAT2207001
X.XX ±0.1	CHECKED		SIZE: A4	UNIT: mm
X.X ±0.2	APPROVED		SCALE: NONE	SHEET: 1/1
X. ±0.3				

2	IDC	Butterfly button 2.54IDC-2*8P, PBT black three-piece	303-050816002	2	PCS
1	WIRE	UL2651 28AWG*16P Gray with red edges PH:1.27mm L=755mm	300-022816002	1	PCS
ITEM	P/N	DESCRIPTION	PART NO	Q'TY	UNIT

6

5

4

3

2

1