


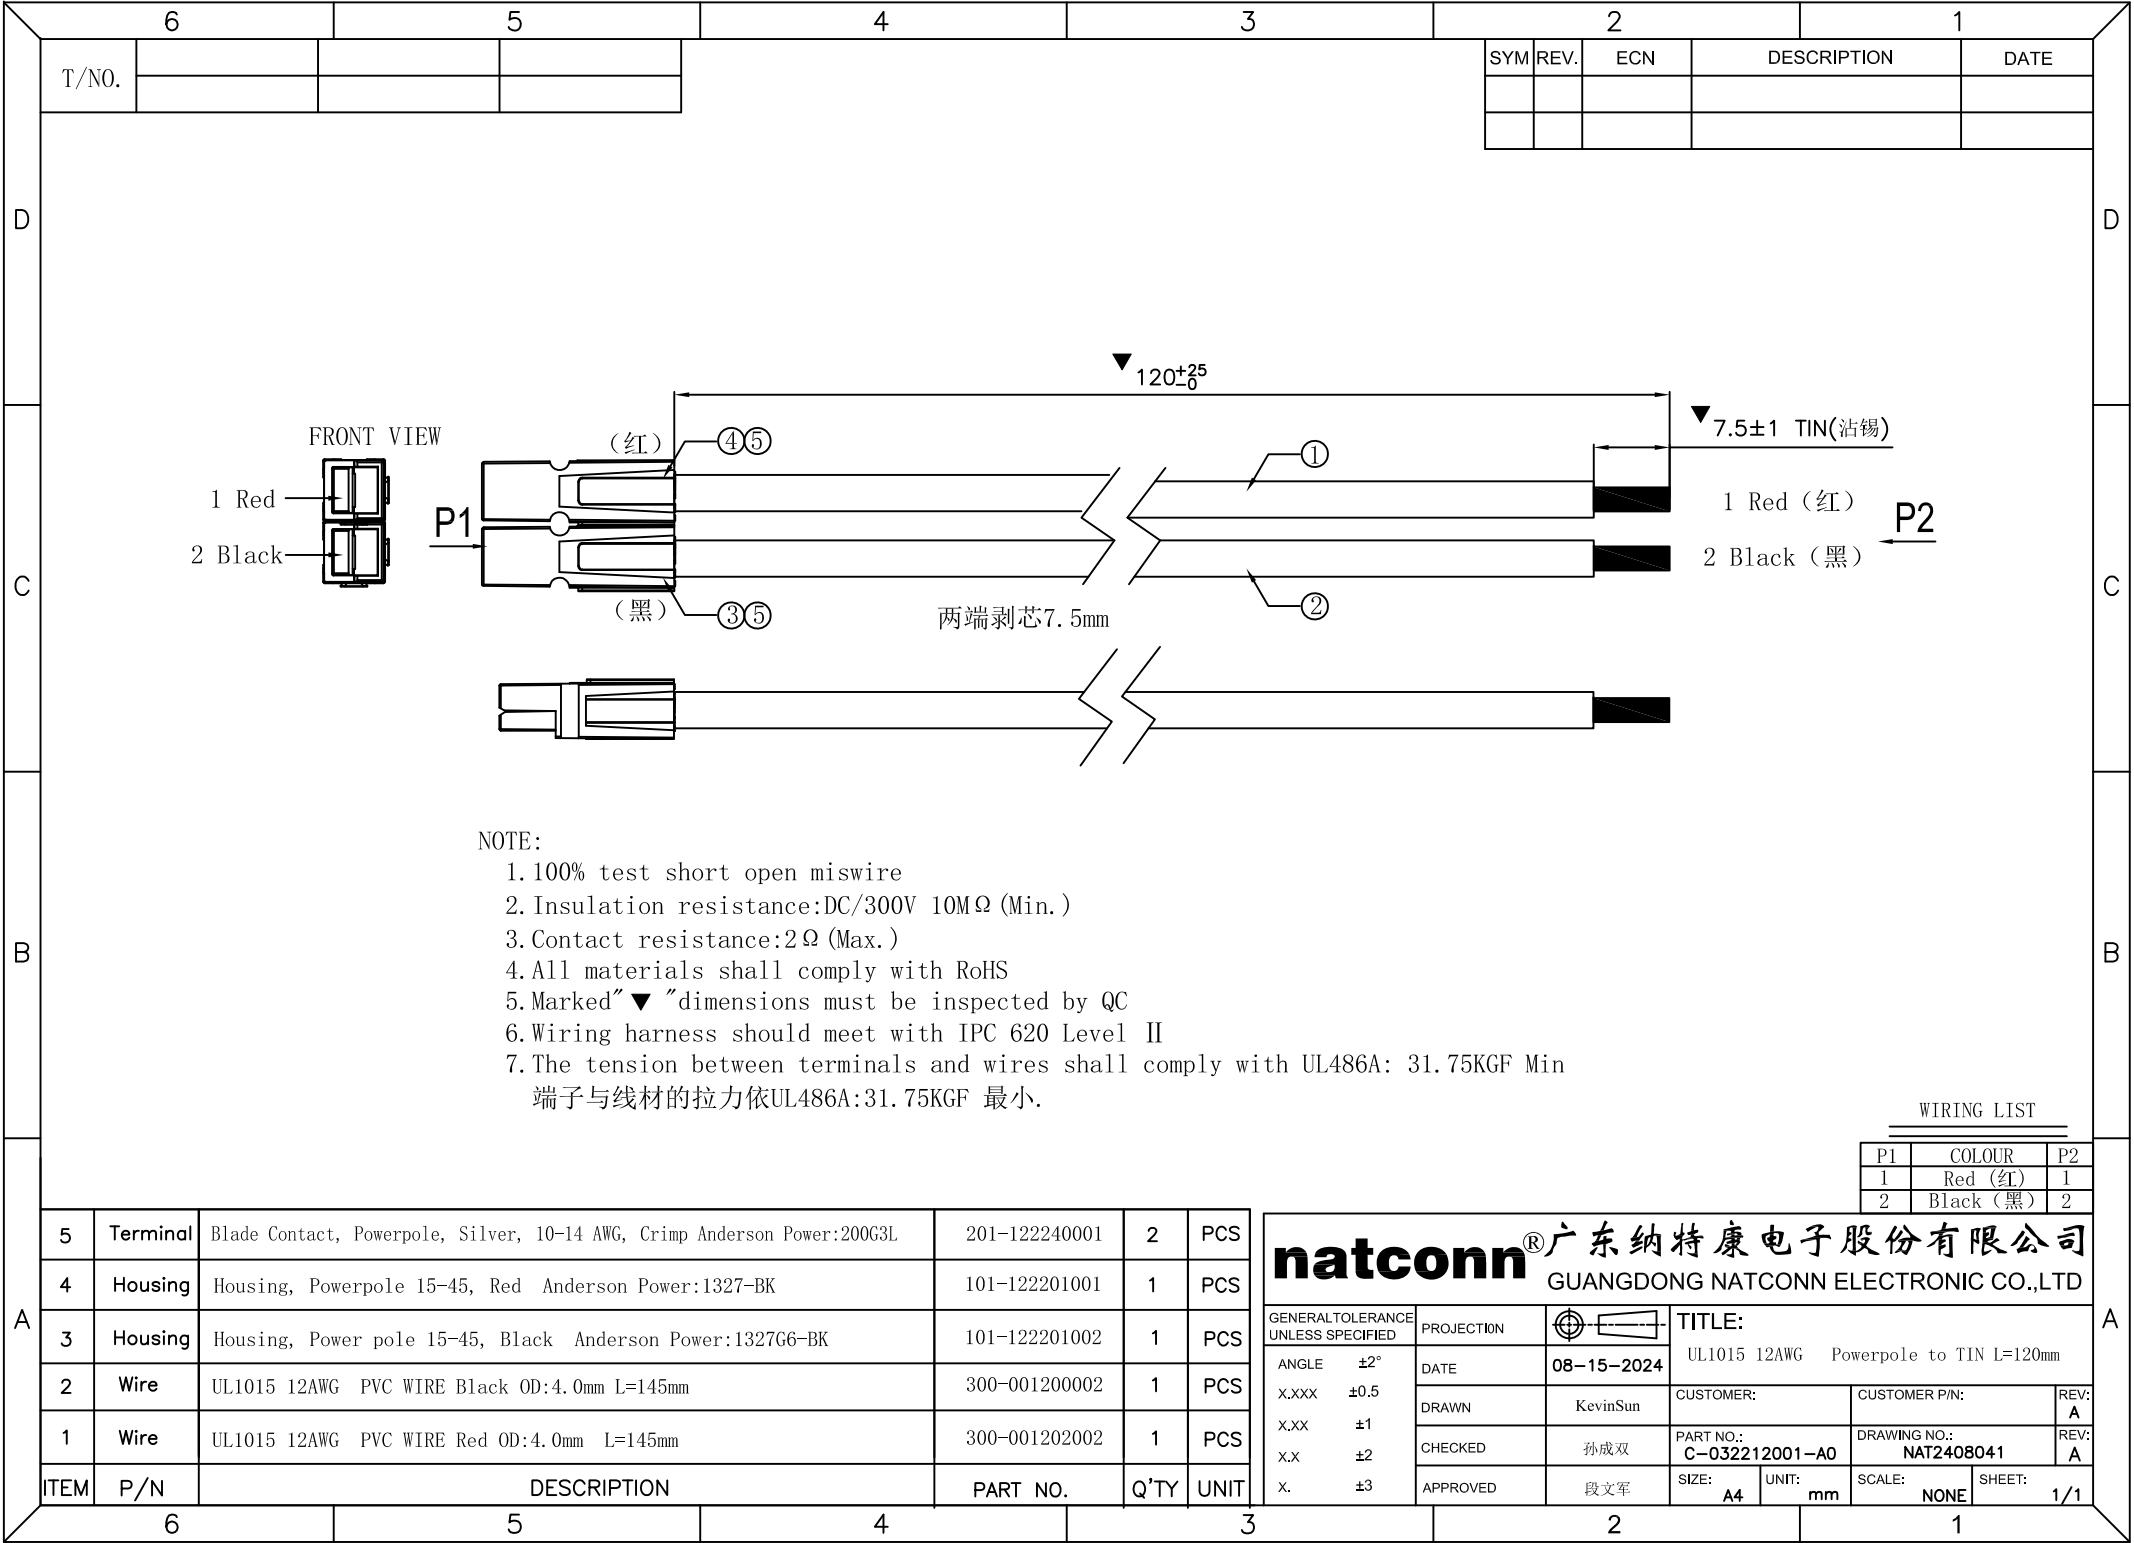

NOTE:

- 1.100% test short open miswire
- 2. Insulation resistance:DC/300V 10MΩ (Min.)
- 3. Contact resistance:2Ω (Max.)
- 4.All materials shall comply with RoHS
- 5.Marked"▼"dimensions must be inspected by QC
- 6.Wiring harness should meet with IPC 620 Level II
- 7.The tension between terminals and wires shall comply with UL486A: 31.75KGF Min

端子与线材的拉力依UL486A:31.75KGF 最小.

WIRING LIST		
P1	COLOUR	P2
1	Red (红)	1
2	Black (黑)	2

5	Terminal	Blade Contact, Powerpole, Silver, 10-14 AWG, Crimp Anderson Power:200G3L	201-122240001	2	PCS
4	Housing	Housing, Powerpole 15-45, Red Anderson Power:1327-BK	101-122201001	1	PCS
3	Housing	Housing, Power pole 15-45, Black Anderson Power:1327G6-BK	101-122201002	1	PCS
2	Wire	UL1015 12AWG PVC WIRE Black OD:4.0mm L=145mm	300-001200002	1	PCS
1	Wire	UL1015 12AWG PVC WIRE Red OD:4.0mm L=145mm	300-001202002	1	PCS
ITEM	P/N	DESCRIPTION	PART NO.	Q'TY	UNIT

natconn[®]广东纳特康电子股份有限公司

GUANGDONG NATCONN ELECTRONIC CO.,LTD

GENERAL TOLERANCE UNLESS SPECIFIED		PROJECTION	TITLE:		
ANGLE	±2°	DATE	08-15-2024		
X,XXX	±0.5	DRAWN	KevinSun		
X,XX	±1	CHECKED	孙成双		
X,X	±2	APPROVED	段文军		
X.	±3				
SIZE: A4		UNIT: mm	SCALE: NONE		

CUSTOMER:

CUSTOMER P/N:

REV: A

PART NO.: C-032212001-A0

DRAWING NO.: NAT2408041

REV: A

SHEET: 1/1